



MUNDUS  
UNIVERSAL  
RP  
BEYOND  
EA  
TP/TA  
MANET  
Compact/  
Concept  
SG  
Wall connection  
profile  
MR 22/MR 28

## Fittings for Toughened Glass Assemblies

Technical brochure 2020



# Content



**06 MUNDUS**  
Components for toughened glass assemblies



**40 UNIVERSAL**  
Components for toughened glass assemblies




**94 RP**  
Double-action door system for toughened glass assemblies



**100 BEYOND**  
Double-action door system for toughened glass assemblies



**110 EA**  
Components for single-action doors



**124 TP/TA**  
Door rails for double-action and single-action doors



**154 MANET Compact**  
Single-point fitting system, stainless steel



**160 MANET Concept**  
Single-point fitting system, stainless steel



**174 MANET Concept**  
Connection system



**182 MANET Concept**  
Single-point fixing



**188 SG**  
Centre and corner locks for toughened glass assemblies



**212 Wall connection profile**  
Bearing wall connecting profile system



**218 MR 22/MR 28**  
Wall connecting profile system, non-bearing



**224 Accessories**

# The dormakaba range of fittings for toughened glass assemblies

The dormakaba range of fittings for toughened glass assemblies has matured into one of the most comprehensive available today. It offers ideal options for creating all standard toughened glass assemblies in a manner which is technically sound and visually attractive. This gives the designer a wide variety of options for individual expression in creating with toughened glass – either internally or externally.

All dormakaba fittings are based on a modular system, consisting of a base unit, functional inserts and clip-on covers in the widest possible range of finishes. The glass preparations that are needed can be performed quickly and easily. Quality materials and thorough workmanship guarantee a long service life and a reflection of excellence for years to come.

Applications and features	MUNDUS Comfort/Premium		Eckbeschläge UNIVERSAL/Arcos		BEYOND	EA
For external assemblies	●	●	●	●		●
For internal assemblies	●	●	●	●	●	●
For standard toughened glass assembly types	●	●	●	●	●	●
For individually designed assemblies with corner fittings, fin fittings etc.			●			
For double-action doors	●	●	●	●	●	
For single-action doors	●	●	●	●	●	●
Glass thickness (mm) (Generally, glass thickness tolerances within the +/- 0.5 mm range can be accommodated)	8–12	8–22	8, 10, 12 <sup>6)</sup>	8, 10, 12	10, 12	8, 10, 12
Glass thickness (mm), for UNIVERSAL with 15 mm pivot point			8, 10	8, 10		
Max. door weight (kg)	150	200	110 <sup>2)5)</sup>	110 <sup>2)5)</sup>	80	80/110 <sup>4)</sup>
Max. door weight (kg) for UNIVERSAL with 15 mm pivot point			80			
Max. door width (mm)	1,100	1,300	1,100 <sup>2)5)</sup>	1,100 <sup>2)5)</sup>	1,000/1,200 <sup>4)</sup>	1,000/1,100 <sup>4)</sup>
Max. door height (mm)	see Matrix for door dimensions, page 10		3,000 <sup>1)2)5)</sup>	3,000 <sup>1)2)5)</sup>	2,200/ 3,000 <sup>4)5)</sup>	3,000 <sup>1)2)</sup>
Glass type	TSG	TSG/LSG <sup>3)</sup>	TSG	TSG	TSG	TSG
<b>Double-action / single-action door</b>	<b>sa/da</b>	<b>sa/da</b>	<b>sa/da</b>	<b>sa/da</b>	<b>sa/da</b>	<b>sa</b>
<b>Materials and finishes</b>						
Aluminum, mill finish (Aluminum R 600) (100)						
Aluminum, silver EV1 anodized (similar Eloxal I EV1 / Eloxal II C 0) (101)			●			●
Aluminum EV1-Deco anodized (compatible with finish 150)					●	
Aluminum, similar satin stainless steel anodized (113, 107)					● (107)	● (107)
Aluminum, silver anodized (Silver N 600 ST) (compatible with finish 114) (150)	●	●		●		
Aluminum special color anodized (199)		●	●	●		●
Aluminum, traffic white powder coated (300)						●
Aluminum, white powder coated (White P 100 SG) (350, RAL 9016)	●	●	●			
Aluminum, special color powder coated (399)			●	●		●
Brass, polished chromed (501)			●			●
Brass, polished varnished (502)						
Brass, polished (503)			●			●
Satin stainless steel (Niro S 700 ST) (700)			●	●		
Polished stainless steel (Niro S 700 HG) (701)			●	●		
Satin stainless steel (750)	●	●				
Polished stainless steel (751)	●	●				
<b>Page</b>	6		40	80	100	110

Door rails and locks ideally complement the dormakaba product range for toughened glass assemblies. The door rails grant all requests for wide and heavy doors, also for side panels. They guarantee the maximum protection for the lower glass edge.

With its different types and finishes the lock programme SG meets various requirements for function, safety and appearance.

TP/TA	MANET Compact	MANET Concept	SG	Wall connection profile	MR 22/ MR 28
●		○	●	●	
●	●	●	●	●	●
●	●	●	●	●	
○		●			
●	●	●	○	○	
●	○	○	○		
8, 10, 10.76 12, 12.76, 13.5, 15, 17, 19, 21	10, 12	10–15.5	8, 10, 12	8, 10, 12, 12.7, 13.5, 15, 17, 19	6, 8, 10
150*	80	100		45 kg/m	
1,400*	1,200	1,200			
3,500 <sup>1)2)5)</sup> 4,000 <sup>4)</sup>	2,500 <sup>1)2)5)</sup>	3,000 <sup>5)</sup>		3,000 <sup>1)2)5)</sup>	2,500/ 2,800 <sup>1)2)5)</sup>
TSG/LSG <sup>3)</sup>	TSG	TSG/LSG <sup>3)</sup>	TSG	TSG/LSG <sup>3)</sup>	TSG
sa/da	sa/da	sa/da	sa/da		
●				●	
●			●	●	●
			●	●	●
●			●	●	
●			●	●	
●	●	●		●	
●				●	
124	154	160	188	212	218

1) For door heights up to 2,500 mm  
For doors with a height of more than 2,500 mm we have to keep additional conditions/limits:

- Glass thickness >= 10 mm
- Usage of a handle bar with 3 connection points in minimum and a minimum height of 2/3 door height

2) Use of door closers:  
Doors < / = 1,100 mm must be provided with door closers of type EN 3 (with or without back-check), and doors > / = 1,100 mm need to be fitted with larger door closers (e.g. EN 4, 5 or 6) with or without backcheck.

3) Laminated safety glass of 2 x toughened safety glass

4) Max. panel weight depends on product combination

5) Further possible glass panel heights on request at our application engineering

6) Under certain circumstances also 15 + 19 mm glass thicknesses

The glass dimension may differ due to items as follows:

- installation type,
- glass tolerance,
- generally use

○ Optional

● Standard

\*Only for double-action doors with door rail top and bottom, incl. steel door lever

# Content

## MUNDUS

08	<b>General information</b>
09	<b>Technical information</b>
10	<b>Matrix MUNDUS</b>
12	<b>Clamp&amp;Glue technology</b>
14	<b>Type illustration</b>
16	<b>Technical details</b>
18	<b>Components</b>
29	<b>Construction details</b>
30	<b>Accessories MUNDUS</b>
34	<b>Glass preparation</b>
224	<b>Accessories</b>
248	<b>Safety-related information</b>



**MUNDUS**

# MUNDUS – The freedom of versatility

### Compelling benefits:

- Clear design lines, no visible fixings
- Wide range of surface finishes, colours and materials
- Particularly easy to install: Many MUNDUS fittings can be mounted on the glass and fixed into place in their as-delivered condition
- Fast installation, simple in-situ adjustment of the installed system
- set up for the right glass thickness: adaptable to different glass thicknesses without the need to change gaskets
- Improved load-bearing performance and more secure hold thanks to high-strength materials (screws and threaded sleeves of high-grade stainless steel capable of absorbing high clamping forces)
- Use of laminated safety glass (LSG) using dormakaba's proven Clamp&Glue technology for high quality and safety demands (MUNDUS Premium)

### Elegant appearance

MUNDUS fittings impress through their elegant design combining sharply defined, straight edges and rounded corners, high-quality materials and careful workmanship. There are no fixings to disrupt the smooth harmony of the surface finish. For a durable, elegant appearance, the cap consists of 2 mm thick and therefore particularly robust material – stainless steel or aluminum.

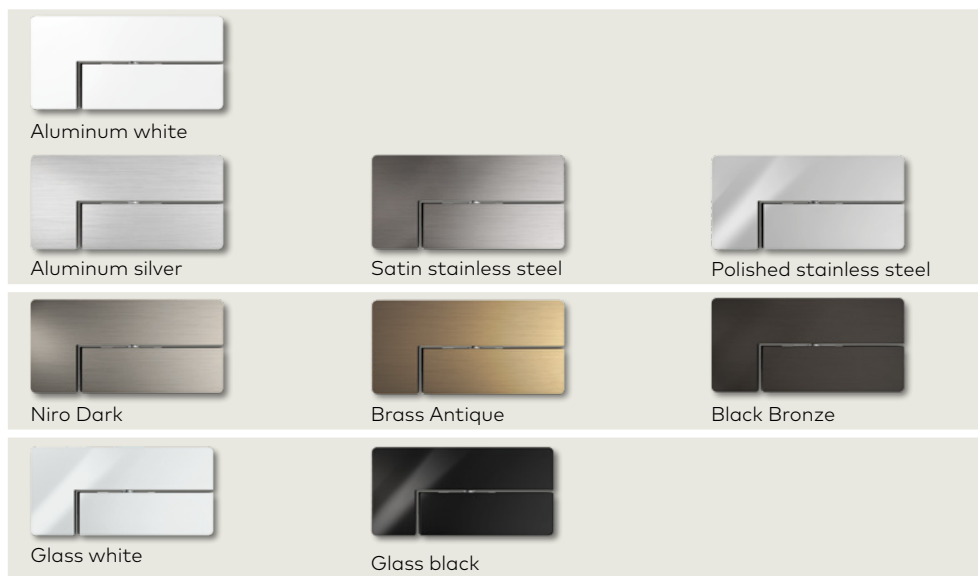
### MUNDUS offers patch fittings for 24 standard systems and numerous special solutions

– whether for an open-plan residential ambience, attractive office or prestigious shop entrance. Visually and technically impressive, MUNDUS glass fittings are suitable for a wide range of different requirements. The extensive portfolio encompasses connection fittings for the usual 24 standard systems such as PT 10, PT 40 or PT 70. It also accommodates special solutions for custom spatial requirements, such as PT 41 and PT 61 for glass assemblies stiffened with 90° glass fins.

### Quick and easy to install

MUNDUS fittings offer multi-dimensional in-situ adjustability, ensuring a firm fit every time. They facilitate infinite variability of the vertical gap dimensions and thus consistently correct setting of the pivot axis and zero position.

### Wide choice of finishes




**Standard collection**  
dormakaba standard finishes, anodized or coated, satin or polished stainless steel.

**Exclusive collection**  
Treated metals such as anodized aluminum.

**Glass collection**  
Glass finishes enable the fittings to visually merge with glass doors, creating a completely new effect.



# MUNDUS – the technical specifications at a glance

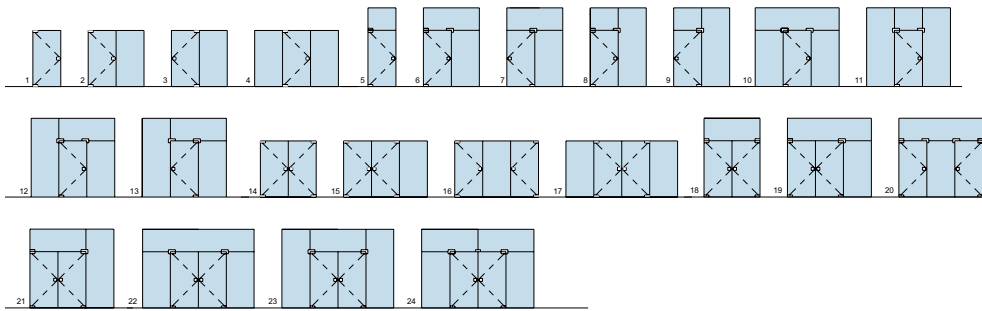

MUNDUS	MUNDUS Premium	MUNDUS Comfort
Max. load-bearing capacity	200 kg	150 kg
Max. panel width	1,300 mm	1,100 mm
	The max. panel width depends on glass thickness and weight. For more information please see on the following page MUNDUS - Matrix for door dimensions.	
Possible glass thickness	8–12 mm 12–15 mm 15–19 mm 19–22 mm	8–12 mm
Suitable for LSG*	●	–
Supported pivot points in mm	55, 65, 70 mm	55, 65, 70 mm
Offset adjustability in mm	Infinite ( $\pm 3$ mm); 52–73 mm	Infinite ( $\pm 3$ mm); 52–73 mm
Adjustability of the door/insert	Multi-dimensional	Multi-dimensional
Cover materials	Stainless steel, aluminum, glass etc.	Stainless steel, aluminum
Test cycles:	1,000,000	500,000
Inhouse-Test according to EN 12400	Test certificates from an external accredited authority can be provided on request.	
Inhouse-Test according to EN 1670		

Materials and finishes	Availability	Corrosion class	Availability	Corrosion class
<b>Standard collection</b>				
Aluminum, white powder coated (White P 100 SG) (350, RAL 9016)	●	4	●	4
Aluminum, silver anodized (Silver N 600 ST) (compatible with finish 114) (150)	●	4	●	4
Satin stainless steel (Niro S 700 ST) (for MUNDUS) (750)	●	4	●	4
Polished stainless steel (Niro S 700 HG) (for MUNDUS) (751)	●	4	●	4
Special colour at option, powder coated (399)	●	4	●	4
<b>Exclusiv collection (Special colour anodized, 199)</b>				
Niro Dark (157)	●	4	–	
Brass Antique	●	4	–	
Black Bronze	●	4	–	
<b>Glass collection</b>				
Glass white	●	4	–	
Glass black	●	4	–	

1 – 4 Corrosion class according to EN 1670 (independent test confirmation on request) • Standard – not available

\* LSG out of 2 x TSG (= 2 panes each with a minimum glass thickness of 5 mm). Can be implemented with separately ordered gaskets and deploying dormakaba's proven Clamp&Glue technology.

# MUNDUS – Matrix for door dimensions

height (mm)	8 mm glass width (mm)				10–12 mm glass width (mm)				12–15 mm glass width (mm)				15–19 mm glass width (mm)				19–22 mm glass width (mm)			
	1,000	1,100	1,200	1,300	1,000	1,100	1,200	1,300	1,000	1,100	1,200	1,300	1,000	1,100	1,200	1,300	1,000	1,100	1,200	1,300
2,000	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
2,100	Blue	Blue	Blue	Blue	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
2,200	Blue	Blue	Blue	Blue	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
2,300	Blue	Blue	Blue	Blue	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
2,400	Blue	Blue	Blue	Blue	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
2,500	Blue	Blue	Blue	Blue	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
2,600	Orange	Orange	Orange	Orange	Blue	Blue	Blue	Blue	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
2,700	Orange	Orange	Orange	Orange	Blue	Blue	Blue	Blue	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
2,800	Orange	Orange	Orange	Orange	Blue	Blue	Blue	Blue	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
2,900	Orange	Orange	Orange	Orange	Blue	Blue	Blue	Blue	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
3,000	Orange	Orange	Orange	Orange	Blue	Blue	Blue	Blue	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
3,100	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
3,200	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
3,300	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
3,400	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
3,500	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
3,600	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
3,700	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
3,800	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
3,900	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow
4,000	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow	Yellow

- Suitable for use without any technical limitations.
- Pull handle necessary extending over 2/3 of the door height with at least 3 fixing points. Glass and fitting must be adhesive-bonded.
- Use of MUNDUS fittings is not recommended. Please contact your dormakaba partner in order to discuss possible alternatives.
- This door dimension is unfortunately not possible with MUNDUS.



# Extensive suitability, effortless installation





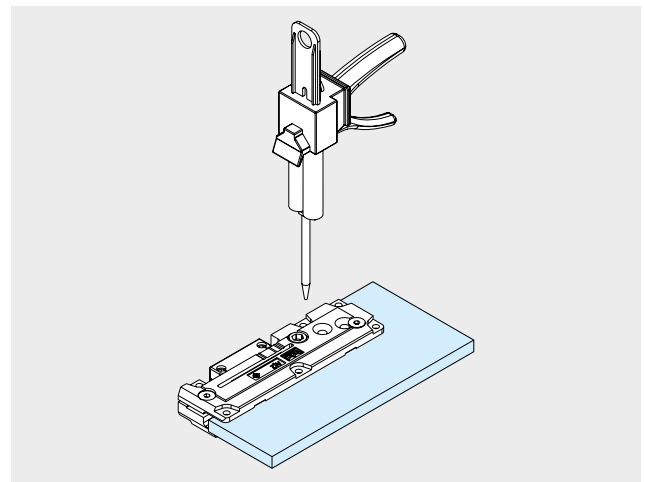
### **MUNDUS Premium – Providing a totally reliable hold – Clamp&Glue technology**

#### **Providing a totally reliable hold – Clamp&Glue technology**

Proven dormakaba technology for the installation of laminated safety glass. An additional adhesive bond ensures a firm hold and permanent cohesion between fitting and glass.

#### **The bonding process following the fixing of the fitting is remarkably easy:**

- Before commencing with the gluing operation, you will need to replace the standard gaskets with special gaskets suitable for laminated safety glass\*
- The glue is fed through the holes provided until it emerges from the overflow openings in the clamp fittings
- The process is then repeated on the rear face
- Allow the glue to harden.





\*The LSG gaskets may only be used when fixing glass using the Clamp&Glue technology

#### **MUNDUS and laminated safety glass (LSG) – a combination that offers impressive advantages:**

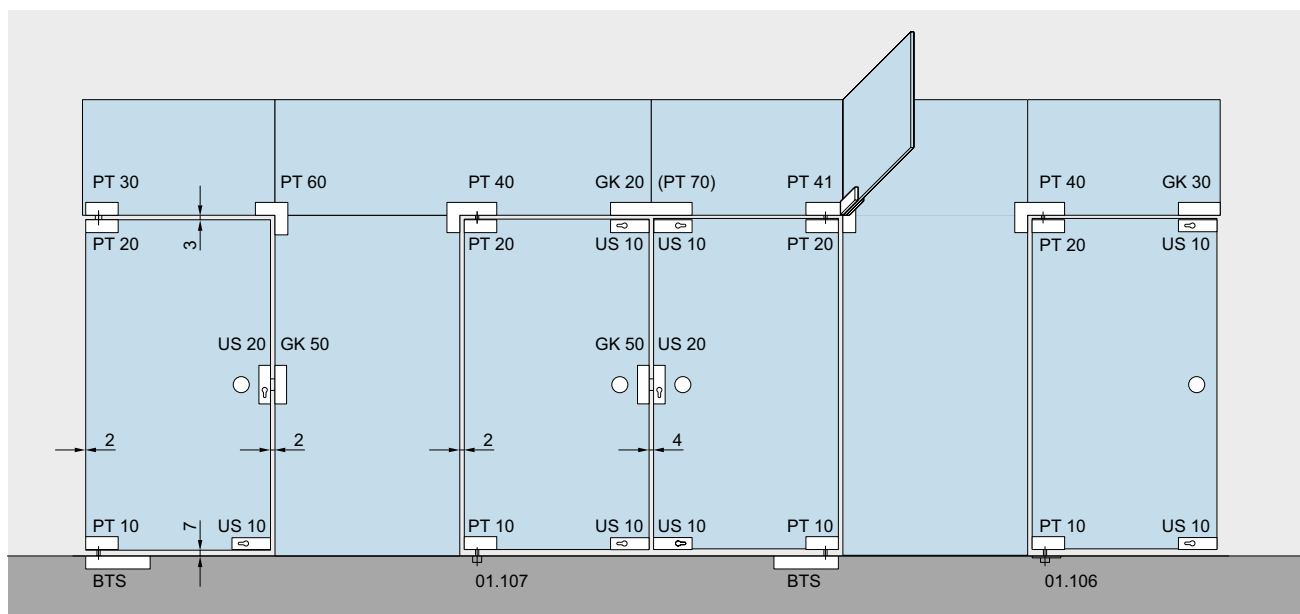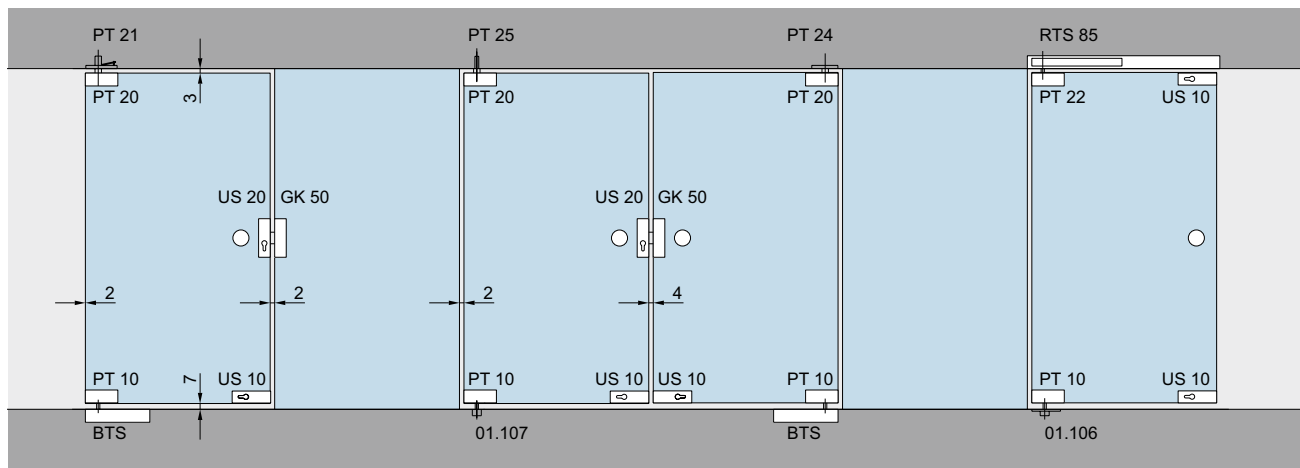- High safety for users, even in the case of large glass assemblies
- Improved acoustic insulation and reduced noise levels achievable by integrating a sound deadening film
- Deploying glass doors as a design element – specially designed films for individual aesthetics
- Use of LSG comprising 2 x TSG (= 2 panes each with a minimum glass thickness of 5 mm).

# Type illustration

**Toughened glass assemblies with fittings (55/65/70 mm pivot point) and locks.**



BTS = Floor spring  
 GK = Strike box  
 PT = Patch  
 RTS = Transom closer  
 US = Lock

### Maximum door weight and width for MUNDUS fittings

Max. door weight:  
 MUNDUS Premium: 200 kg  
 MUNDUS Comfort: 150 kg

Max. door width:  
 MUNDUS Premium: 1,300 mm  
 MUNDUS Comfort: 1,100 mm

For doors with a height of more than 2,500 mm we should keep additional conditions/limits:

- Glass thickness  $\geq 10$  mm
- Usage of a handle bar with 3 connection points in minimum and a minimum height of 2/3 door height

The max. panel width depends on glass thickness and weight. For more information please see on page 10, MUNDUS - Matrix for door dimensions.

**Use of door closers:**

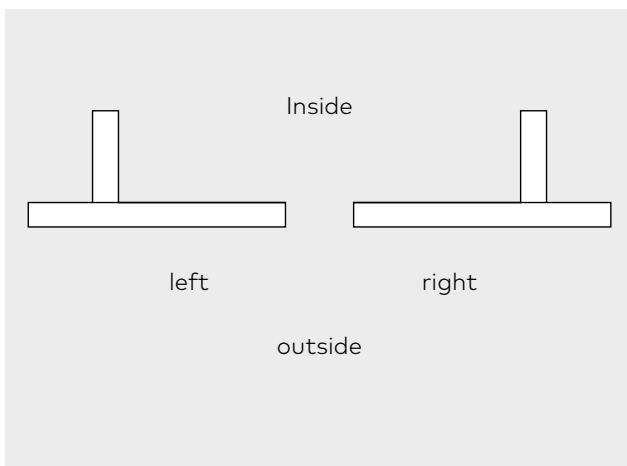
Doors  $\leq 1,100$  mm must be provided with door closers of type EN 3 (with or without backcheck), and doors  $> 1,100$  mm need to be fitted with larger door closers (e.g. EN 4, 5 or 6) with or without backcheck.

**Glass panels**

The individual glass panels may show production tolerances in geometry and dimensions that sum up to larger deviations in larger glass assemblies. These deviations are not shown in the exemplary constructional set up above.

**Note for stiffening elements:**

"Left" or "Right" is always determined from the outside and as viewed from above.




# Easy to install, easy to adjust

## Fast and uncomplicated fixing


MUNDUS patch fittings always fit snugly on the glass thanks to their multi-dimensional variability. They facilitate infinite adjustment of the vertical gap dimensions and location accuracy in terms of both pivot point and zero position.

## Optimum gap dimensions

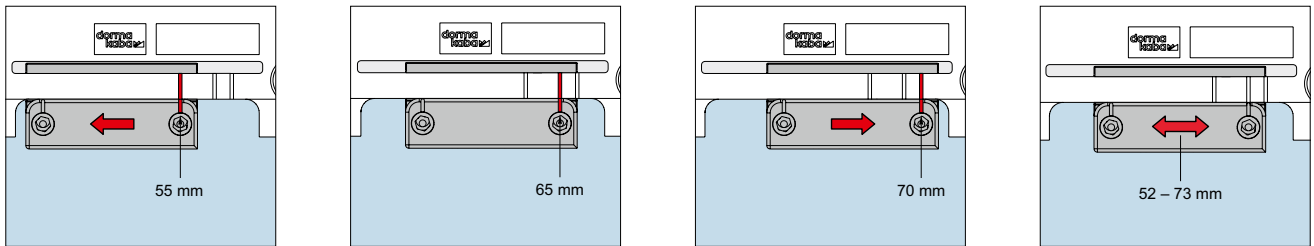Thanks to the infinitely variable, multi-dimensional adjustability of the patch fittings, the door can be optimally aligned following installation.




## Multi-dimensional adjustability even when mounted

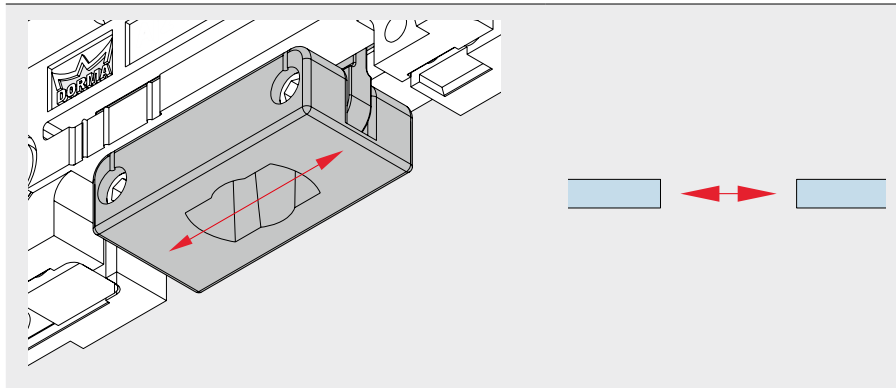


### Alignment in the X axis

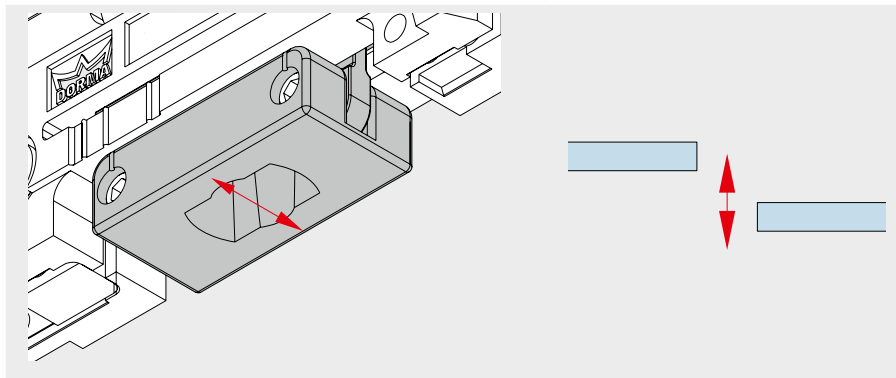Individual adjustment of the pivot point, infinitely variable between 52 and 73 mm.



### Alignment in the Z axis

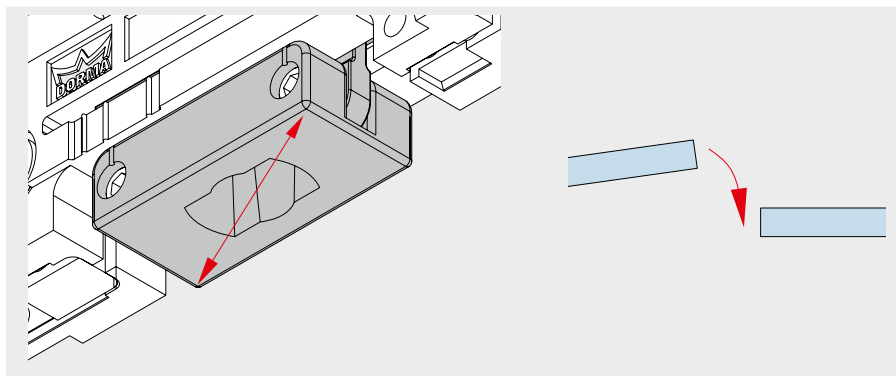Infinite variability of the door position to achieve flush alignment thanks to adjustment of up to 1 mm for a glass thickness of 8 mm, or 3 mm for a glass thickness of 12 mm.



### Zero position adjustment

Infinite alignment variability of the door to achieve the correct zero position by adjustment around the axis of rotation in the range +/- 1.5°.



## Easy to install, safe and secure

With MUNDUS, you do not require new or additional gaskets in order to adjust the fittings to the glass thickness. With MUNDUS, the glass thickness is defined by two screws in the base unit of the patch fitting, allowing the use of glazing ranging from 8 to 22 mm.



### Suitable for different glass thicknesses

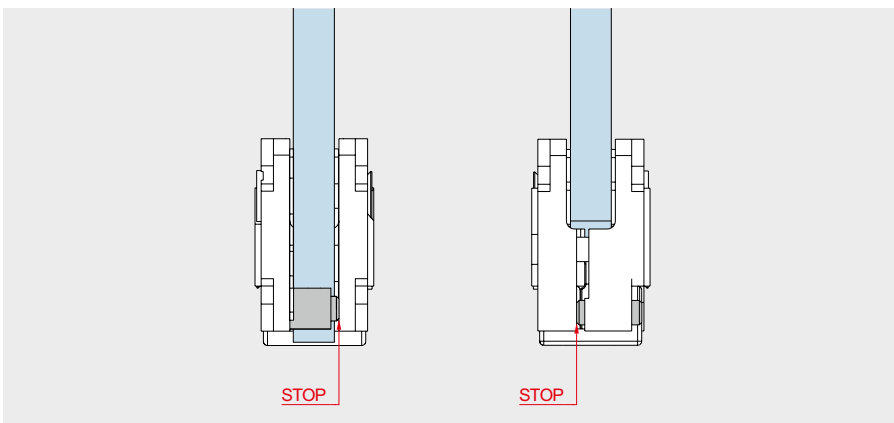
**MUNDUS Premium:**  
Accommodating glass thicknesses of 8–12 mm, 12–15 mm, 15–19 mm and 19–22 mm with infinite adjustability in a single fitting. The gaskets that you had to separately order for toughened safety glass are now a thing of the past. You always have the right fitting to hand. That means: fast installation, more time, more design content.

Glass thickness:	8–12 mm
	12–15 mm
	15–19 mm
	19–22 mm
Max. Door weights:	200 kg

<b>MUNDUS Comfort:</b>	
Glass thickness:	8–12 mm
Max. Door weights:	150 kg





### Protection from unauthorised access





The positioning of the clamping screws also provides for additional protection against unauthorised access to your interiors. The screws are distributed on both sides of the base unit so that disassembly from one side is not possible.








# Patch fittings

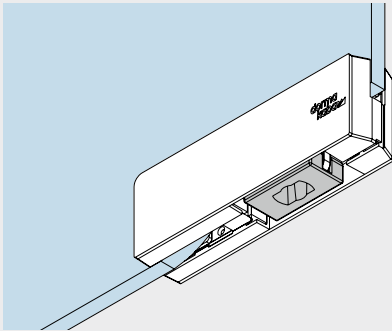
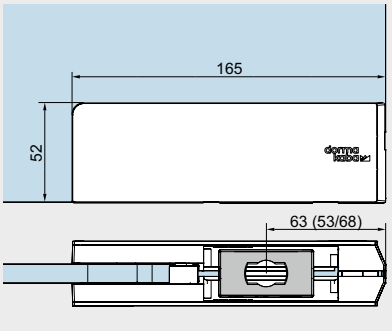
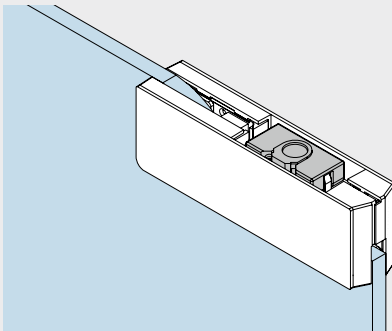
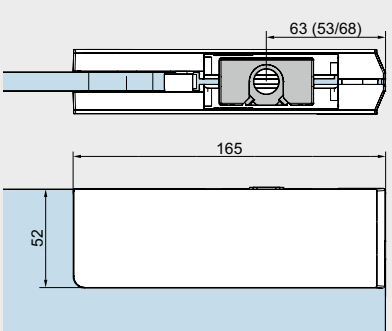
Shown with 10 mm glass. When used with other glass thicknesses, the measurements change accordingly.




	Product description	Glass thickness	Art. No.
	<p><b>PT 10 Premium bottom patch fitting</b>                      use for flat-conical floor spring spindle or round pivot Ø 14 mm.                      For glass weight up to 200 kg and use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required</p>	8–12 mm	<b>42.100</b>
		12–15 mm	<b>42.101</b>
		15–19 mm	<b>42.102</b>
		19–22 mm	<b>42.103</b>
	<p><b>PT 10 Comfort bottom patch fitting</b>                      use for flat-conical floor spring spindle or round pivot Ø 14 mm.                      For glass weight up to 150 kg and use with toughened safety glass (TSG).</p>	8–12 mm	<b>38.100</b>
	<p><b>PT 20 Premium top patch fitting</b>                      with plastic socket for pivot Ø 14 mm.                      For glass weight up to 200 kg and use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p>	8–12 mm	<b>42.200</b>
		12–15 mm	<b>42.201</b>
		15–19 mm	<b>42.202</b>
		19–22 mm	<b>42.203</b>
	<p><b>PT 20 Comfort top patch fitting</b>                      with plastic socket for pivot Ø 14 mm.                      For glass weight up to 150 kg and use with toughened safety glass (TSG).</p>	8–12 mm	<b>38.200</b>

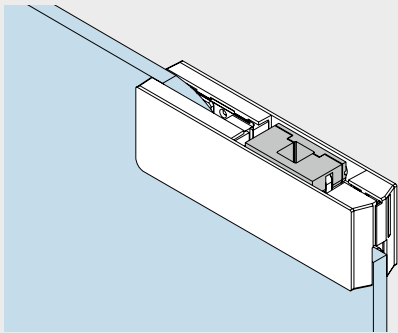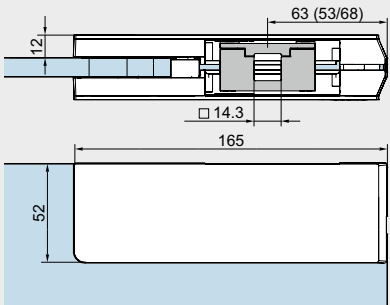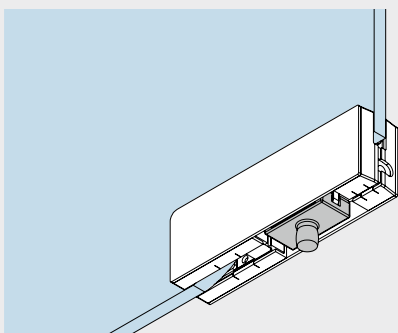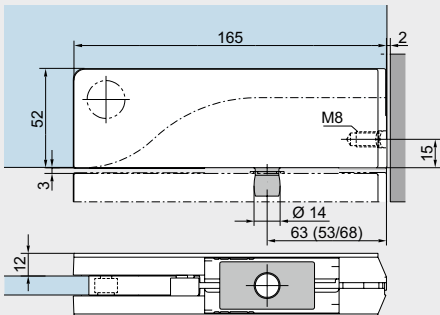	Product description	Glass thickness	Art. No.
	<p><b>PT 22 Premium*</b>  <b>top patch fitting</b>                      for a glass weight up to 80 kg                      with insert for transom closer DORMA RTS.                      For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p>	<p>8–12 mm                      12–15 mm                      15–19 mm                      19–22 mm</p>	<p><b>42.220</b>  <b>42.221</b>  <b>42.222</b>  <b>42.223</b></p>
	<p><b>PT 22 Comfort*</b>  <b>top patch fitting</b>                      with insert for transom closer DORMA RTS.                      For use with toughened safety glass (TSG).</p>	<p>8–12 mm</p>	<p><b>38.220</b></p>
	<p><b>PT 30 Premium</b>  <b>overpanel patch fitting</b>                      with pivot Ø 14 mm and M 8 tapped hole at side.                      For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p>	<p>8–12 mm                      12–15 mm                      15–19 mm                      19–22 mm</p>	<p><b>42.300</b>  <b>42.301</b>  <b>42.302</b>  <b>42.310</b></p>
	<p><b>PT 30 Comfort</b>  <b>overpanel patch fitting</b>                      with pivot Ø 14 mm and M 8 tapped hole at side.                      for use with toughened safety glass (TSG).</p>	<p>8–12 mm</p>	<p><b>38.300</b></p>

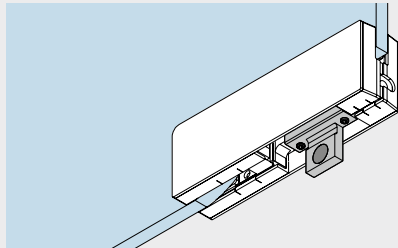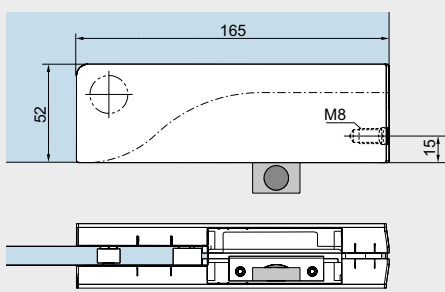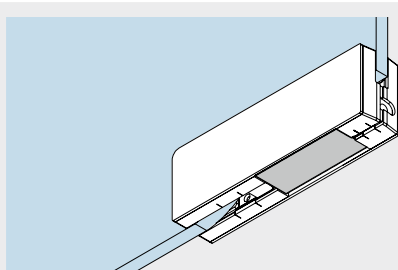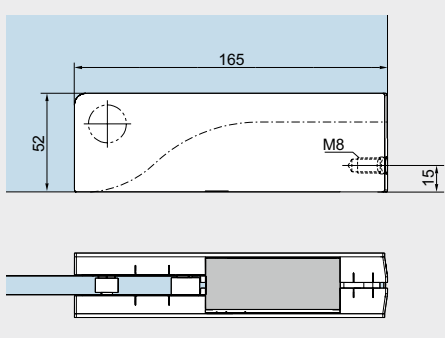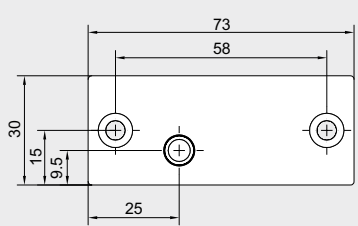\* The maximum permissible door heights and door widths depend on the closing device used and its spring strength / closing force. The maximum allowable door weight in combination with an RTS transom-concealed door closer is 110 kg, the maximum allowable panel width is 1,100 mm.




	Product description	Glass thickness	Art. No.
	<p><b>PT 30 Premium overpanel patch fitting</b> with stop insert. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p>	<p>8–15 mm 15–19 mm 19–22 mm</p>	<p><b>42.303</b> <b>42.305</b> <b>42.311</b></p>
	<p><b>PT 30 Comfort overpanel patch</b> with stop insert. For use with toughened safety glass (TSG).</p>	<p>8–15 mm</p>	<p><b>38.303</b></p>
	<p><b>PT 30 Premium overpanel patch fitting</b> with blanking insert. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p>	<p>8–15 mm 15–19 mm 19–22 mm</p>	<p><b>42.306</b> <b>42.308</b> <b>42.312</b></p>
	<p><b>PT 30 Comfort overpanel patch</b> with blanking insert. For use with toughened safety glass (TSG).</p>	<p>8–15 mm</p>	<p><b>38.306</b></p>
	<p><b>Fixing plate</b> for MUNDUS overpanel patch fitting PT 30 and MUNDUS overpanel strike box GK 30 Weight in kg: 0.039</p> <p>Only available in satinized stainless steel, polished stainless steel or powder-coated stainless steel. Optionally wall anchor and threaded rod are applicable. (see page 31.)</p>		<p><b>38.313</b></p>

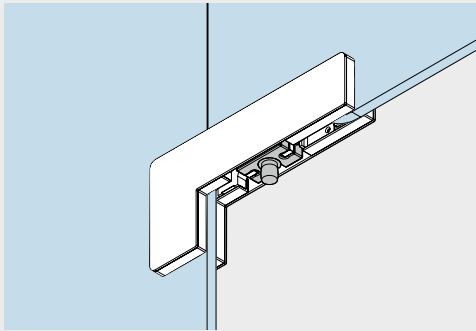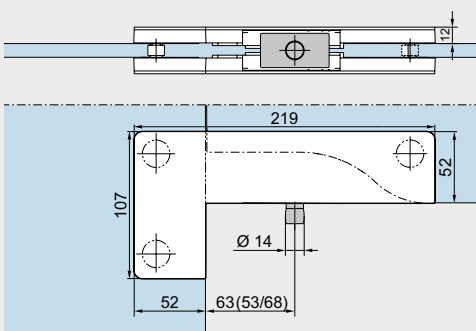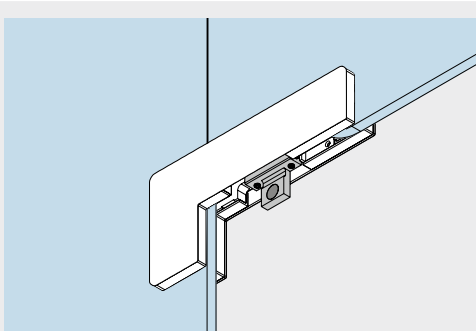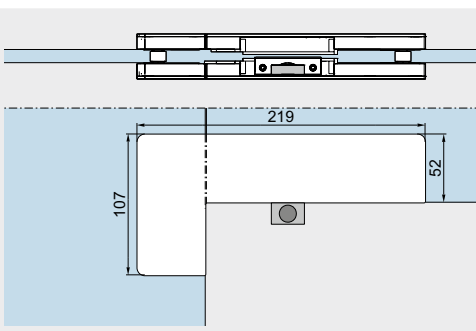	Product description	Glass thickness	Art. No.
	<p><b>PT 40 Premium patch for overpanel and sidelight</b> with pivot Ø 14 mm. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p> <p><b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.</p>	<p>8–12 mm 12–15 mm 15–19 mm 19–22 mm</p>	<p><b>42.400</b> <b>42.401</b> <b>42.402</b> <b>42.470</b></p>
	<p><b>PT 40 Comfort patch for overpanel and sidelight</b> with pivot Ø 14 mm. For use with toughened safety glass (TSG).</p> <p><b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.</p>	<p>8–12 mm</p>	<p><b>38.400</b></p>
	<p><b>PT 40 Premium patch for overpanel and sidelight</b> with stop insert. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p> <p><b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.</p>	<p>8–15 mm 15–19 mm 19–22 mm</p>	<p><b>42.403</b> <b>42.405</b> <b>42.471</b></p>
	<p><b>PT 40 Comfort patch for overpanel and sidelight</b> with stop insert. For use with toughened safety glass (TSG).</p> <p><b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.</p>	<p>8–15 mm</p>	<p><b>38.403</b></p>

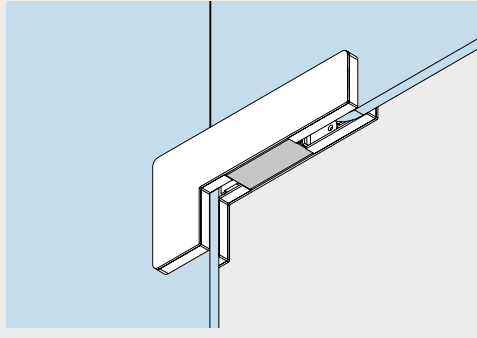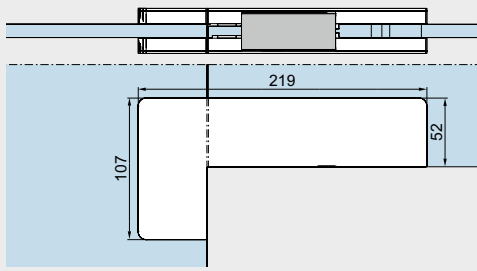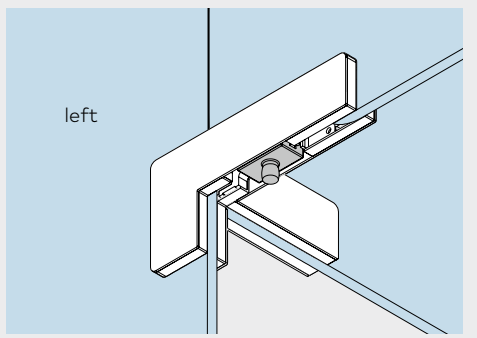	Product description	Glass thickness	Art. No.																																
	<p><b>PT 40 Premium patch for overpanel and sidelight</b> with blanking insert. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p> <p><b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.</p>	<p>8–15 mm <b>42.406</b> 15–19 mm <b>42.408</b> 19–22 mm <b>42.409</b></p>																																	
	<p><b>PT 40 Comfort patch for overpanel and sidelight</b> with blanking insert. For use with toughened safety glass (TSG).</p> <p><b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.</p>	<p>8–15 mm <b>38.406</b></p>																																	
	<p><b>PT 41 Premium patch for overpanel and sidelight</b> with pivot pin Ø 14 mm and fin fitting*. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p>	<table border="0"> <tr> <td data-bbox="1189 1220 1220 1265">left</td> <td data-bbox="1189 1265 1364 1310">8–12 mm <b>42.410</b></td> </tr> <tr> <td></td> <td data-bbox="1189 1310 1364 1355">12–15 mm <b>42.411</b></td> </tr> <tr> <td></td> <td data-bbox="1189 1355 1364 1400">15–19 mm <b>42.412</b></td> </tr> <tr> <td></td> <td data-bbox="1189 1400 1364 1444">19–22 mm <b>42.472</b></td> </tr> <tr> <td data-bbox="1189 1444 1220 1489">right</td> <td data-bbox="1189 1489 1364 1534">8–12 mm <b>42.420</b></td> </tr> <tr> <td></td> <td data-bbox="1189 1534 1364 1579">12–15 mm <b>42.421</b></td> </tr> <tr> <td></td> <td data-bbox="1189 1579 1364 1624">15–19 mm <b>42.422</b></td> </tr> <tr> <td></td> <td data-bbox="1189 1624 1364 1668">19–22 mm <b>42.474</b></td> </tr> </table>	left	8–12 mm <b>42.410</b>		12–15 mm <b>42.411</b>		15–19 mm <b>42.412</b>		19–22 mm <b>42.472</b>	right	8–12 mm <b>42.420</b>		12–15 mm <b>42.421</b>		15–19 mm <b>42.422</b>		19–22 mm <b>42.474</b>																	
left	8–12 mm <b>42.410</b>																																		
	12–15 mm <b>42.411</b>																																		
	15–19 mm <b>42.412</b>																																		
	19–22 mm <b>42.472</b>																																		
right	8–12 mm <b>42.420</b>																																		
	12–15 mm <b>42.421</b>																																		
	15–19 mm <b>42.422</b>																																		
	19–22 mm <b>42.474</b>																																		
	<table border="0"> <tr> <td data-bbox="683 1601 901 1713"></td> <td data-bbox="901 1601 1189 1713"> <table border="0"> <tr> <td data-bbox="901 1601 965 1646"><b>with stop insert</b></td> <td data-bbox="965 1601 1189 1646">left 8–15 mm <b>42.413</b></td> </tr> <tr> <td></td> <td data-bbox="965 1646 1189 1691">15–19 mm <b>42.415</b></td> </tr> <tr> <td></td> <td data-bbox="965 1691 1189 1736">19–22 mm <b>42.473</b></td> </tr> <tr> <td></td> <td data-bbox="965 1736 1189 1780"><hr/></td> </tr> <tr> <td></td> <td data-bbox="965 1780 1189 1825">right 8–15 mm <b>42.423</b></td> </tr> <tr> <td></td> <td data-bbox="965 1825 1189 1870">15–19 mm <b>42.425</b></td> </tr> <tr> <td></td> <td data-bbox="965 1870 1189 1915">19–22 mm <b>42.475</b></td> </tr> <tr> <td></td> <td data-bbox="965 1915 1189 1960"><hr/></td> </tr> <tr> <td data-bbox="683 1713 901 1825"><b>with blanking insert</b></td> <td data-bbox="901 1713 1189 1825">left 8–15 mm <b>42.416</b></td> </tr> <tr> <td></td> <td data-bbox="901 1825 1189 1870">15–19 mm <b>42.418</b></td> </tr> <tr> <td></td> <td data-bbox="901 1870 1189 1915">19–22 mm <b>42.419</b></td> </tr> <tr> <td></td> <td data-bbox="901 1915 1189 1960"><hr/></td> </tr> <tr> <td></td> <td data-bbox="901 1960 1189 2004">right 8–15 mm <b>42.426</b></td> </tr> <tr> <td></td> <td data-bbox="901 2004 1189 2049">15–19 mm <b>42.428</b></td> </tr> <tr> <td></td> <td data-bbox="901 2049 1189 2094">19–22 mm <b>42.429</b></td> </tr> </table> </td> <td data-bbox="1189 1601 1364 1892"></td> <td data-bbox="1364 1601 1457 1892"></td> </tr> </table>		<table border="0"> <tr> <td data-bbox="901 1601 965 1646"><b>with stop insert</b></td> <td data-bbox="965 1601 1189 1646">left 8–15 mm <b>42.413</b></td> </tr> <tr> <td></td> <td data-bbox="965 1646 1189 1691">15–19 mm <b>42.415</b></td> </tr> <tr> <td></td> <td data-bbox="965 1691 1189 1736">19–22 mm <b>42.473</b></td> </tr> <tr> <td></td> <td data-bbox="965 1736 1189 1780"><hr/></td> </tr> <tr> <td></td> <td data-bbox="965 1780 1189 1825">right 8–15 mm <b>42.423</b></td> </tr> <tr> <td></td> <td data-bbox="965 1825 1189 1870">15–19 mm <b>42.425</b></td> </tr> <tr> <td></td> <td data-bbox="965 1870 1189 1915">19–22 mm <b>42.475</b></td> </tr> <tr> <td></td> <td data-bbox="965 1915 1189 1960"><hr/></td> </tr> <tr> <td data-bbox="683 1713 901 1825"><b>with blanking insert</b></td> <td data-bbox="901 1713 1189 1825">left 8–15 mm <b>42.416</b></td> </tr> <tr> <td></td> <td data-bbox="901 1825 1189 1870">15–19 mm <b>42.418</b></td> </tr> <tr> <td></td> <td data-bbox="901 1870 1189 1915">19–22 mm <b>42.419</b></td> </tr> <tr> <td></td> <td data-bbox="901 1915 1189 1960"><hr/></td> </tr> <tr> <td></td> <td data-bbox="901 1960 1189 2004">right 8–15 mm <b>42.426</b></td> </tr> <tr> <td></td> <td data-bbox="901 2004 1189 2049">15–19 mm <b>42.428</b></td> </tr> <tr> <td></td> <td data-bbox="901 2049 1189 2094">19–22 mm <b>42.429</b></td> </tr> </table>	<b>with stop insert</b>	left 8–15 mm <b>42.413</b>		15–19 mm <b>42.415</b>		19–22 mm <b>42.473</b>		<hr/>		right 8–15 mm <b>42.423</b>		15–19 mm <b>42.425</b>		19–22 mm <b>42.475</b>		<hr/>	<b>with blanking insert</b>	left 8–15 mm <b>42.416</b>		15–19 mm <b>42.418</b>		19–22 mm <b>42.419</b>		<hr/>		right 8–15 mm <b>42.426</b>		15–19 mm <b>42.428</b>		19–22 mm <b>42.429</b>		
	<table border="0"> <tr> <td data-bbox="901 1601 965 1646"><b>with stop insert</b></td> <td data-bbox="965 1601 1189 1646">left 8–15 mm <b>42.413</b></td> </tr> <tr> <td></td> <td data-bbox="965 1646 1189 1691">15–19 mm <b>42.415</b></td> </tr> <tr> <td></td> <td data-bbox="965 1691 1189 1736">19–22 mm <b>42.473</b></td> </tr> <tr> <td></td> <td data-bbox="965 1736 1189 1780"><hr/></td> </tr> <tr> <td></td> <td data-bbox="965 1780 1189 1825">right 8–15 mm <b>42.423</b></td> </tr> <tr> <td></td> <td data-bbox="965 1825 1189 1870">15–19 mm <b>42.425</b></td> </tr> <tr> <td></td> <td data-bbox="965 1870 1189 1915">19–22 mm <b>42.475</b></td> </tr> <tr> <td></td> <td data-bbox="965 1915 1189 1960"><hr/></td> </tr> <tr> <td data-bbox="683 1713 901 1825"><b>with blanking insert</b></td> <td data-bbox="901 1713 1189 1825">left 8–15 mm <b>42.416</b></td> </tr> <tr> <td></td> <td data-bbox="901 1825 1189 1870">15–19 mm <b>42.418</b></td> </tr> <tr> <td></td> <td data-bbox="901 1870 1189 1915">19–22 mm <b>42.419</b></td> </tr> <tr> <td></td> <td data-bbox="901 1915 1189 1960"><hr/></td> </tr> <tr> <td></td> <td data-bbox="901 1960 1189 2004">right 8–15 mm <b>42.426</b></td> </tr> <tr> <td></td> <td data-bbox="901 2004 1189 2049">15–19 mm <b>42.428</b></td> </tr> <tr> <td></td> <td data-bbox="901 2049 1189 2094">19–22 mm <b>42.429</b></td> </tr> </table>	<b>with stop insert</b>	left 8–15 mm <b>42.413</b>		15–19 mm <b>42.415</b>		19–22 mm <b>42.473</b>		<hr/>		right 8–15 mm <b>42.423</b>		15–19 mm <b>42.425</b>		19–22 mm <b>42.475</b>		<hr/>	<b>with blanking insert</b>	left 8–15 mm <b>42.416</b>		15–19 mm <b>42.418</b>		19–22 mm <b>42.419</b>		<hr/>		right 8–15 mm <b>42.426</b>		15–19 mm <b>42.428</b>		19–22 mm <b>42.429</b>				
<b>with stop insert</b>	left 8–15 mm <b>42.413</b>																																		
	15–19 mm <b>42.415</b>																																		
	19–22 mm <b>42.473</b>																																		
	<hr/>																																		
	right 8–15 mm <b>42.423</b>																																		
	15–19 mm <b>42.425</b>																																		
	19–22 mm <b>42.475</b>																																		
	<hr/>																																		
<b>with blanking insert</b>	left 8–15 mm <b>42.416</b>																																		
	15–19 mm <b>42.418</b>																																		
	19–22 mm <b>42.419</b>																																		
	<hr/>																																		
	right 8–15 mm <b>42.426</b>																																		
	15–19 mm <b>42.428</b>																																		
	19–22 mm <b>42.429</b>																																		





**Please note:**  
The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.

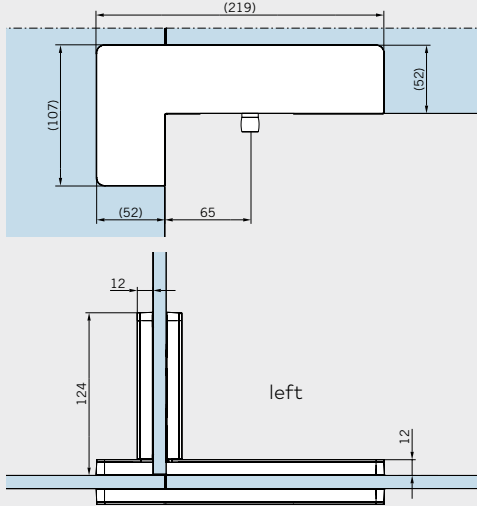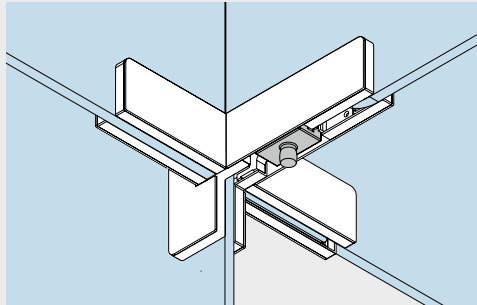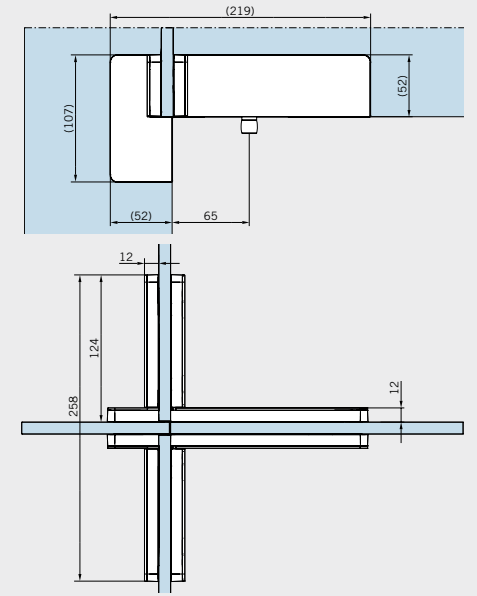\* Left hand fin (illustration shows left hand) / right hand fin. Left or right hand are determined by view from outside.

	Product description			Glass thickness	Art. No.
	<b>PT 41 Comfort patch for overpanel and sidelight</b>	<b>with pivot pin</b>	left right	8–12 mm 8–12 mm	<b>38.410</b> <b>38.420</b>
	with pivot pin Ø 14 mm and fin fitting*. For use with toughened safety glass (TSG).	<b>with stop insert</b>	left right	8–15 mm 8–15 mm	<b>38.413</b> <b>38.423</b>
		<b>with blanking insert</b>	left right	8–15 mm 8–15 mm	<b>38.416</b> <b>38.426</b>
	<b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.				
	<b>PT 41 Premium patch for overpanel and sidelight</b>	<b>with pivot pin</b>		8–12 mm 12–15 mm 15–19 mm 19–22 mm	<b>42.430</b> <b>42.431</b> <b>42.432</b> <b>42.476</b>
	with pivot pin Ø 14 mm and fin fitting. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.	<b>with stop insert</b>		8–15 mm 15–19 mm 19–22 mm	<b>42.433</b> <b>42.435</b> <b>42.477</b>
		<b>with blanking insert</b>		8–15 mm 15–19 mm 19–22 mm	<b>42.436</b> <b>42.438</b> <b>42.439</b>
	<b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.				
	<b>PT 41 Comfort patch for overpanel and sidelight</b>	<b>with pivot pin</b>		8–15 mm	<b>38.430</b>
	with pivot pin Ø 14 mm and fin fitting. For use with toughened safety glass (TSG).	<b>with stop insert</b>		8–15 mm	<b>38.433</b>
		<b>with blanking insert</b>		8–15 mm	<b>38.436</b>
	<b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.				





# Connector patches

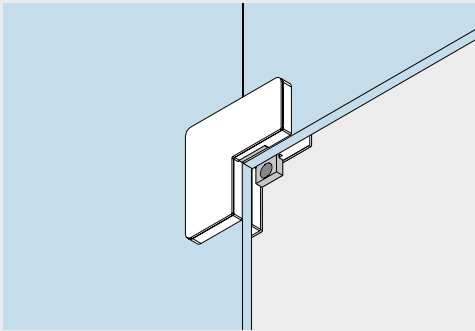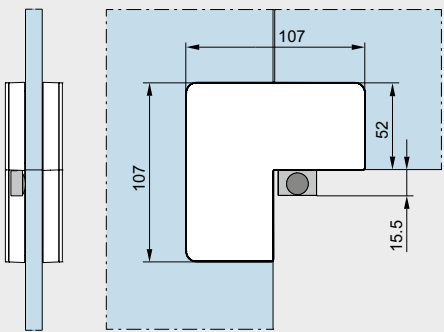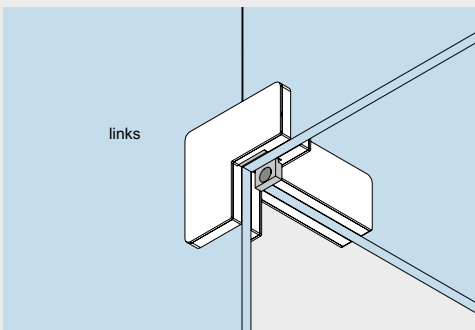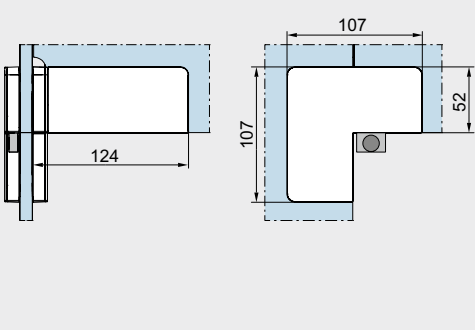Shown with 10 mm glass. When used with other glass thicknesses, the measurements change accordingly.

	Product description	Glass thickness	Art. No.
	<p><b>PT 60 Premium connector</b> for double and single-action doors with 1 stop insert and 2 blanking inserts. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p> <p><b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.</p>	8–15 mm	<b>42.600</b>
		15–19 mm	<b>42.602</b>
	19–22 mm	<b>42.603</b>	
	<p><b>PT 60 Comfort connector</b> for double and single-action doors with 1 stop insert and 2 blanking inserts. For use with toughened safety glass (TSG).</p> <p><b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.</p>	8–15 mm	<b>38.600</b>
	<p><b>PT 61 Premium connector</b> for double and single-action doors with fin fitting*, with 1 stop insert and 2 blanking inserts. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p> <p><b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.</p>	left 8–15 mm	<b>42.610</b>
		right 8–15 mm	<b>42.613</b>
		left 15–19 mm	<b>42.612</b>
		right 15–19 mm	<b>42.615</b>
		left 19–22 mm	<b>42.604</b>
		right 19–22 mm	<b>42.605</b>
	<p><b>PT 61 Comfort connector</b> for double and single-action doors with fin fitting*, with 1 stop insert and 2 blanking inserts. For use with toughened safety glass (TSG).</p> <p><b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.</p>	left 8–15 mm	<b>38.610</b>
		right 8–15 mm	<b>38.613</b>

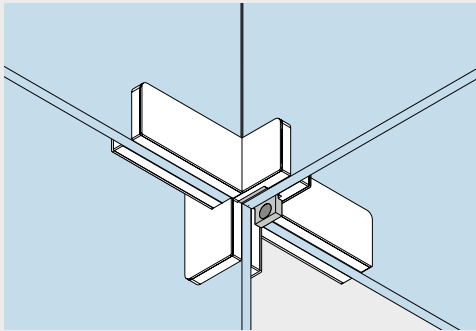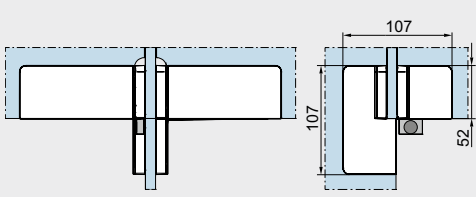
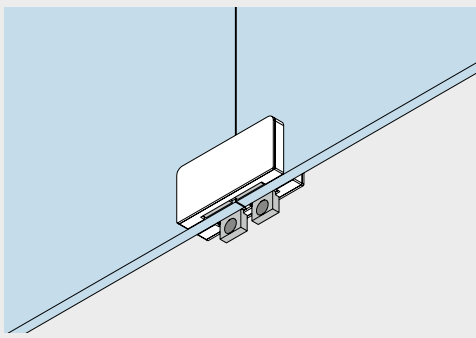
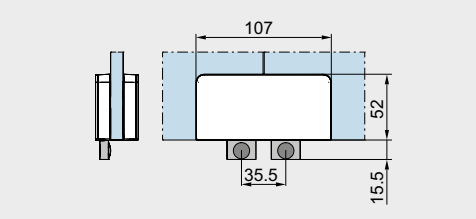
\* Left hand fin (illustration shows left hand) / right hand fin. Left or right hand are determined by view from outside.












	Product description	Glass thickness	Art. No.
	<p><b>PT 61 Premium connector</b> for double and single-action doors with fin fitting on both sides with 1 stop insert and 2 blanking inserts. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p> <p><b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.</p>	<p>8–15 mm 15–19 mm 19–22 mm</p>	<p><b>42.616</b> <b>42.618</b> <b>42.619</b></p>
	<p><b>PT 61 Comfort connector</b> for double and single-action doors with fin fitting on both sides with 1 stop insert and 2 blanking inserts. For use with toughened safety glass (TSG).</p> <p><b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.</p>	<p>8–15 mm</p>	<p><b>38.616</b></p>
	<p><b>PT 70 Premium overpanel connector</b> with 2 stop inserts and 2 blanking inserts. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p>	<p>8–15 mm 15–19 mm 19–22 mm</p>	<p><b>42.700</b> <b>42.702</b> <b>42.703</b></p>
	<p><b>PT 70 Comfort overpanel connector</b> with 2 stop inserts and 2 blanking inserts. For use with toughened safety glass (TSG).</p>	<p>8–15 mm</p>	<p><b>38.700</b></p>

# Locks and strike boxes

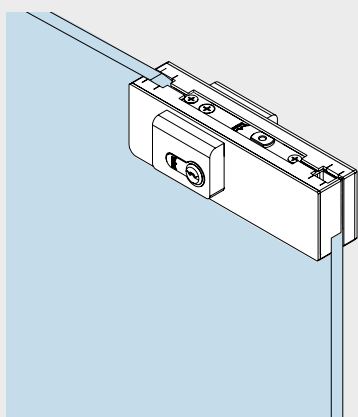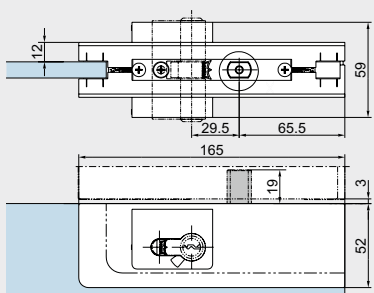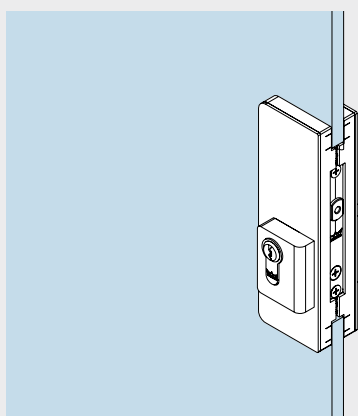Shown with 10 mm glass. When used with other glass thicknesses, the measurements change accordingly.



	Product description	Glass thickness	Art. No.
	<p><b>US 10 Premium corner lock</b>                      prepared for Euro profile cylinder, single throw, bolt projection 20 mm, with security rosettes on both sides 14 mm thick, for use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.  <b>With the order please indicate the exact glass thickness!</b>  <b>Lock insert:</b></p> <ul style="list-style-type: none"> <li>• maximum corrosion resistance according to EN 1670, class 4</li> <li>• with regard to type test according to DIN 18251 / (EN 12209) class 3*</li> </ul>	8–19 mm 19–22 mm	<b>42.510</b> <b>42.517</b>
	<p><b>US 10 Comfort corner lock</b>                      for use with toughened safety glass (TSG)                      KABA, for use with toughened safety glass (TSG)</p> <p><b>With the order please indicate the exact glass thickness!</b></p>	8–19 mm	<b>38.513</b>
	<p><b>US 20 Premium center lock</b>                      prepared for Euro profile cylinder, single throw, bolt projection 20 mm, with security rosettes 14 mm thick, for use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.  <b>With the order please indicate the exact glass thickness!</b>  <b>Lock insert:</b></p> <ul style="list-style-type: none"> <li>• maximum corrosion resistance according to EN 1670, class 4</li> <li>• with regard to type test according to DIN 18251 / (EN 12209) class 3*</li> </ul>	8–19 mm 19–22 mm	<b>42.520</b> <b>42.518</b>
	<p>prepared for KABA (Swiss profile round cylinder 22 mm) for use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.  <b>With the order please indicate the exact glass thickness!</b></p>	8–19 mm 19–22 mm	<b>42.523</b> <b>42.519</b>

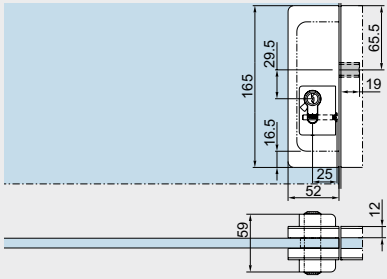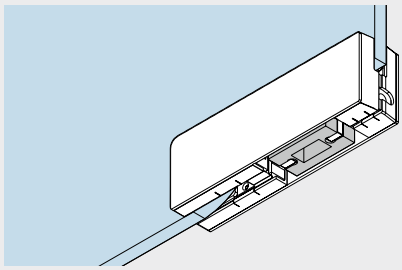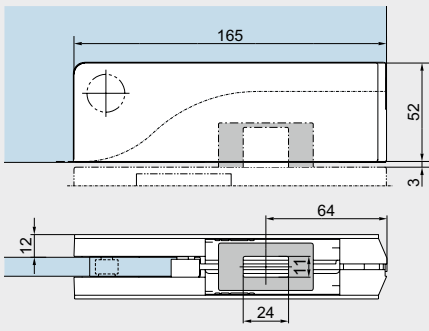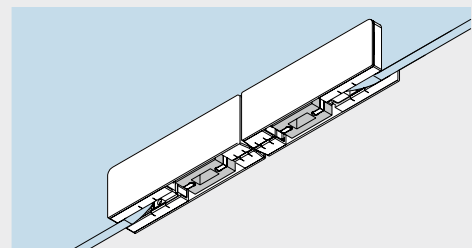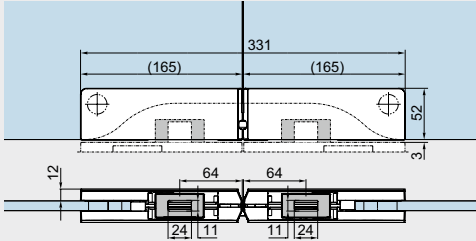	Product description	Glass thickness	Art. No.
	<p><b>US 20 Comfort center lock</b> for use with toughened safety glass (TSG)</p> <p>KABA, for use with toughened safety glass (TSG) <b>With the order please indicate the exact glass thickness!</b></p> <p>* Extract from DIN 18251, class 3: Type-test with 50,000 locking bolt operating cycles. Furthermore the lock was tested successfully by a neutral testing institute with 100,000 locking bolt operating cycles.</p>	8–19 mm	<b>38.520</b>
	<p><b>GK 30 Premium single overpanel strike box</b> with tapped hole at side. Suitable for corner lock US 10. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p> <p>To install correctly, you will need to use either a screw-on fixing bracket, a wall anchor or a threaded rod fixing, see page 31.</p>	8–15 mm 15–19 mm 19–22 mm	<b>42.530</b> <b>42.532</b> <b>42.548</b>
	<p><b>GK 30 Comfort single overpanel strike box</b> with tapped hole at side. Suitable for corner lock US 10. For use with toughened safety glass (TSG).</p> <p>To install correctly, you will need to use either a screw-on fixing bracket, a wall anchor or a threaded rod fixing, see page 31.</p>	8–12 mm	<b>38.530</b>
	<p><b>GK 20 Premium double overpanel strike box</b> Suitable for corner lock US 10 consisting of two GK 30 with threaded connecting bolt. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p>	8–15 mm 15–19 mm 19–22 mm	<b>42.526</b> <b>42.528</b> <b>42.529</b>
	<p><b>GK 20 Comfort double overpanel strike box</b> Suitable for corner lock US 10 consisting of two GK 30 with threaded connecting bolt. For use with toughened safety glass (TSG).</p>	8–12 mm	<b>38.526</b>

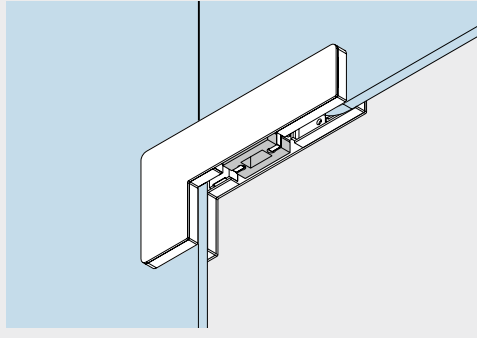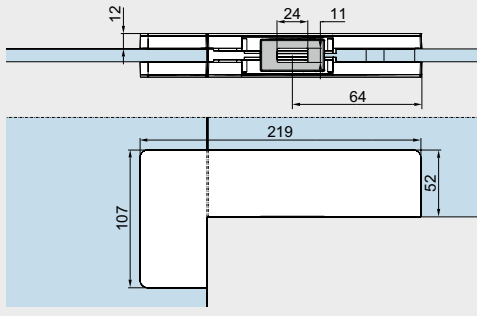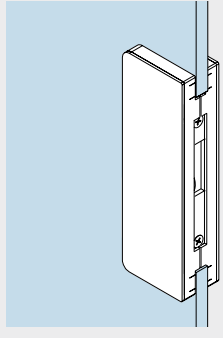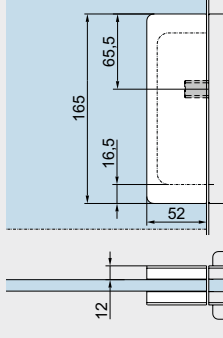
	Product description	Glass thickness	Art. No.
	<p><b>GK 40 Premium corner overpanel strike box</b>                      Suitable for corner lock US 10.                      For use with toughened safety glass (TSG).                      Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p> <p><b>Please note:</b>                      The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.</p>	<p>8–15 mm                      15–19 mm                      19–22 mm</p>	<p><b>42.540</b>  <b>42.542</b>  <b>42.547</b></p>
	<p><b>GK 40 Premium corner overpanel strike box</b>                      Suitable for corner lock US 10.                      For use with toughened safety glass (TSG).</p> <p><b>Please note:</b>                      The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.</p>	<p>8–12 mm</p>	<p><b>38.540</b></p>
	<p><b>GK 50 Premium strike box</b>                      Suitable for center lock US 20.                      For use with toughened safety glass (TSG).                      Also prepared for use with laminated safety glass (LSG) – separate gaskets required.</p> <p><b>With the order please indicate the exact glass thickness!</b></p>	<p>8–19 mm                      19–22 mm</p>	<p><b>42.550</b>  <b>42.553</b></p>
	<p><b>GK 50 Comfort strike box</b>                      Suitable for center lock US 20.                      For use with toughened safety glass (TSG).</p> <p><b>With the order please indicate the exact glass thickness!</b></p>	<p>8–19 mm</p>	<p><b>38.550</b></p>

# Installation details (in contrast to UNIVERSAL)

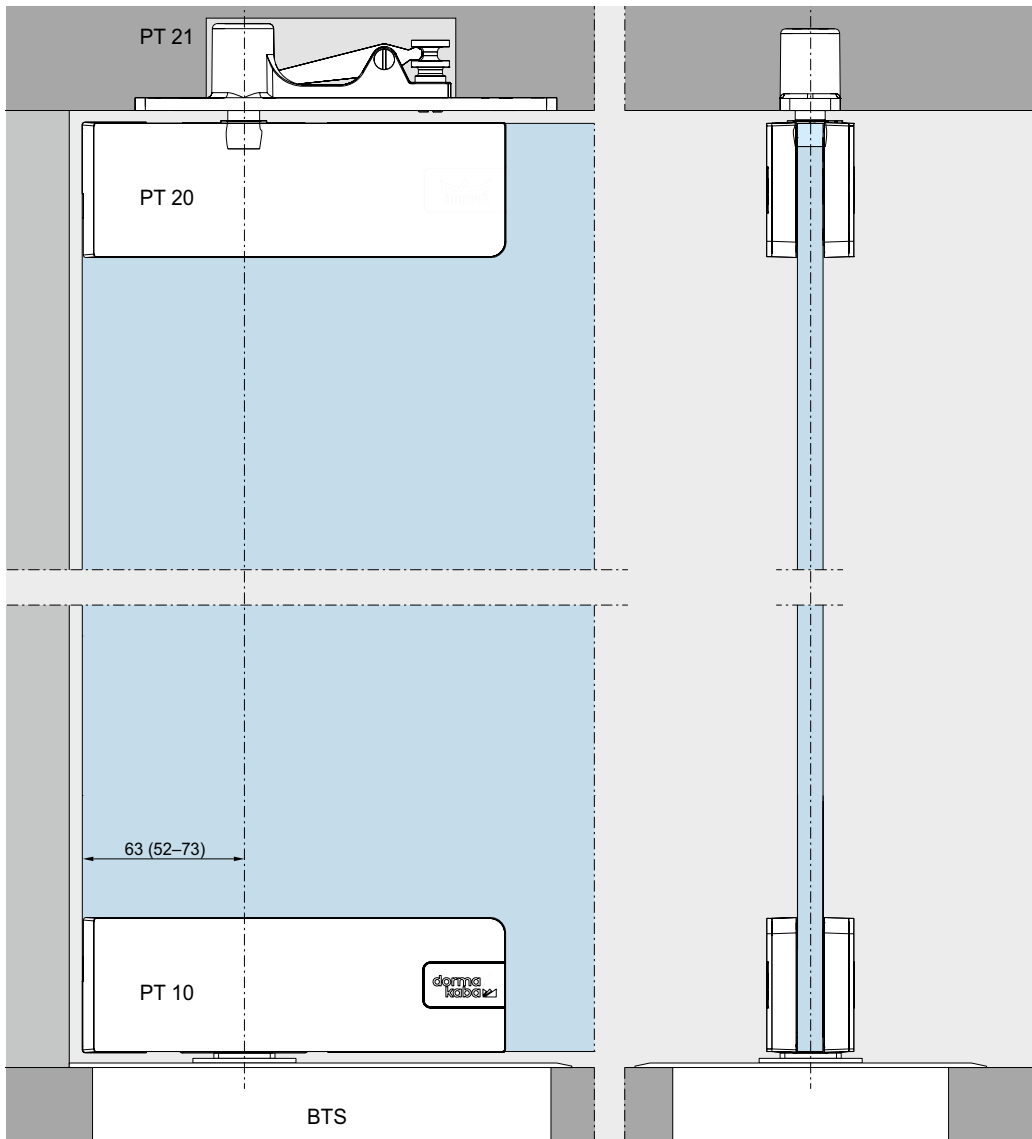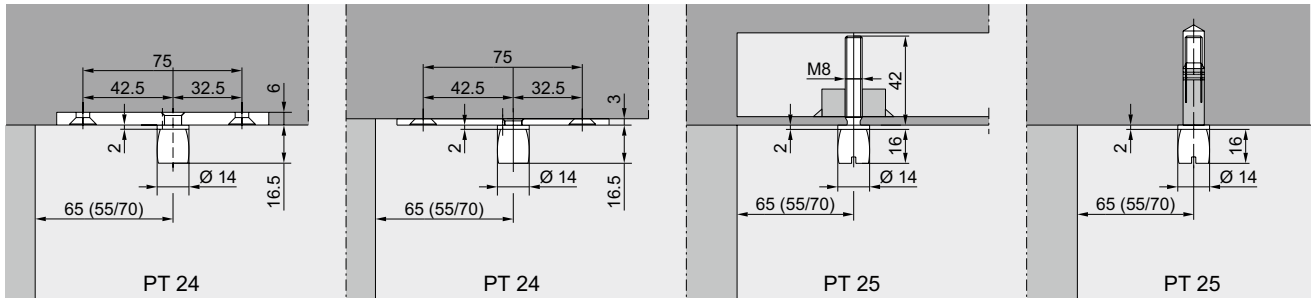**Advisory:** Please note that the upper pivots for MUNDUS and those for UNIVERSAL are not mutually compatible. The spigot diameters of the MUNDUS fittings vary.







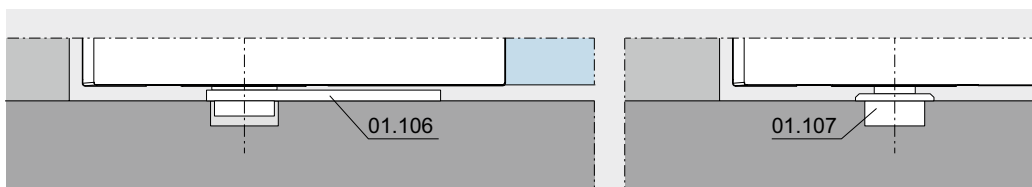
Fixing of top pivots and top centers for PT 20.






Fixing of floor springs, pivot bearings for PT 10.

# Top bearing, pivots for MUNDUS



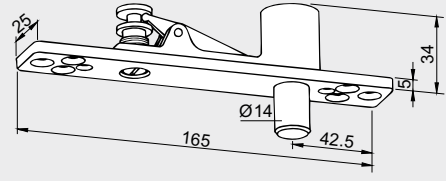
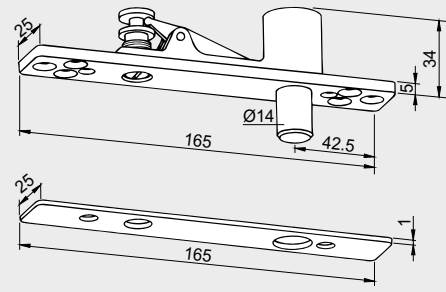
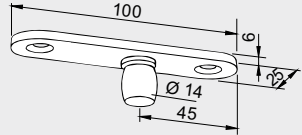
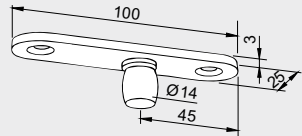
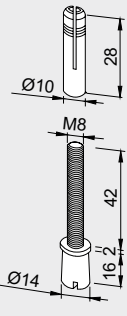
**Advisory:** Please note that the upper pivots for MUNDUS and those for UNIVERSAL are not mutually compatible. The spigot diameters of the MUNDUS fittings vary.

	Product description	Art. No.
	<p><b>MUNDUS PT 21 frame portion top centre</b> with removable pin</p> <p>Weight in kg: 0.335</p> <p>14 mm Ø</p>	<p><b>38.210</b></p>
	<p><b>MUNDUS PT 21 frame portion top centre</b> with removable pin, with cover plate</p> <p>Weight in kg: 0.345</p> <p>14 mm Ø</p>	<p><b>38.211</b></p>
	<p><b>MUNDUS PT 24 pivot</b> with fixing plate, material thickness 6 mm, <b>to let into ceiling</b></p> <p>Weight in kg: Aluminum 0.058</p> <p>14 mm Ø</p>	<p><b>38.240</b></p>
	<p><b>MUNDUS PT 24 pivot</b> with fixing plate, material thickness 3 mm, <b>to screw on the ceiling</b></p> <p>Weight in kg: Aluminum 0.042 Stainless steel 0.074</p> <p>14 mm Ø</p>	<p><b>38.241</b></p>
	<p><b>MUNDUS PT 25 pivot</b> with plug</p> <p>Weight in kg: 0.044</p> <p>14 mm Ø</p>	<p><b>38.250</b></p>

# Wall connection for MUNDUS




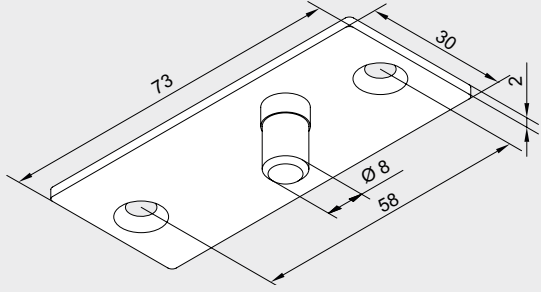


	Product description	Art. No.
	<p><b>Fixing plate</b> for overpanel patch fitting PT 30 and overpanel strike box GK 30</p> <p>Weight in kg: 0.041</p> <p>Not available in brass or aluminum.</p>	<p><b>38.313</b></p>
	<p><b>Wall anchor</b> with thread M 8 for overpanel patch</p> <p>Weight in kg: 0.040</p>	<p><b>01.133</b></p>
	<p><b>Threaded rod</b> M 8 with plug for overpanel patch</p> <p>Weight in kg: 0.032</p>	<p><b>01.134</b></p>

# Floor bearing, lock keeper plate, floor socket for MUNDUS

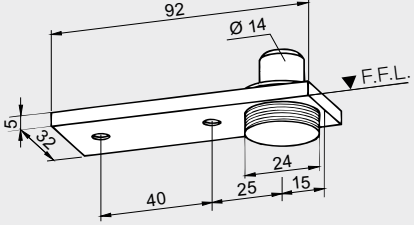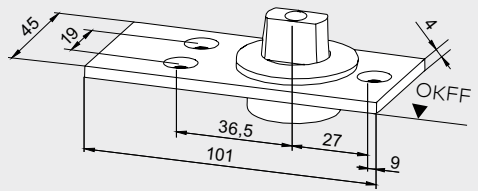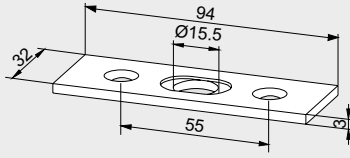
	Product description	Art. No.
	<p><b>Floor pivot bearing</b> with round pivot 14 mm Ø, and cover plate; height adjustable by 5 mm max. door weight 100 kg</p> <p>Weight in kg: Aluminum 0.155 Brass 0.170 Stainless steel 0.169</p>	<b>01.106</b>
	<p><b>Floor pivot bearing</b> with round pivot 14 mm Ø and pin 24 mm Ø max. door weight 100 kg</p> <p>Weight in kg: 0.078</p>	<b>01.107</b>
	<p><b>Floor bearing</b> with DORMA profile spindle (longer spindle on request), max. door weight 200 kg</p> <p>Stainless steel, max. door weight 200 kg</p> <p>Weight in kg: 0.254</p>	<b>04.602</b>  <b>04.603</b>
	<p><b>Lock keeper plate,</b> stainless steel, two parts, adjustable ± 5 mm</p> <p>Weight in kg: 0.048</p>	<b>05.190</b>
	<p><b>Floor socket,</b> zinc coated brass for lock bolt</p> <p>Weight in kg: 0.020</p>	<b>05.192</b>
	<p><b>Floor socket,</b> aluminum, with spring and plastic stopper, dirt protection</p> <p>Weight in kg: 0.026</p>	<b>05.193</b>
	<p><b>Eccentric socket,</b> eccentric, zinc coated brass, with adjustable plastic socket insert</p> <p>Weight in kg: 0.020</p>	<b>05.194</b>




# Accessories for use with laminated safety glass

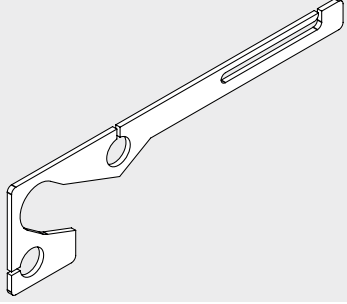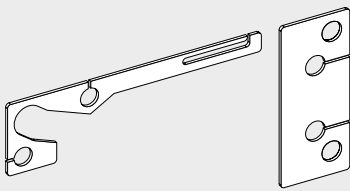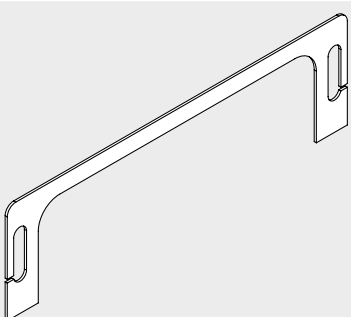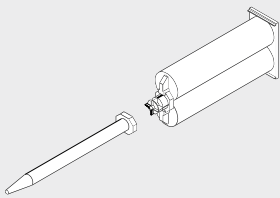	Product description	Art. No.
	<b>MUNDUS Premium LSG gaskets</b> PT 10/20/30/GK 30 LSG glue 07.631 is needed	<b>42.951</b>
	<b>MUNDUS Premium LSG gaskets</b> PT 40 LSG glue 07.631 is needed	<b>42.952</b>
	<b>MUNDUS Premium LSG gaskets</b> PT 60 LSG glue 07.631 is needed	<b>42.953</b>
	<b>MUNDUS Premium LSG gaskets</b> PT 70 LSG glue 07.631 is needed	<b>42.954</b>
	<b>MUNDUS Premium LSG gaskets</b> US 10/20/GK 50 LSG glue 07.631 is needed	<b>42.955</b>
	<b>Glue and nozzle for LSG</b>	<b>07.631</b>


# Glass preparation patch fittings

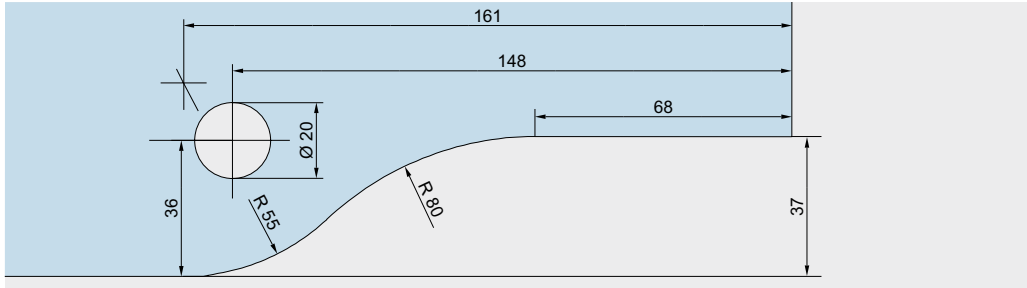

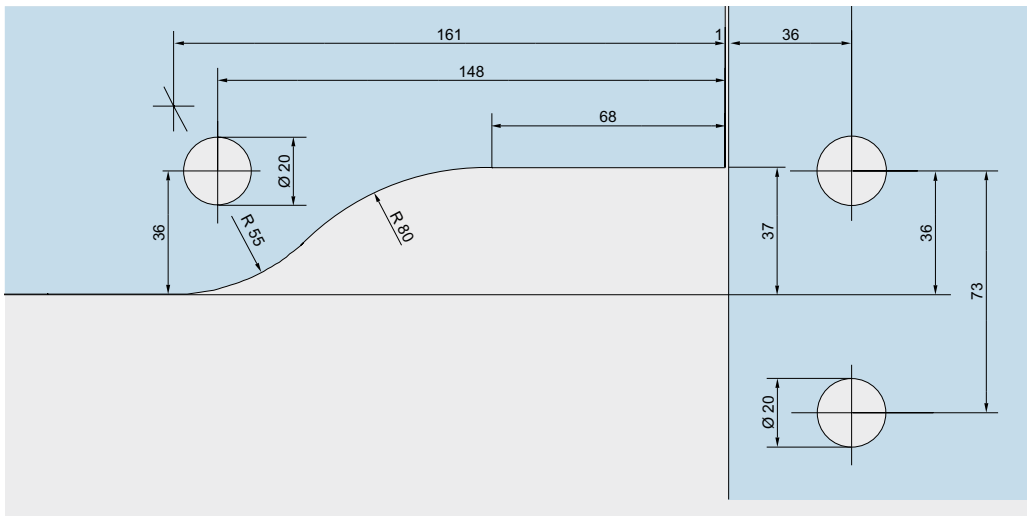
**PT 10, PT 20,  
PT 22, PT 30**  
Top and bottom  
patches,  
overpanel patch




**PT 40**  
Patch for  
overpanel and  
sidelight

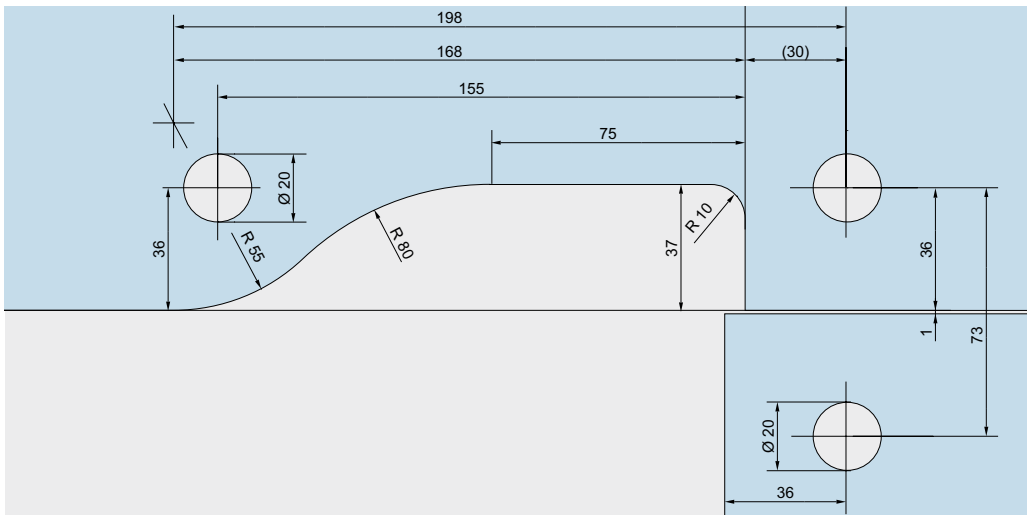



**PT 40**  
Angle patch fitting  
with continuous  
overpanel

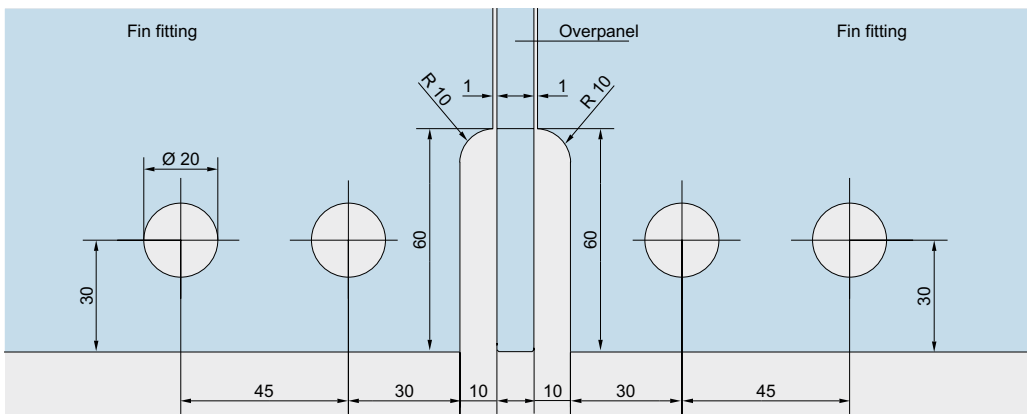


**PT 41**  
Patch for  
overpanel and  
sidelight with  
fin fitting on  
both sides

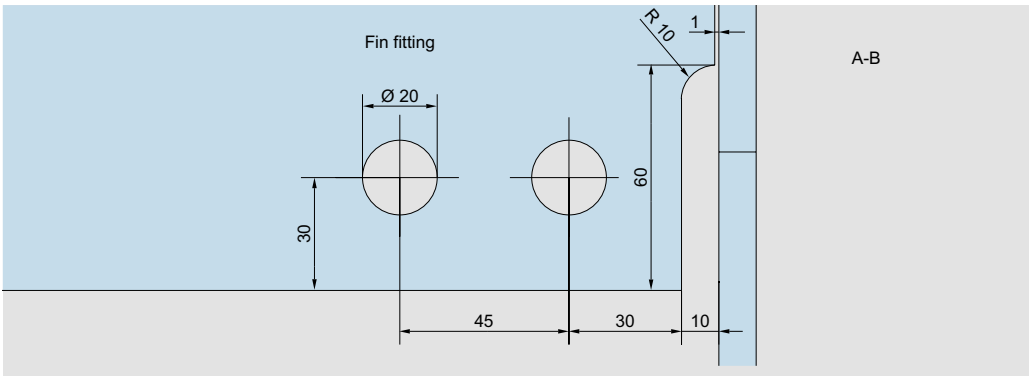


**PT 41**  
Patch for overpanel and sidelight with fin fitting inside

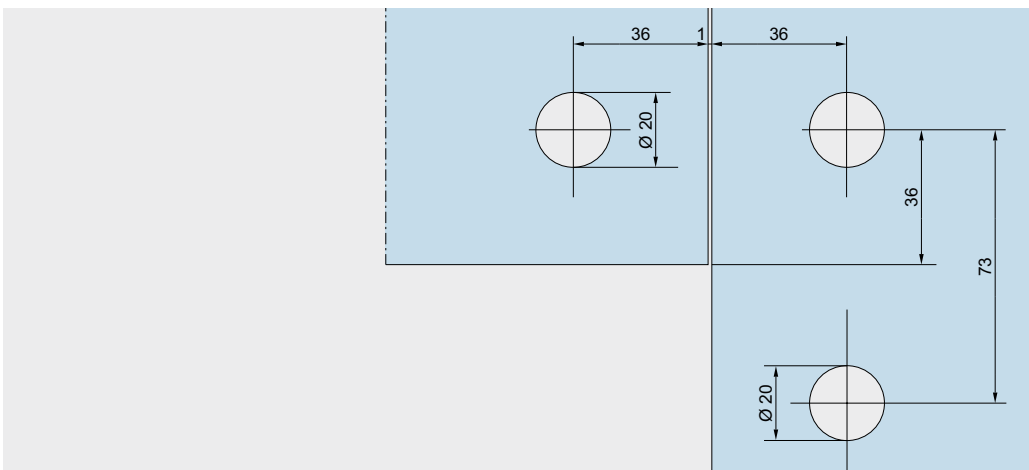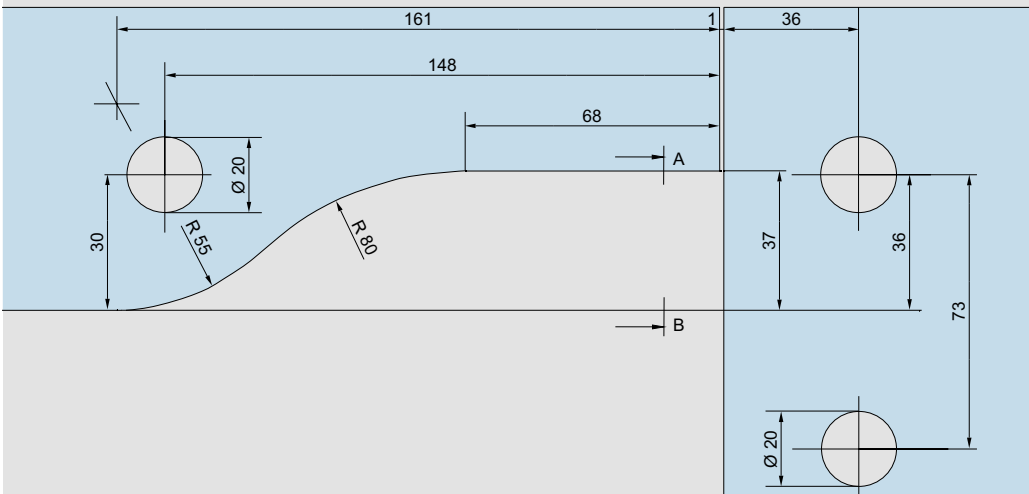



**PT 60**  
Connectors for overpanels and sidelights

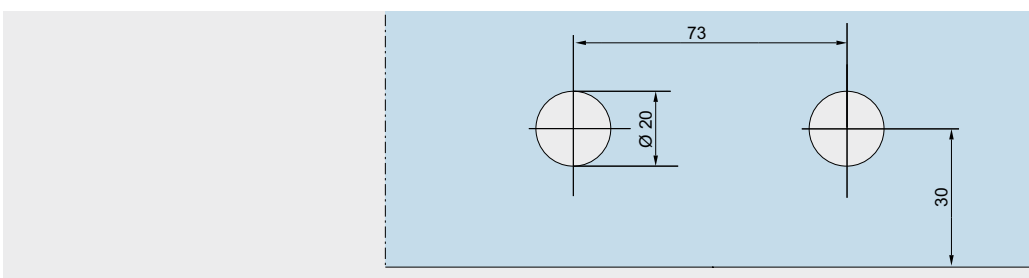


**PT 70**  
Overpanel connector

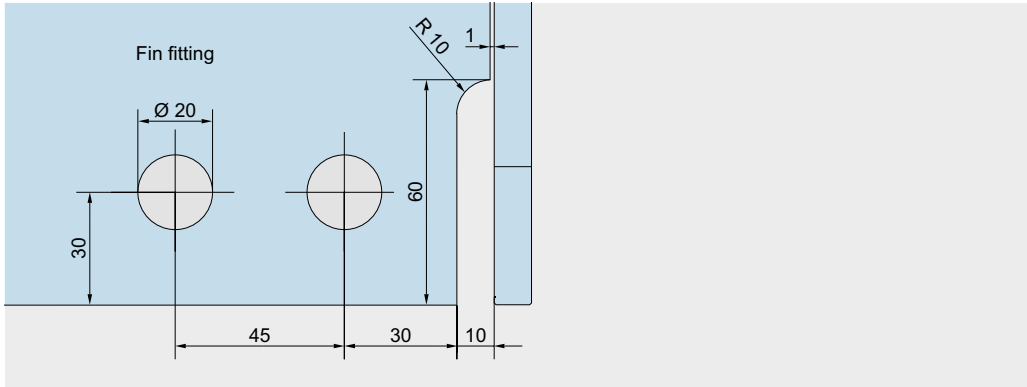


**PT 61**  
Single overpanel  
connector  
with fin fitting  
inside

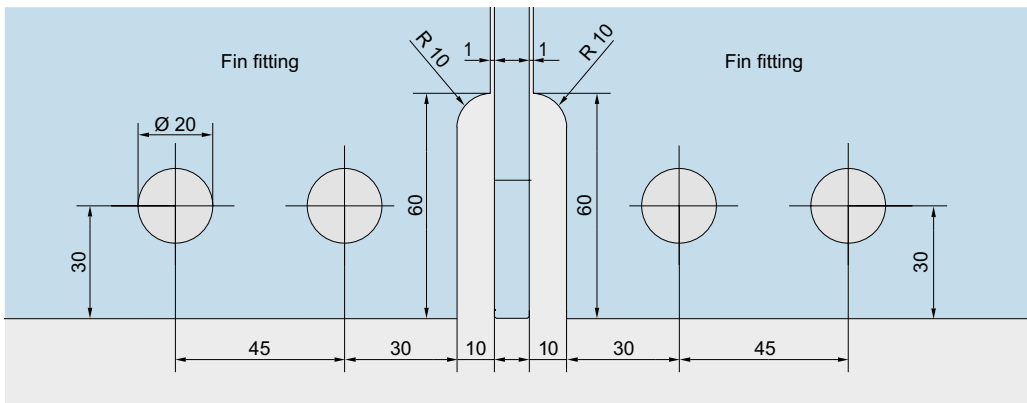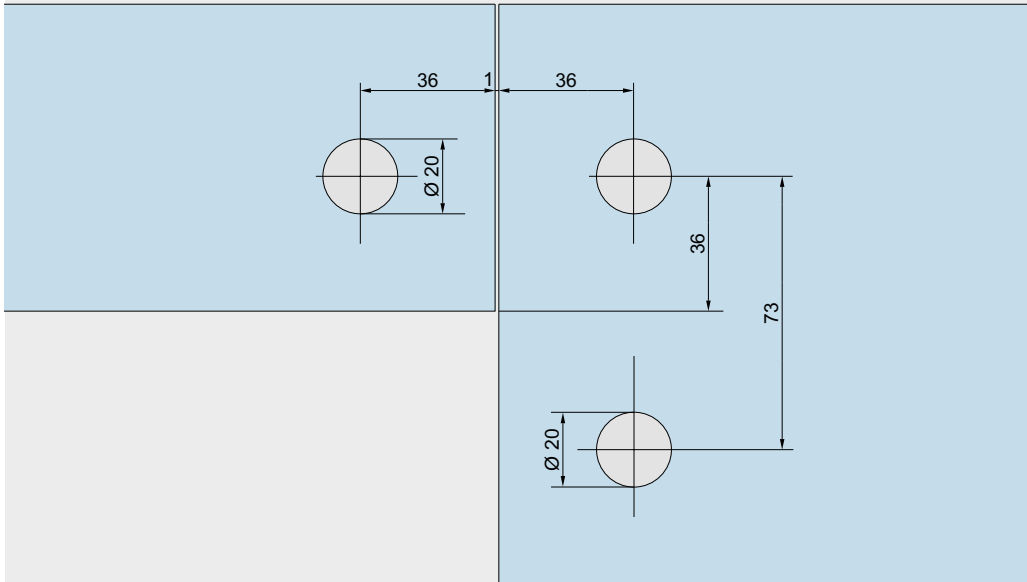


**PT 61**  
Double overpanel  
connectors  
with fin fitting on  
both sides

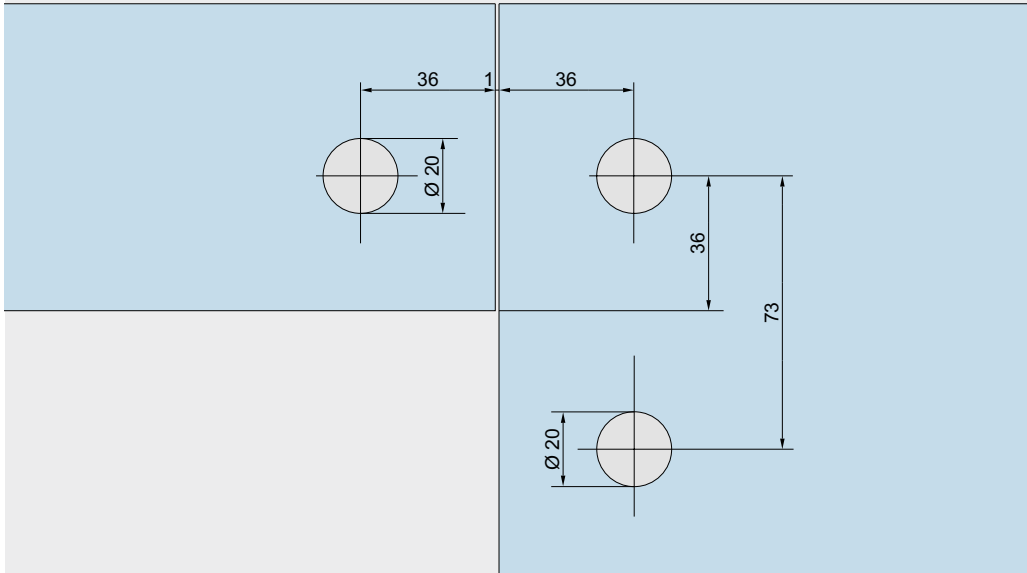


# Glass preparation locks and strike boxes

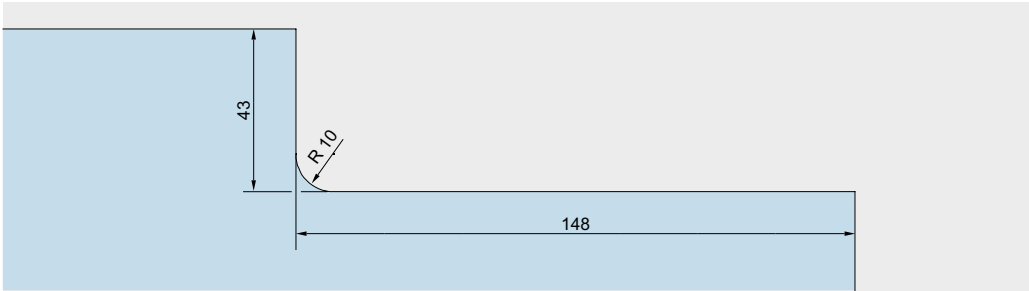


**US 10**  
Corner locks

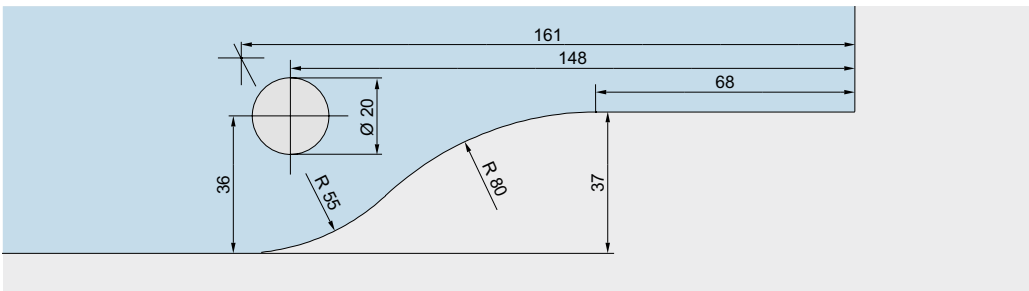

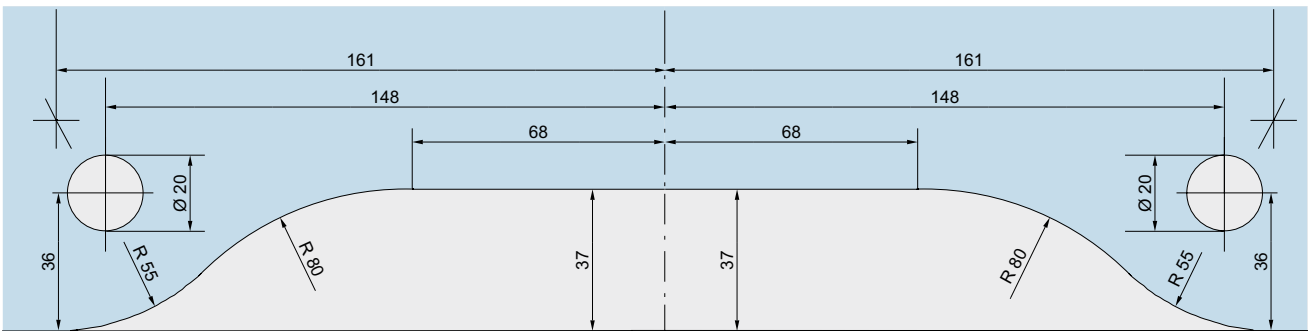**GK 30 (PT 30)**  
Single overpanel strike box



**GK 20**  
Double overpanel strike box

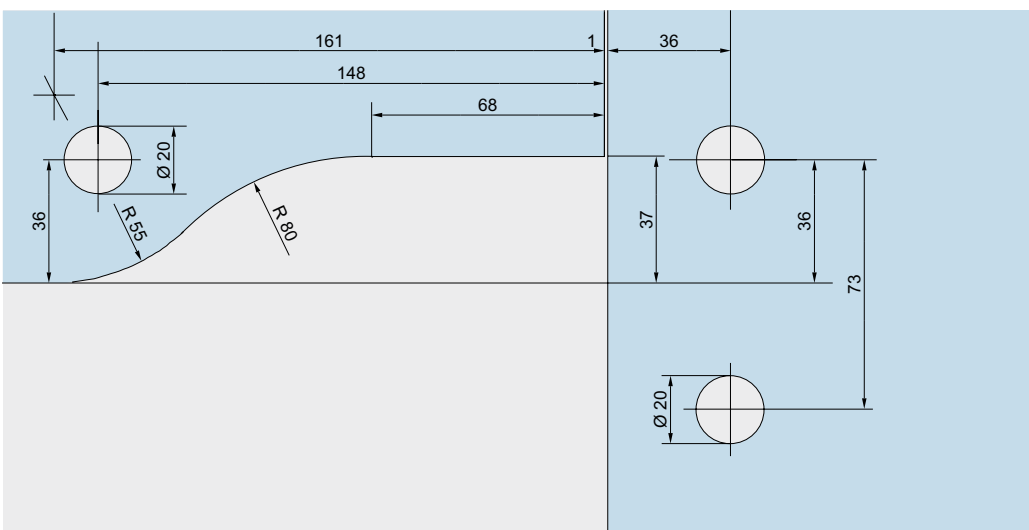


**GK 40 (PT 40)**  
Corner overpanel strike box

---

**Product description**

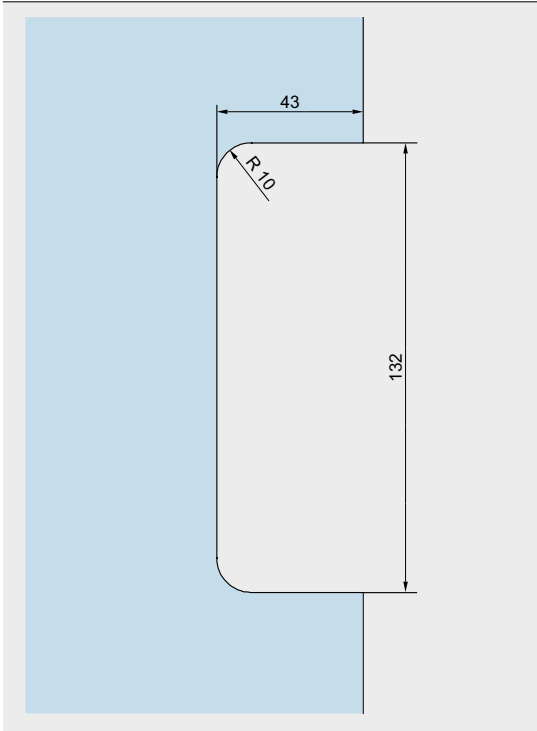**US 20, GK 50**

Center lock and strike box to suit center lock



# Space for your notes

# Content

## UNIVERSAL

42	<b>General information</b>
44	<b>Type illustration</b>
48	<b>Components</b>
62	<b>Applications pinch free</b>
63	<b>Components pinch free</b>
65	<b>Glass preparation UNIVERSAL</b>
76	<b>Glass preparation UNIVERSAL pinch free</b>
80	<b>UNIVERSAL Arcos</b>
90	<b>Glass preparation UNIVERSAL Arcos</b>
224	<b>Accessories</b>
248	<b>Safety-related information</b>





**UNIVERSAL**

# UNIVERSAL ... as the name says

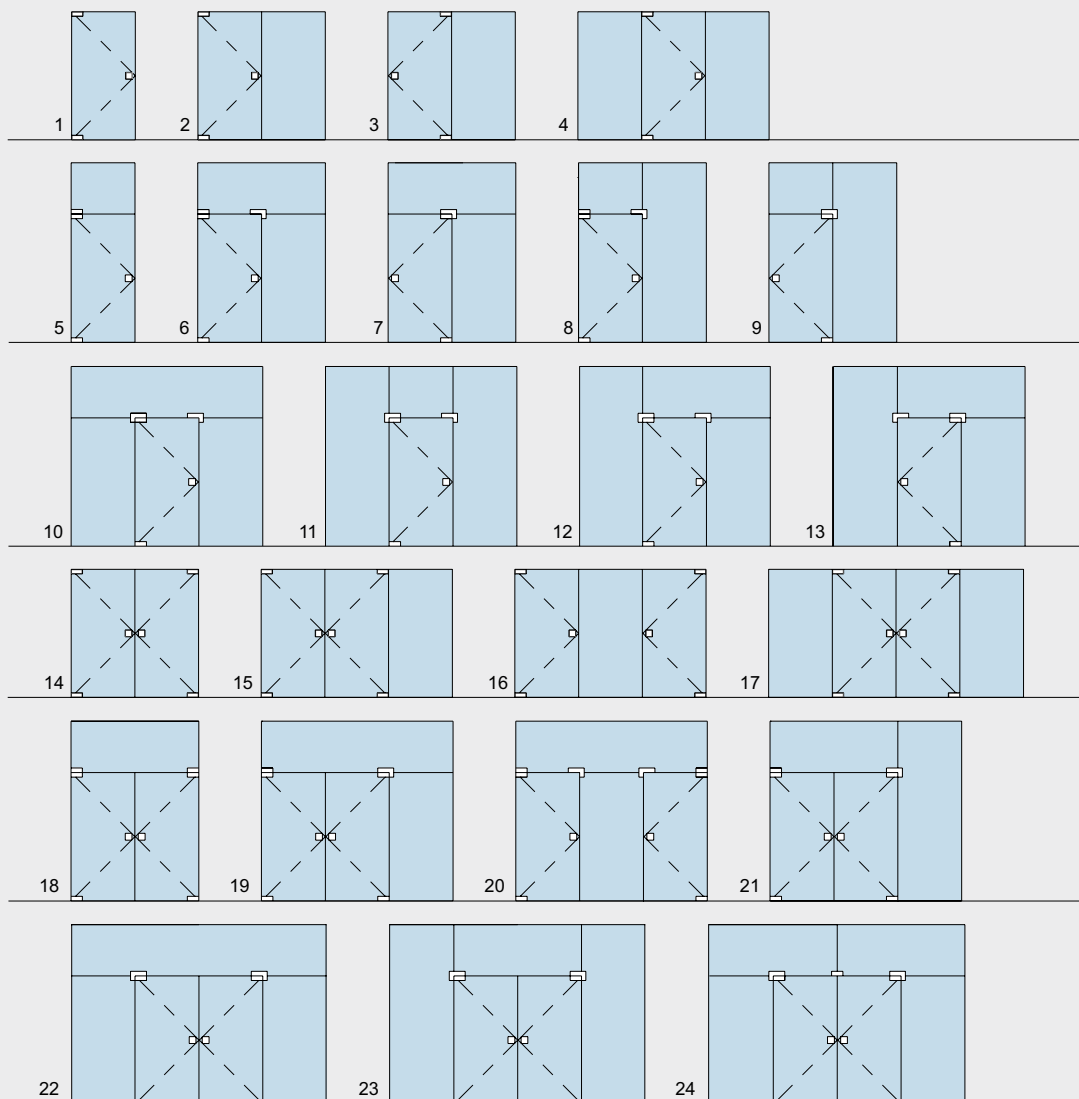
With its broad spectrum of basic types and variants, the UNIVERSAL range of patch fittings enables the realisation in toughened glass of almost any conceivable design. Toughened glass assemblies can be provided with fixed parts in widely differing arrangements – with corner fittings or fin fittings at different angles, and with double or single-action doors in single-leaf or double-leaf designs.

## Easy glass preparation, secure fixing

dormakaba has an intimate knowledge of the special properties of glass as a building material. This has led to the design of fittings requiring only minimal glass preparation – a quick and easy cut-out with additional holes. Carefully considered and positive measures have been taken to create the maximum clamping surface with optimum clamping efficiency.

## Suitable for common glass thicknesses

UNIVERSAL fittings are supplied as standard with gasket to suit 10 mm glass (TSG). For 8 mm and 12 mm glass, correspondingly thicker and thinner gasket is available. Some patches are even designed to fit directly with different glass thicknesses.



**Variable pivot point**

The inserts for corner and overpanel patches in the UNIVERSAL program have been designed and manufactured to give two options in the pivot point distance from the sidepanel or frame. It can be either 55 mm or 65 mm. At 65 mm pivot point and the use of a special round profile (page 146) doors can be built with a constant air gap of only 4 mm.

For information regarding patch fittings UNIVERSAL with 15 mm pivot point for pinch free doors see page 62 and following pages.

**Reliability built in**

Quality materials and thorough workmanship mean that UNIVERSAL fittings have the features necessary to meet the most demanding of specifications. The fittings are designed to cope with large and heavy doors up to a maximum weight of 110 kgs: for instance, a door blade 3,000 mm high by 1,100 mm wide, using 12 mm glass is quite possible.

Door leaf weights up to 130 kg and widths up to 1,300 mm are permissible in the case of low-usage doors. Please contact our Application Engineering department for more information.

For heavier and wider doors up to a maximum of 150 kg and max. 1,400 mm and for high frequented doors, rails with reinforced straps are available.

**Matching range of locks**

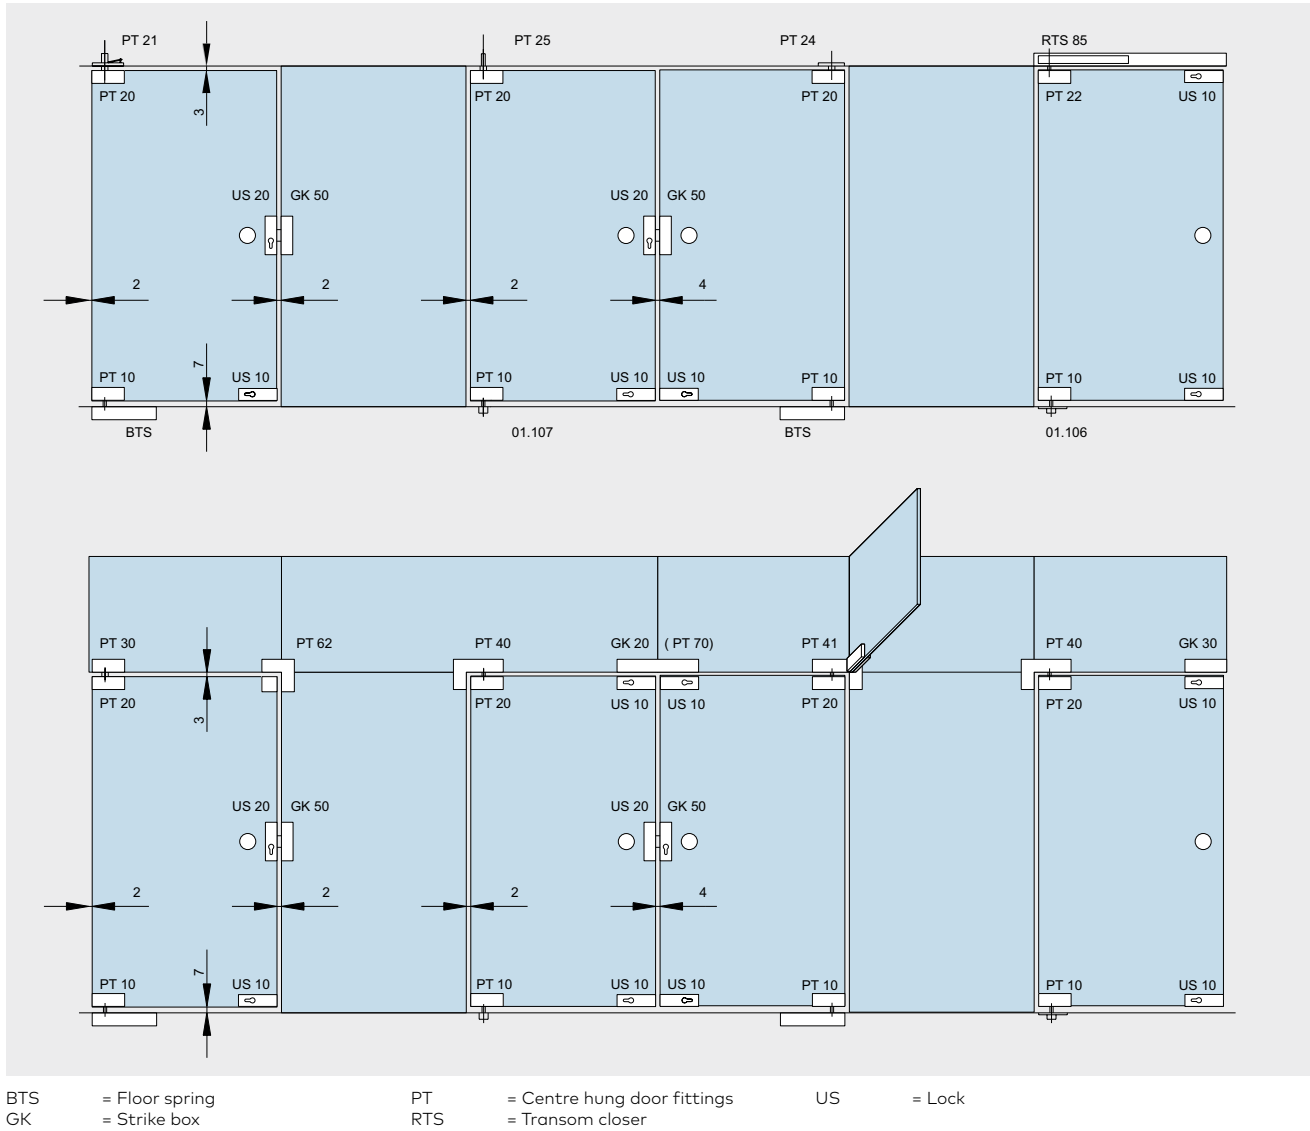
The UNIVERSAL range includes every type of accessory, and of course, a variety of locks and strike boxes in a matching design concept, giving the designer plenty of choice from the options available.

**Short delivery times**

All the common patterns and types are available ex-stock (factory). Specials will be prepared promptly.

# Type section

**Toughened glass assemblies with fittings (55/65 mm pivot point) and locks.**  
**All standard assembly types see page 42.**



## Maximum door weight and width for UNIVERSAL fittings

max. door weight: 110 kg\*

max. door width: 1,100 mm\*\*

Door leaf weights up to 130 kg and widths up to 1,300 mm are permissible in the case of low-usage doors. Please contact our Application Engineering department for more information.

For doors with higher frequency and in public areas we would advise to use a door rail for doors above 110 kg and door width larger than 1,100 mm.

For door weights up to 150 kg and widths up to 1,400 mm door rails should be used.

### \* For door heights up to 2,500 mm

For doors with a height of more than 2,500 mm we have to keep additional conditions/limits:

- Glass thickness >/= 10 mm
- + Usage of a handle bar with 3 connection points in minimum and a minimum height of 2/3 door height

### \*\* Use of door closers:

Doors < / = 1,100 mm must be provided with door closers of type EN 3 (with or without backcheck), and doors > / = 1,100 mm need to be fitted with larger door closers (e.g. EN 4, 5 or 6) without backcheck.

**Torque for fixing screws**

Screws M 6: 10 Nm (4 mm)\*

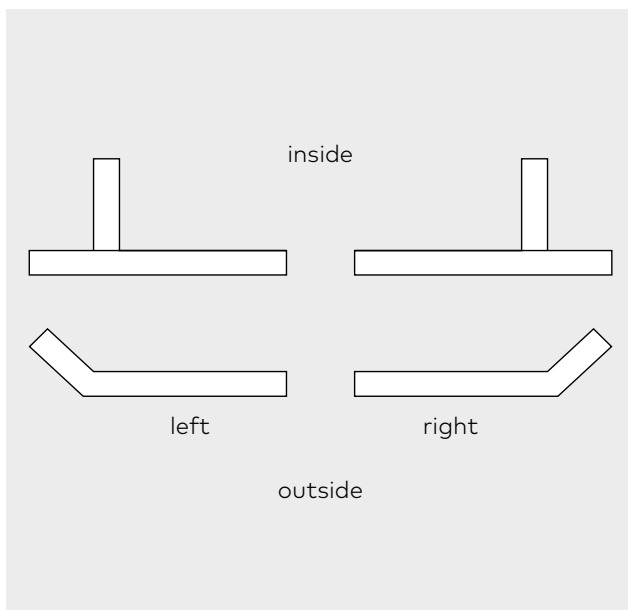
Screws M 6: 15 Nm (5 mm)\*

Screws M 8: 20 Nm (5 mm)\*

\*Allan key size

**Please note: If angle fittings or fin fittings are used:**

"Left" or "Right" have to be determined in any case by view from outside and above.



# UNIVERSAL Motion – the self-closing patch fitting

A patch fitting with hydraulic self-closing function is not just convenient but also efficient: The hydraulic technology proves its advantage without requiring a power supply and any visible mechanism. UNIVERSAL Motion is like a reliable employee with intrinsic values: the space-saving technology is integrated in the compact bottom patch fitting and does not require any additional installation space.

## Eight reasons for the one.

- **Completely smart.** In UNIVERSAL Motion, the door closing function is integrated in a compact, well-shaped unit. A subtly functional design.
- **Almost invisible.** What looks like a patch fitting manages the closing of doors by itself. An additional floor spring is not required.
- **Clear savings.** Less effort and cost-efficient. You need only two fittings for the self-closing swing door: UNIVERSAL Motion and PT 20.
- **Comfortable function.** The door closes softly by itself. The hydraulic door movement is achieved simply in the fitting – without extra installation, without power supply.
- **Simple installation.** UNIVERSAL Motion consists of very few parts. The glass door is clamped in the fitting. No prior changes to the floor are required.
- **For the existing building.** Retrofitting is clearly simpler than before. The floor need not be sawn nor milled beforehand.
- **Simple positioning.** The material and composition of the floor are not critical factors. You need to place only four vertical bores for the bottom pivot bearing.
- **Different surface finishes.** The dormakaba colour palette creates systematic diversity. The colour spectrum corresponds to the standard UNIVERSAL fittings. A custom-made colour scheme as per RAL is also possible. Simply matches the contemporary interior.



## Technical features:

Glass thickness:	10 + 12 mm ESG
Door width:	von 650 mm bis 1000 mm*
Door height:	max. 3000 mm
Door weight:	max. 100 kg
Pivot point:	67 mm

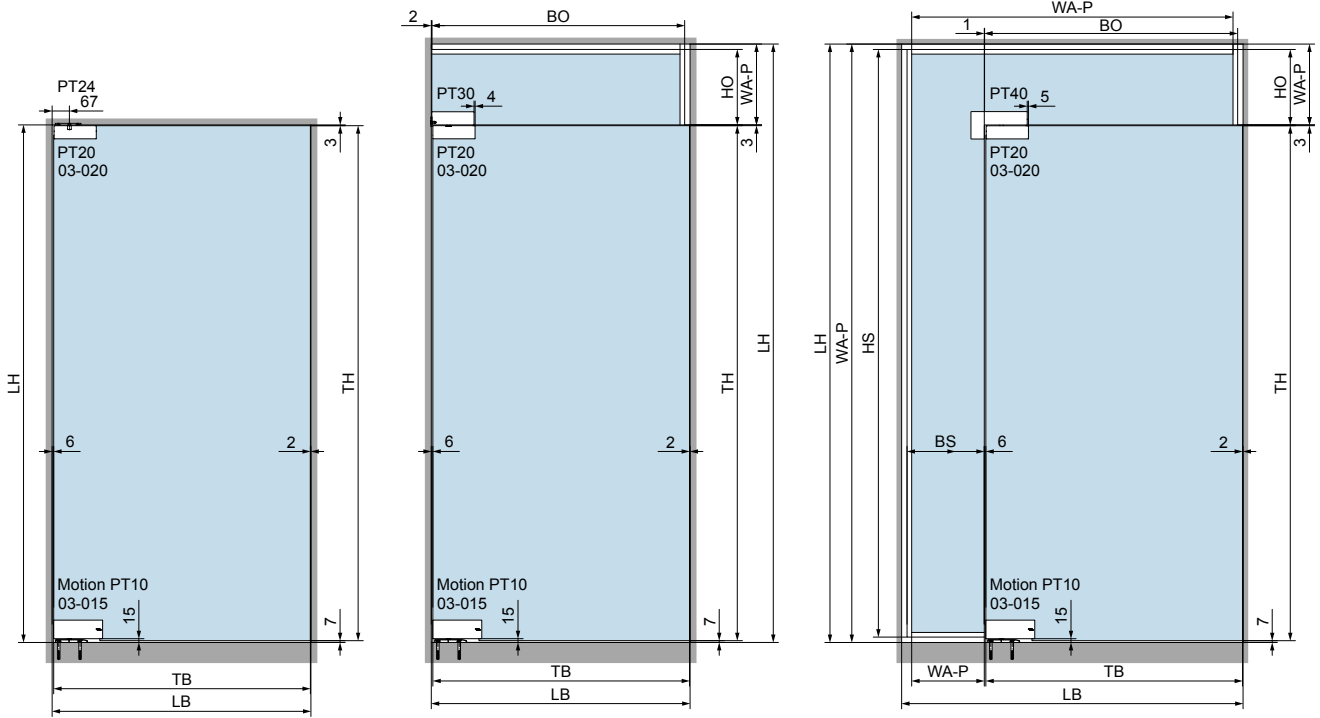
The screw depth in the bottom of the supplied screws for the floor pivot bearing is 65 mm.

Available in the surface variants stainless steel and aluminium, as well as the product variants with 90 degree hold-open and without hold-open.

UNIVERSAL Motion is intended for indoor use. The fitting is not suitable for outdoor applications and for doors in high-frequency areas / public buildings.

UNIVERSAL Motion is tested by dormakaba according to DIN EN 1191:2013 for 300,000 test cycles.

\* Door widths smaller than 650 mm can be realized from a product technical point of view. However, the opening forces to be applied are outside the DIN 12217 standard then.




TH = Door height  
 TB = Door width  
 LH = Clear height

LB = Clear width  
 WA-P = Length WA-P  
 HS = Height side panel

BS = Width side panel  
 HO = Height overpanel  
 BO = Width overpanel





**Hint:**

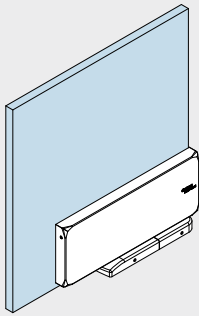To extend the tolerance range, it is possible to increase the glass bore for the PT20 from ø20 to ø22.

	Produktbeschreibung	Glasdicke	Art.-Nr.
	<p><b>UNIVERSAL Motion,</b>                      lower corner fitting with hydraulic door closing function, including floor pivot bearing and fixing material</p>		
	<p>with 90 degrees hold-open</p>	10 + 12 mm	<b>03.108</b>
	<p>without hold-open</p>	10 + 12 mm	<b>03.109</b>
<p>Weight in kg:                      Aluminum: 2,211                      Satin stainless steel: 2,413</p>			





# Patch fittings

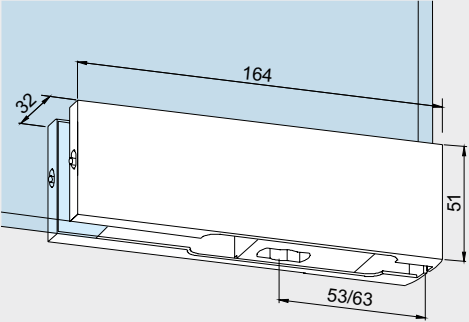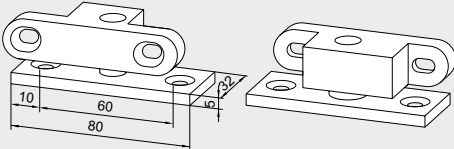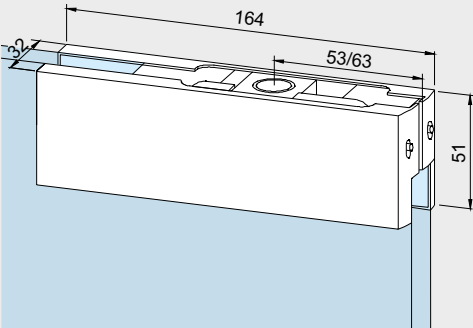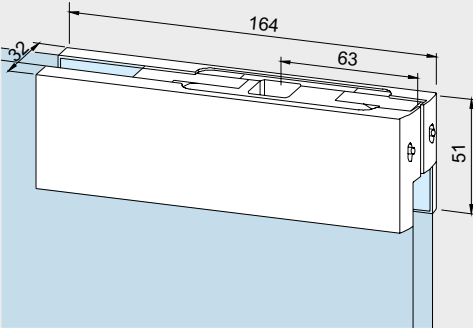Shown with 10 mm glass. From 12 mm glass the measurements change accordingly. Accessories see page 224 and following.






	Product description	Glass thickness	Art. No.
	<p><b>PT 10 UNIVERSAL</b>  <b>Bottom patch</b>                      with insert for DORMA floor spring spindle, or round pivot 14 mm Ø</p> <p><b>With the order please indicate the exact glass thickness!</b></p> <p>Weight in kg:                      Aluminum 0.564                      Brass 0.680                      Stainless steel 0.662</p>	10 mm 13 - 19 mm	*03.100 03.280
	<p><b>Floor pivot bearing</b>                      for damp environments, with insert for PT 10 UNIVERSAL <b>without floor recess</b>, max. door weight 80 kg</p> <p>Weight in kg: 0.195</p> <p>Only for UNIVERSAL applications, not suitable for MUNDUS.</p>	10 mm	01.137
	<p><b>PT 20 UNIVERSAL</b>  <b>Top patch</b>                      with plastic socket for top pivot 15 mm Ø</p> <p><b>With the order please indicate the exact glass thickness!</b></p> <p>Weight in kg:                      Aluminum 0.477                      Brass 0.593                      Stainless steel 0.575</p>	10 mm 13 - 19 mm	*03.110 03.281
	<p><b>PT 22 UNIVERSAL</b>  <b>Top patch</b>                      with insert for DORMA RTS transom closer</p> <p>Weight in kg:                      Aluminum 0.578                      Brass 0.695                      Stainless steel 0.677</p>	10 mm	03.112

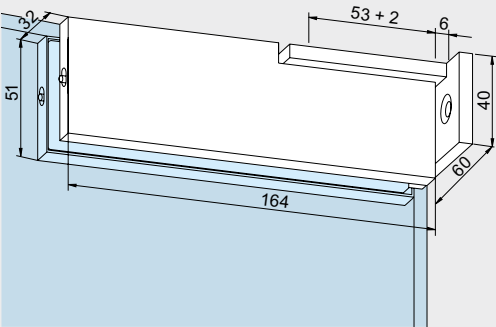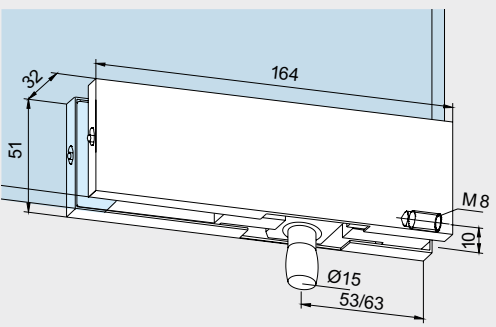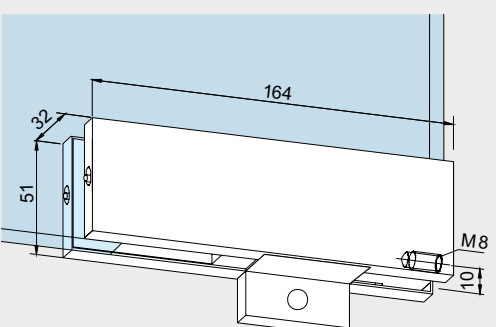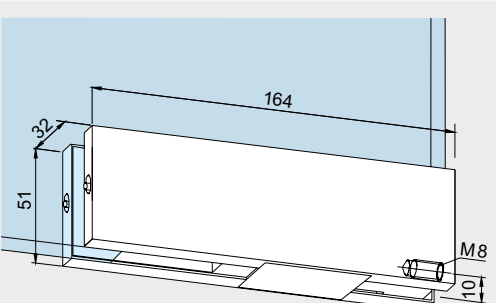\* Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 232.







	Product description	Glass thickness	Art. No.
	<p><b>PT 29 UNIVERSAL</b>  <b>Top patch</b>                      with pivot fixing plate,                      to countersink into ceiling                      (pivot point = 55 mm)</p> <p>max. door width: 1,000 mm                      max. door weight: 70 kg</p> <p>Weight in kg:                      Aluminum 0.544                      Brass 0.692</p>	<p>10 mm</p>	<p><b>03.114</b></p>
	<p><b>PT 30 UNIVERSAL</b>  <b>Overpanel patch</b>                      with pivot 15 mm Ø, with                      M8 tapped hole at the side</p> <p><b>With the order please indicate the exact glass thickness!</b></p> <p>Weight in kg:                      Aluminum 0.528                      Brass 0.654                      Stainless steel 0.636</p>	<p>10 mm                      13 - 19 mm</p>	<p><b>*03.120</b>  <b>03.282</b></p>
	<p><b>PT 30 UNIVERSAL</b>  <b>Overpanel patch</b>                      with stop insert</p> <p><b>With the order please indicate the exact glass thickness!</b></p> <p>Weight in kg:                      Aluminum 0.528                      Brass 0.654                      Stainless steel 0.580</p>	<p>10 mm                      13 - 19 mm</p>	<p><b>*03.420</b>  <b>03.482</b></p>
	<p><b>PT 30 UNIVERSAL</b>  <b>Overpanel patch</b>                      with blank insert</p> <p><b>With the order please indicate the exact glass thickness!</b></p> <p>Weight in kg:                      Aluminum 0.519                      Brass 0.645                      Stainless steel 0.571</p>	<p>10 mm                      13 - 19 mm</p>	<p><b>*03.421</b>  <b>03.484</b>                      not illustrated</p>

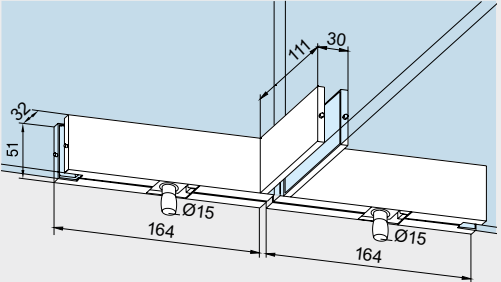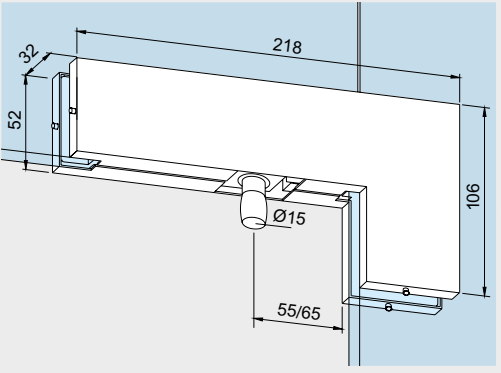\* Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 232.





	Product description	Glass thickness	Art. No.
	<p><b>Fixing plate for overpanel patch PT 30 UNIVERSAL</b></p> <p>Weight in kg:                      Aluminum 0.016                      Brass 0.038</p> <p>Stainless steel not available, satin chrome on brass supplied.</p>		<b>03.128</b>
	<p><b>Wall anchor with thread M 8 for overpanel patch PT 30</b></p> <p>Weight in kg: 0.040</p>		<b>01.133</b>
	<p><b>Threaded rod M 8 with plug for overpanel patch PT 30</b></p> <p>Weight in kg: 0.032</p>		<b>01.134</b>
	<p><b>PT 51 UNIVERSAL Double overpanel fitting with fin fitting on one side and 2 pins 15 mm diameter</b>                      Usable for glass thicknesses up to 12 mm. If thicker glasses are required, please talk to our Application Engineering people.</p> <p>Weight in kg:                      Aluminum 1.299                      Stainless steel 1.576</p>	10 mm	<b>03.160</b>
	<p><b>PT 40 UNIVERSAL Patch for overpanel and sidelight with pivot 15 mm Ø</b></p> <p>Weight in kg:                      Aluminum 0.755                      Brass 0.958                      Stainless steel 0.937</p> <p><b>With the order please indicate the exact glass thickness!</b></p>	10 mm 13 - 19 mm	<b>*03.140</b> <b>03.283</b> not illustrated

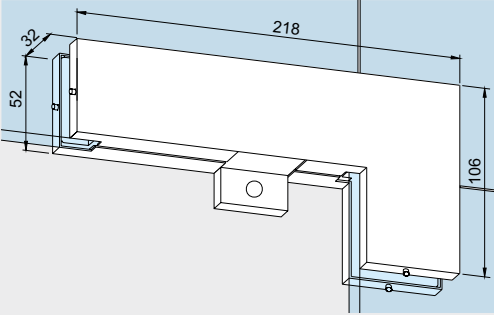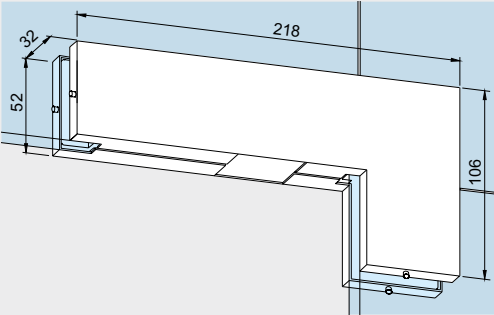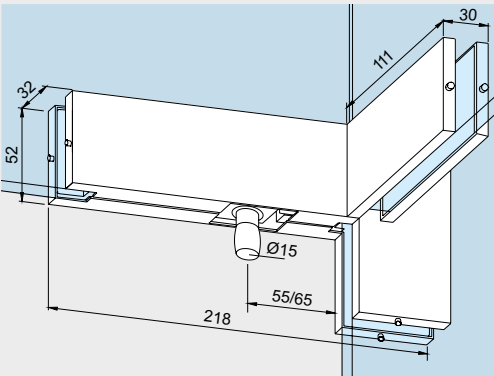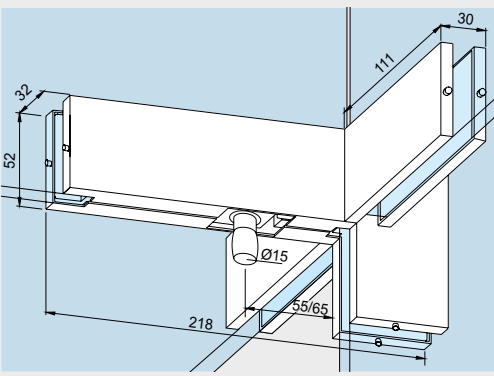\* Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 232.

	Product description	Glass thickness	Art. No.
	<b>PT 40 UNIVERSAL</b> <b>Patch for overpanel and sidelight</b> with stop insert	10 mm 13 - 19 mm	<b>*03.440</b> <b>03.483</b> not illustrated
	With the order please indicate the exact glass thickness!  Weight in kg: Aluminum 0.755 Brass 0.958 Stainless steel 0.937		
	<b>PT 40 UNIVERSAL</b> <b>Patch for overpanel and sidelight</b> with blank insert	10 mm 13 - 19 mm	<b>*03.441</b> <b>03.485</b> not illustrated
	With the order please indicate the exact glass thickness!  Weight in kg: Aluminum 0.746 Brass 0.949 Stainless steel 0.928		
	<b>PT 41 UNIVERSAL</b> <b>Patch for overpanel and sidelight</b> with fin fitting inside, with pivot 15 mm Ø	10 mm	<b>**03.162/</b> <b>03.163</b>
	<b>PT 41 UNIVERSAL</b> <b>Patch for overpanels and sidelight</b> with stop insert	10 mm	<b>**03.262/</b> <b>03.263</b> not illustrated
	<b>PT 41 UNIVERSAL</b> <b>Patch for overpanels and sidelight</b> with stop insert	10 mm	<b>**03.264/</b> <b>03.265</b> not illustrated
	Weight in kg: Aluminum 0.952 Stainless steel 1.197		
	<b>PT 41 UNIVERSAL</b> <b>Patch for overpanels and sidelight</b> with fin fitting on both sides, with pivot 15 mm Ø	10 mm	<b>03.161</b>
	Weight in kg: Aluminum 1.149 Stainless steel 1.457		




\* Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 232.

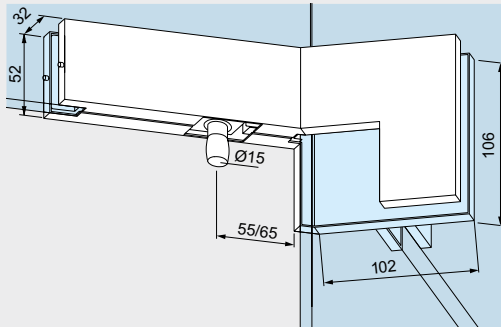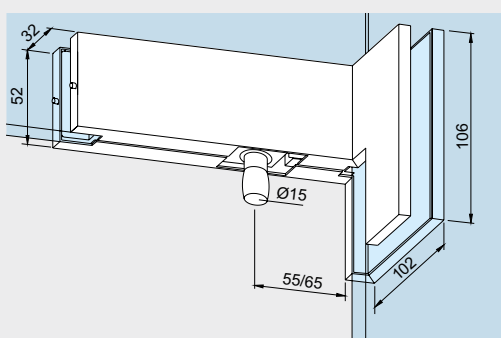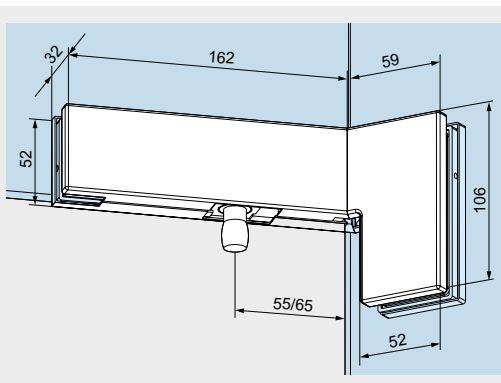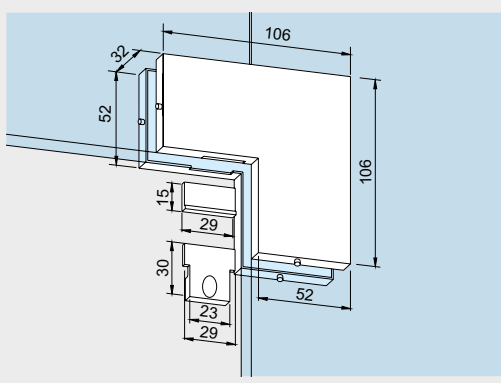\*\* Left hand fin (illustration shows left hand) / right hand fin. Left or right hand are determined by view from outside.

	Product description	Glass thickness	Art. No.
	<p><b>PT 41 UNIVERSAL</b>  <b>Patch for overpanel and sidelight,</b>                      with fin fitting inside,                      with pivot 15 mm Ø                      angle 135° - 179°</p> <p><b>Glass preparation on request, please send your drawing.</b></p> <p>Weight in kg:                      Aluminum 1.200                      Stainless steel 1.522</p>		<p><b>**03.168/03.169</b></p>
	<p><b>PT 42 UNIVERSAL</b>  <b>Overpanel patch for single action doors</b>                      with angled connector inside,                      pivot 15 mm, angle 90°</p>		<p><b>**03.164/03.165</b></p>
	<p><b>PT 42 UNIVERSAL</b>  <b>Overpanel patch for double or single action doors</b>                      with angled connector inside, pivot 15 mm,                      angle 135°</p> <p>angle 105°-134° / 136°-179°                      (Glass preparation on request)</p> <p>Weight in kg:                      Aluminum 0.882                      Stainless steel 1.059</p>		<p><b>**03.464/03.465</b></p> <p><b>**03.166/03.167</b>                      not illustrated</p>
	<p><b>PT 60/61 UNIVERSAL</b>  <b>Connector</b>                      for overpanel and sidelight, for double or single action doors with one stop insert and two blank inserts, also suitable for 12 mm glass thickness.</p> <p><b>With the order please indicate the exact glass thickness!</b></p> <p>Weight in kg:                      Aluminum 0.343                      Brass 0.461                      Stainless steel 0.436</p>	<p>10 mm                      13 - 19 mm</p>	<p><b>*03.150</b>  <b>03.452</b>                      not illustrated</p>





\* Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 232.

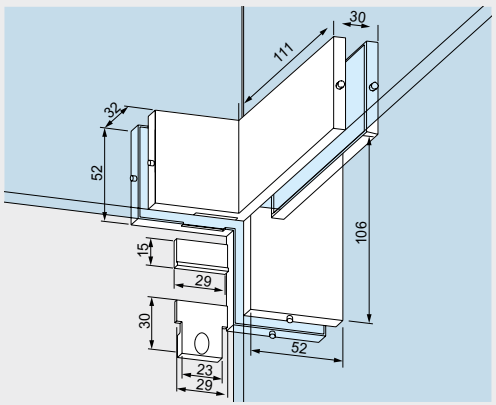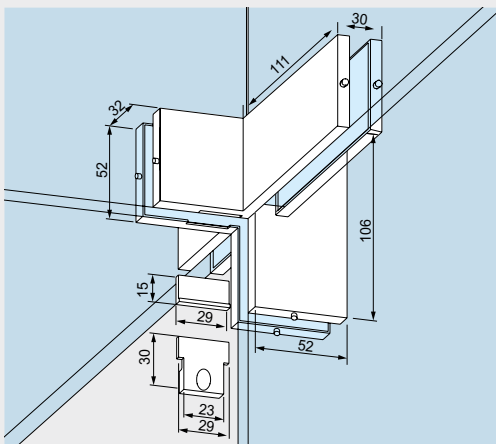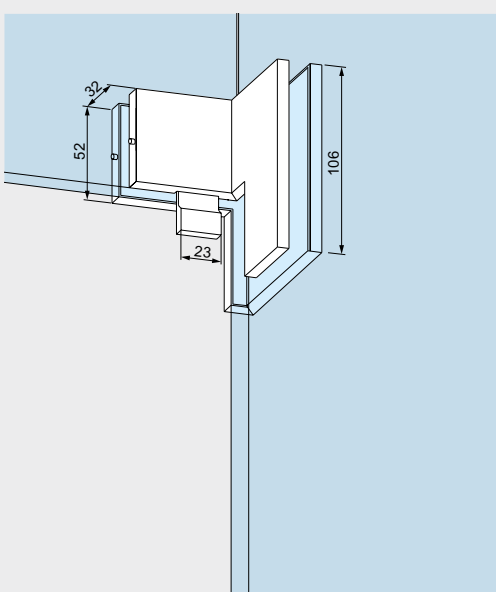\*\* Left hand fin (illustration shows left hand) / right hand fin. Left or right hand are determined by view from outside.





	Product description	Glass thickness	Art. No.
	<p><b>PT 60/61 UNIVERSAL Connector</b> for overpanel and sidelight, for double or single action doors, with fin fitting inside, with one stop insert and two blank inserts</p> <p>Also suitable for 12 mm glass thickness.</p> <p>Weight in kg: Aluminum 0.448 Stainless steel 0.600</p>		<p><b>**03.158/03.157</b></p>
	<p><b>PT 60/61 UNIVERSAL Connector</b> for overpanel and sidelight, for double or single action doors, with fin fitting on both sides, with one stop insert and two blank inserts</p> <p>Weight in kg: Aluminum 0.645 Stainless steel 0.860</p>		<p><b>*03.159</b></p>
	<p><b>PT 60/61 UNIVERSAL Connector</b> for overpanel and sidelight for single action doors, with stop inside, angle 90°</p> <p>Weight in kg: Aluminum 0.251 Stainless steel 0.344</p> <p><b>PT 60/61 UNIVERSAL</b> for double or single action doors, with one stop insert and two blank inserts, angle 135°</p> <p>angle 105°–134° / 136°–179° (specify angle with order)</p> <p>Weight in kg: Aluminum 0.343 Stainless steel 0.435</p> <p><b>Glass preparation on request.</b></p>		<p><b>*03.454/ *03.455</b></p> <p><b>*03.450/ *03.451</b> not illustrated</p> <p><b>*03.156/ *03.155</b></p>

\* Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 232.


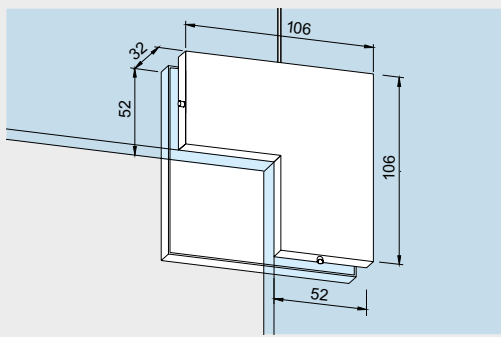
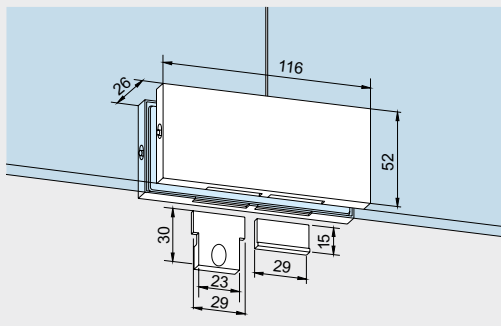
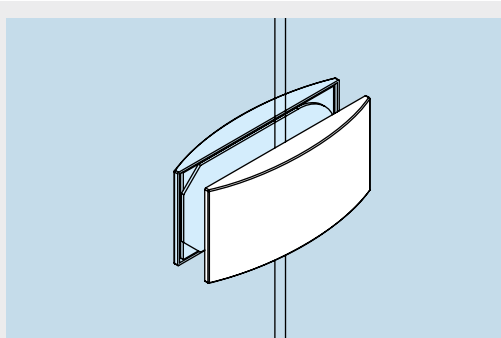
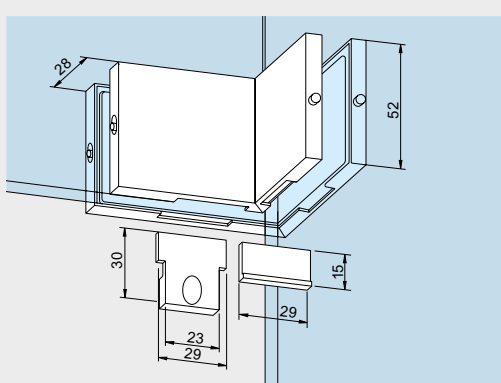
\*\* Left hand fin (illustration shows left hand) / right hand fin. Left or right hand are determined by view from outside.

	Product description	Glass thickness	Art. No.
	<p><b>PT 62 UNIVERSAL Connector</b> for overpanel and sidelight, with stop</p> <p>Weight in kg: Aluminum 0.475 Stainless steel 0.670</p>		<b>03.173</b>
	<p><b>PT 70 UNIVERSAL Overpanel connector</b> with two stop inserts and two blank inserts, also suitable for 12 mm glass thickness</p> <p><b>With the order please indicate the exact glass thickness!</b></p> <p>Weight in kg: Aluminum 0.272 Stainless steel 0.335</p>	13 - 19 mm	<b>*01.150</b> <b>01.158</b> not illustrated
	<p><b>Overpanel-sidelight connector</b></p> <p>Weight in kg: Aluminum 0.146</p>		<b>12.536</b>
	<p><b>PT 70 UNIVERSAL Connector</b> with two stop inserts and two blank inserts, angle 90°</p> <p>angle 135°</p> <p>angle 105° – 134° / 136° – 179° (glass preparation on request)</p> <p>Weight in kg: Aluminum 0.272 ER 0.335</p>		<b>*01.156</b>  <b>*01.157</b> not illustrated  <b>*01.155</b>

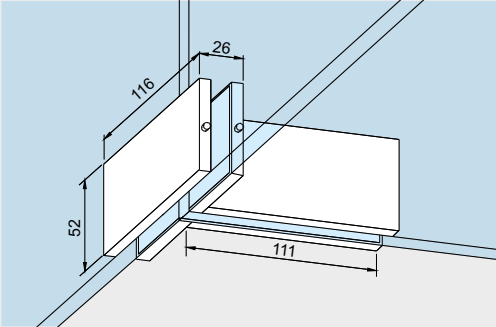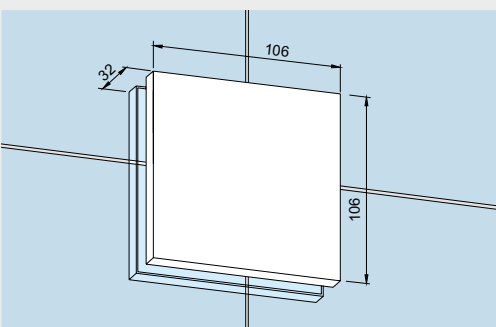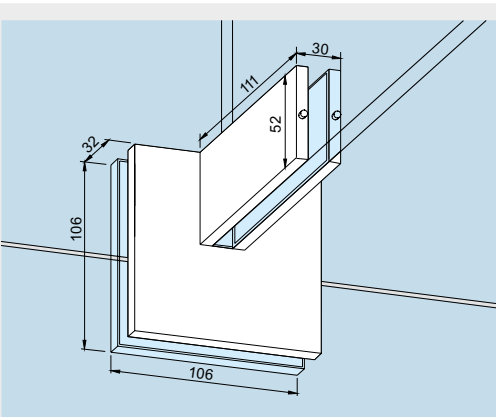
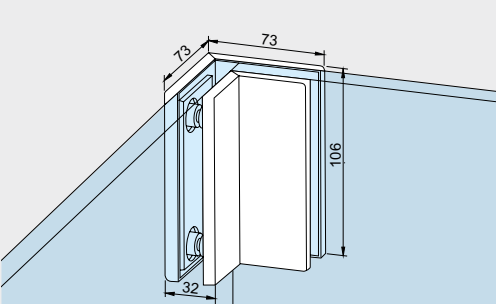
\* Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 232.

	Product description	Glass thickness	Art. No.
	<p><b>PT 71 UNIVERSAL</b>  <b>Overpanel connector</b>                      with fin fitting</p> <p>Weight in kg:                      Aluminum 0.458                      Stainless steel 0.608</p>		<p><b>01.161</b></p>
	<p><b>PT 80 UNIVERSAL</b>  <b>Connector</b></p> <p><b>With the order please indicate the exact glass thickness!</b></p> <p>Weight in kg:                      Aluminum 0.555                      Stainless steel 0.780</p>	<p>13 - 19 mm</p>	<p><b>*03.170</b>   <b>03.472</b>                      not illustrated</p>
	<p><b>PT 81 UNIVERSAL</b>  <b>Connector</b>                      with fin fitting</p> <p>Weight in kg:                      Aluminum 0.784                      Stainless steel 1.065</p>		<p><b>03.175</b></p>
	<p><b>PT 80 UNIVERSAL</b>  <b>Connector</b>                      angle 90°</p> <p>Weight in kg:                      Aluminum 0.467                      Stainless steel 0.540</p>		<p><b>03.171</b></p>

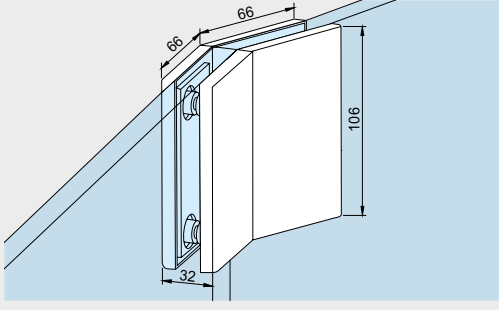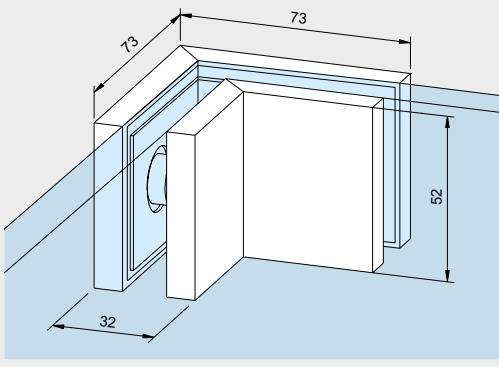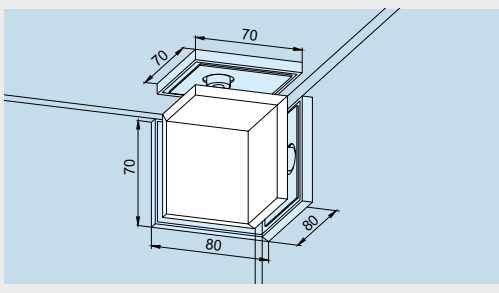
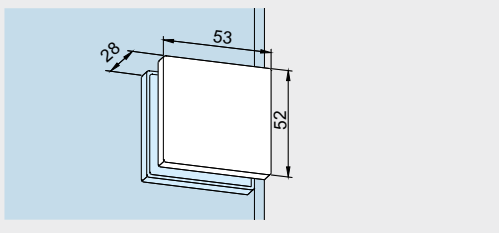
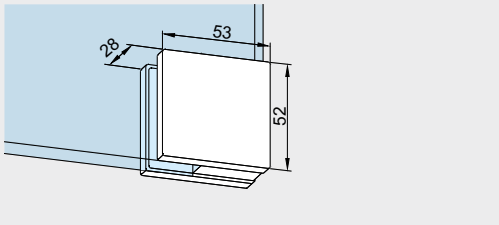
\* Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 232.

	Product description	Glass thickness	Art. No.
	<p><b>PT 80 UNIVERSAL Connector, angle 135°</b></p> <p>angle 91°–134°/136°–179° (Please specify angle with order)</p> <p>Weight in kg: Aluminum 0.472 Stainless steel 0.541</p>		<p><b>03.172</b></p> <p><b>03.178</b> not illustrated</p>
	<p><b>PT 80 UNIVERSAL Connector, shortened, angle 90°</b></p> <p>angle 91°–134°/136°–179° (Please specify angle with order)</p> <p>Weight in kg: Aluminum 0.236 Stainless steel 0.270</p>		<p><b>03.470</b></p> <p><b>03.179</b> not illustrated</p>
	<p><b>Three way box corner connector angle 90°</b></p> <p>Showcase fitting. The fitting has no load-bearing function and therefore comes without approval certification for systems with a glass cover.</p> <p>Weight in kg: Aluminum 0.099 Stainless steel 0.131</p>		<p><b>03.198</b></p>
	<p><b>PT 90 UNIVERSAL Screw on fitting</b></p> <p>Weight in kg: Aluminum 0.120 Brass 0.160 Stainless steel 0.155</p>	<p>13.5–19 mm</p>	<p><b>07.021</b></p> <p><b>07.210</b></p>
	<p><b>PT 91 UNIVERSAL Corner fitting</b></p> <p>Weight in kg: Aluminum 0.120 Brass 0.160 Stainless steel 0.155</p>	<p>13.5–19 mm</p>	<p><b>07.023</b></p> <p><b>07.211</b></p>

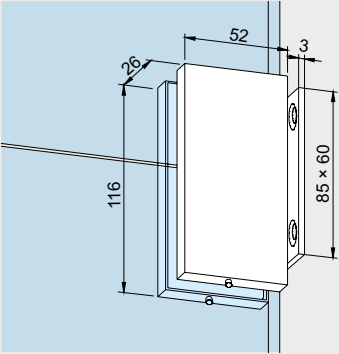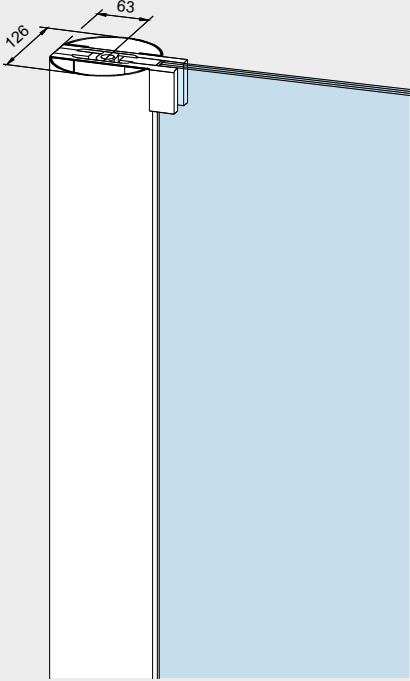




	Product description	Glass thickness	Art. No.
	<p><b>Side connector</b> with fixing plate</p> <p>Also suitable for 8 mm glass thickness.</p> <p>Weight in kg: Aluminum 0.313 Stainless steel 0.376</p> <p><b>Gasket</b></p> <p>Please indicate glass thickness and Art. No. of fitting.</p>	<p>10, 12 mm</p> <p>8 mm</p> <p>12 mm</p>	<p><b>01.153</b></p> <p>not illustrated</p> <p><b>01.901</b></p>
	<p><b>Aluminum round profile</b> for pinch free doors with 65 mm pivot point, consisting of 2 halves, prepared for UNIVERSAL fittings or door rails (76.5 mm or 100 mm).</p> <p>Please indicate:</p> <ul style="list-style-type: none"> <li>Panel height (max. 2,500 mm, higher dimension on request)</li> <li>Required preparation of the profile for top and bottom fittings</li> </ul> <p><b>Aluminum round profile,</b> as above, stock length 6,000 mm (unprepared)</p> <p><b>Aluminum round profile,</b> as above, stock length 3,000 mm (unprepared)</p> <p><b>Aluminum round profile,</b> as above, stock length 2,800 mm (unprepared)</p> <p>Weight in kg/m: Aluminum 4.744</p>		<p><b>03.380</b></p> <p><b>03.381</b></p> <p><b>03.382</b></p> <p><b>03.383</b></p>

# Locks, complete for 10 mm glass thickness

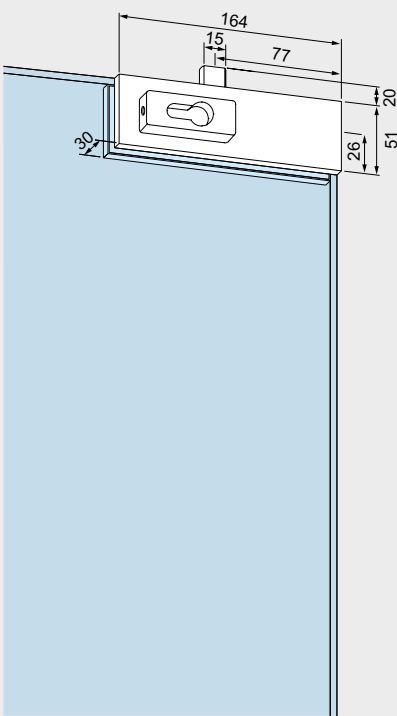
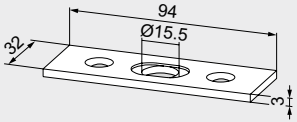
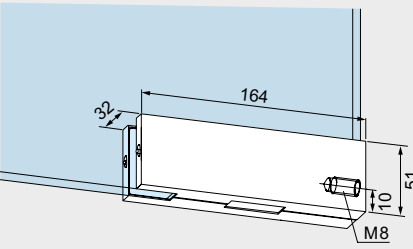
	Product description	Glass thickness	Art. No.
	<p><b>US 10 UNIVERSAL corner lock,</b> prepared for Europrofile cylinder, single throw, bolt projection 20 mm, with security rosettes on both sides, 14 mm thick.</p> <p>Lock insert:</p> <ul style="list-style-type: none"> <li>• high corrosion resistance according to EN 1670, class 4</li> <li>• with regard to type-test according to DIN 18251, class 3**</li> </ul> <p><b>With the order please indicate the exact glass thickness!</b></p> <p>prepared for KABA</p> <p>For half profile cylinder Left hand top/ right hand bottom</p> <p>Left hand bottom/right hand top</p> <p>Weight in kg: Aluminum 0.942 Brass 1.061 Stainless steel 1.053</p>	<p>10 mm 13, 15, 19 mm</p>	<p><b>03.206</b> <b>03.285</b></p> <p><b>03.340</b></p> <p><b>03.288</b></p> <p><b>03.287</b></p>
	<p><b>Lock keeper plate, stainless steel,</b> two parts, adjustable ± 5 mm</p> <p>Weight in kg: 0.048</p> <p>Alternative (not illustrated): <b>Floor sockets</b></p>		<p><b>05.190</b></p> <p><b>05.192</b> <b>05.193</b> <b>05.194</b></p>
	<p><b>GK 30 UNIVERSAL Single overpanel</b> strike box with threaded hole at side, to suit US 10 corner lock</p> <p><b>With the order please indicate the exact glass thickness!</b></p> <p>Weight in kg: Aluminum 0.418 Brass 0.555 Stainless steel 0.536</p> <p><b>GK 30 UNIVERSAL with stop</b></p> <p>Weight in kg: Aluminum 0.463 Stainless steel 0.597</p>	<p>13, 15, 19 mm</p>	<p><b>03.230</b> <b>03.295</b> not illustrated</p> <p><b>*03.234/03.235</b> not illustrated</p>

\* Left or right hand are determined by view from outside.

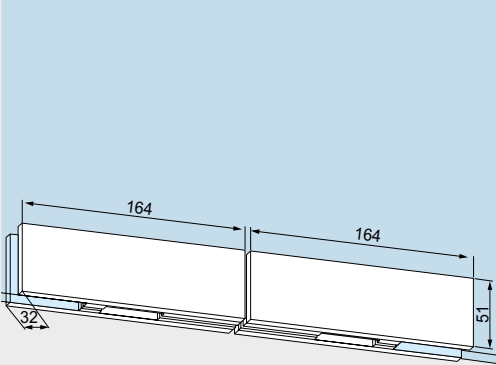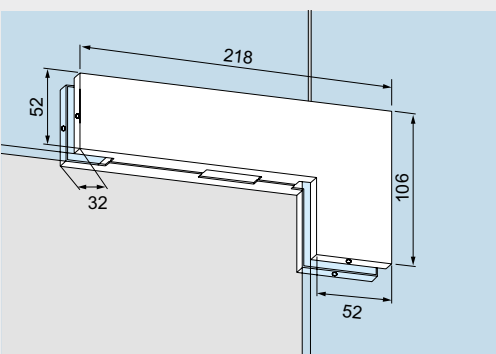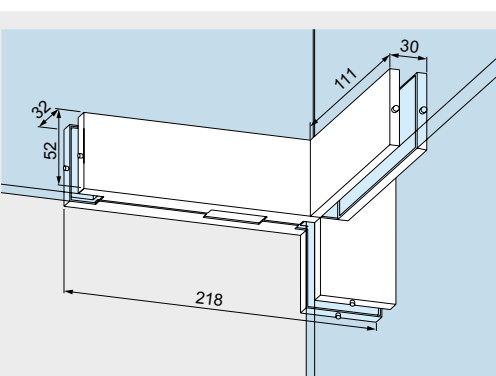
\*\* Extract from DIN 18251, class 3: Type-test with 50,000 locking bolt operating cycles. Furthermore the lock was tested successfully by a neutral testing institute with 100,000 locking bolt operating cycles.

	Product description	Glass thickness	Art. No.
	<p><b>GK 20 UNIVERSAL</b>  <b>Double overpanel</b>                      strike box to suit US 10 corner lock,                      consisting of two GK 30 with threaded                      connecting bolt</p> <p><b>Weight in kg:</b>                      Aluminum 0.844                      Brass 1.096                      Stainless steel 0.948</p> <p><b>GK 20 UNIVERSAL with stop</b></p> <p>Weight in kg:                      Aluminum 1.490                      Brass 4.465</p> <p>Weight in kg:                      Aluminum 0.709                      Brass 1.035                      Stainless steel 1.010</p> <p>Can be used for glass thickness of up to max. 12 mm. If you wish to use thicker glasses, please get in touch with our Application Engineering department beforehand.</p>		<p><b>03.245</b></p> <p><b>03.247</b>                      not illustrated</p>
	<p><b>GK 40 UNIVERSAL</b>  <b>Corner overpanel strike box</b>                      to suit US 10 corner lock</p> <p><b>GK 40 UNIVERSAL with stop</b></p> <p>Weight in kg:                      Aluminum 0.754                      Brass 1.035                      Stainless steel 1.010</p>		<p><b>03.250</b></p> <p><b>*03.254/03.255</b>                      not illustrated</p>
	<p><b>GK 41 UNIVERSAL</b>  <b>Strike box</b>                      to suit US 10 corner lock,                      with fin fitting</p> <p>Weight in kg:                      Aluminum 0.906                      Stainless steel 1.270</p>		<p><b>*03.194/03.193</b></p>

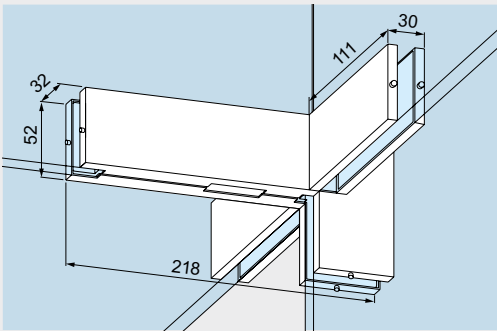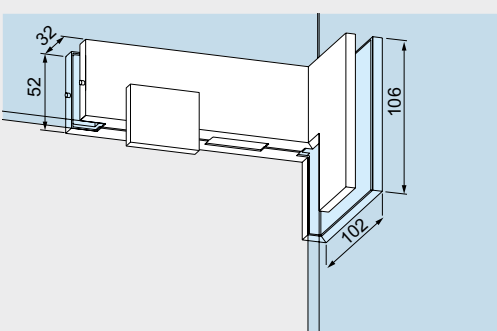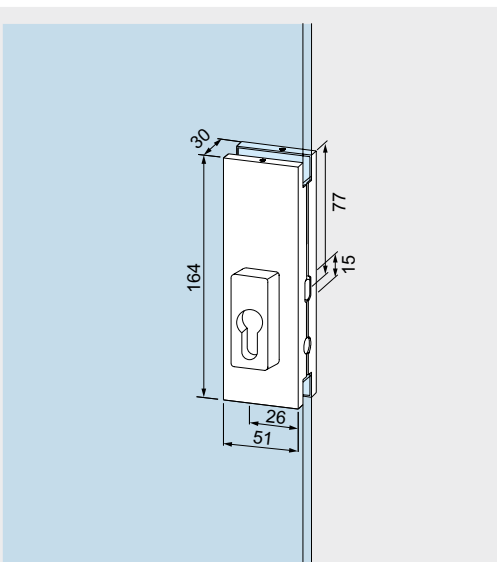\* Order of Art. No.: left hand fin / right hand fin – determined by view from outside. (Illustration shows left hand)

	Product description	Glass thickness	Art. No.
	<p><b>GK 41 UNIVERSAL</b>  <b>Strike box</b>                      with fin fitting on both sides</p> <p>Weight in kg:                      Aluminum 1.103                      Stainless steel 1.411</p>		<p><b>03.195</b></p>
	<p><b>GK 42 UNIVERSAL</b>  <b>Strike box</b>                      to suit US 10 corner lock,                      angle 90°, with stop inside</p> <p>angle 135°, without stop                      (Glass preparation on request)</p> <p>Weight in kg:                      Aluminum 0.910                      Stainless steel 1.247</p>		<p><b>*03.274/03.275</b></p> <p><b>*03.276/03.277</b>                      not illustrated</p>
	<p><b>US 20 UNIVERSAL</b>  <b>Centre lock,</b>                      prepared for Europrofile cylinder,                      single throw, bolt projection 20 mm,                      with security rosettes 14 mm thick.</p> <p>Lock insert:</p> <ul style="list-style-type: none"> <li>• high corrosion resistance according to EN 1670, class 4</li> <li>• with regard to type-test according to DIN 18251, class 3**</li> </ul> <p><b>With the order please indicate the exact glass thickness!</b></p> <p>Prepared for KABA</p> <p>Prepared for half profile cylinder</p> <p>Weight in kg:                      Aluminum 0.942                      Brass 1.061                      Stainless steel 1.053</p>	<p>10 mm</p> <p>13, 15, 19 mm</p>	<p><b>3.215</b></p> <p><b>03.286</b>                      not illustrated</p> <p><b>03.345</b></p> <p><b>*03.290/03.289</b></p>

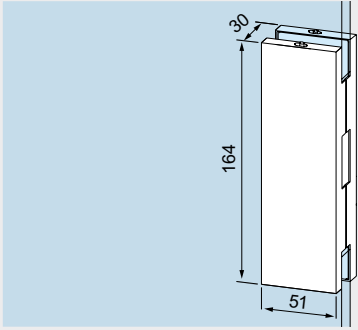\* Left or right hand are determined by view from outside. (illustration shows left hand)  
 \*\* Extract from DIN 18251, class 3: Type-test with 50,000 locking bolt operating cycles. Furthermore the lock was tested successfully by a neutral testing institute with 100,000 locking bolt operating cycles.

	Product description	Glass thickness	Art. No.
	<b>GK 50 UNIVERSAL</b> <b>Strike box</b> to suit US 20 centre lock	10 mm	<b>03.224</b>
	<p style="color: red;"><b>With the order please indicate the exact glass thickness!</b></p> Weight in kg: Aluminum            0.602 Brass                    0.730 Stainless steel       0.727	13, 15, 19 mm	<b>03.296</b>

# UNIVERSAL pinch free

## Completely pinch free double swing doors

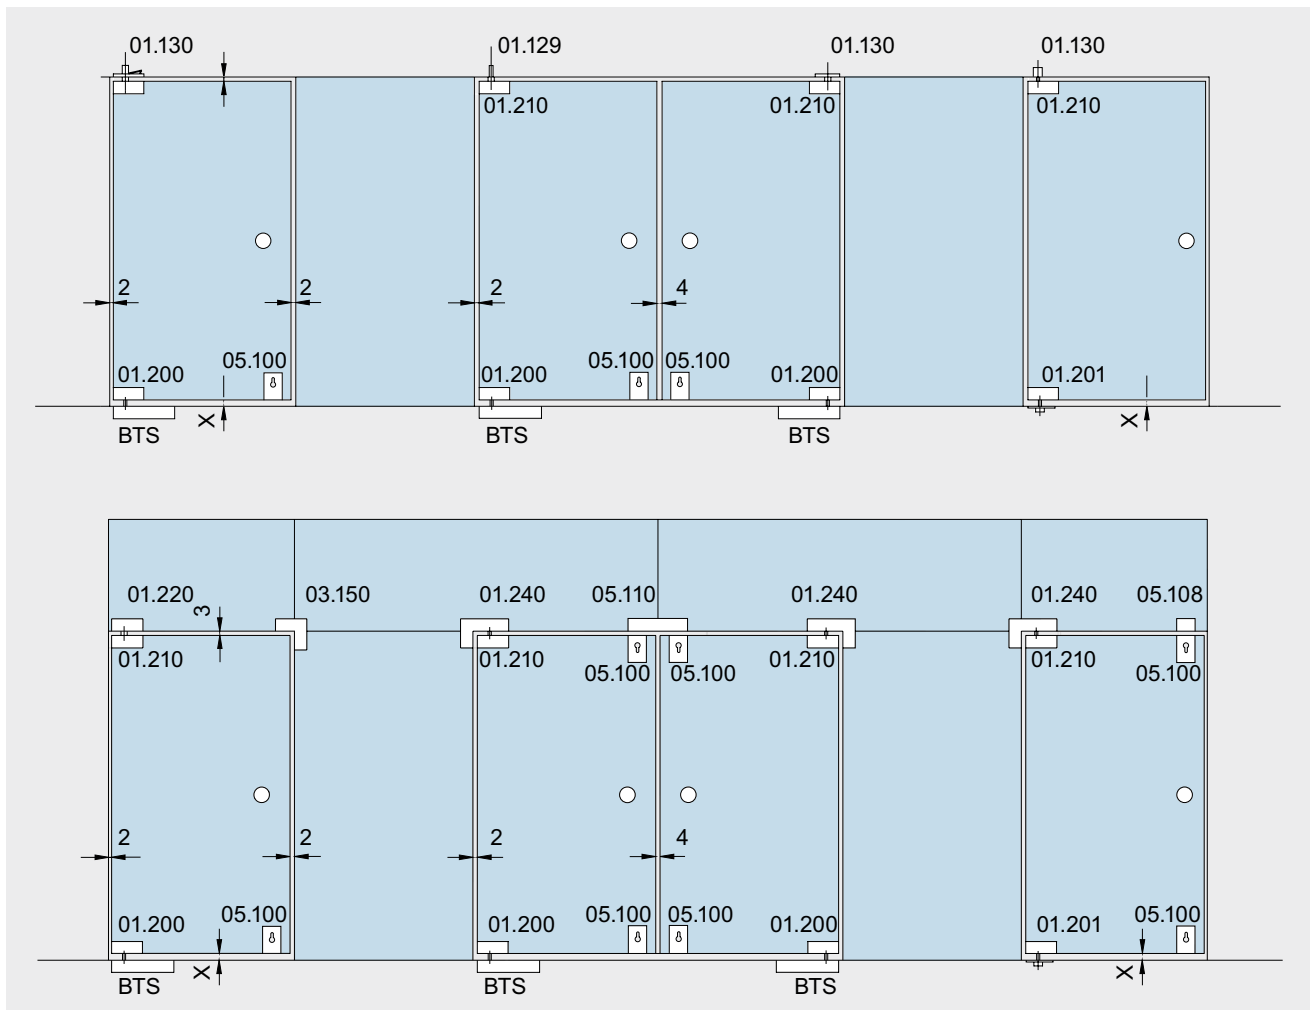
UNIVERSAL pinch free patch fittings with their 15 mm pivot point help to resolve this problem by means of the closeness of the pivot point to the frame. In order to eliminate finger traps completely, the special radiused edging strip should be used.

## Suitable for 10 mm and 8 mm glass thicknesses

UNIVERSAL pinch free corner patches are supplied as standard with gasket to suit 10 mm glass. For 8 mm glass, correspondingly thicker gasket is available.

## Type selection

**Toughened glass assemblies with patches for pinch free centre hung doors. All standard assembly types see page 42.**



BTS = Floor spring

X = 10 mm with Art. No. 01.200

X = see page 63 for Art. No. 01.201

## Maximum door weight and width for patch fittings

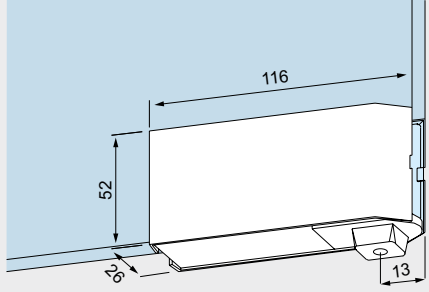
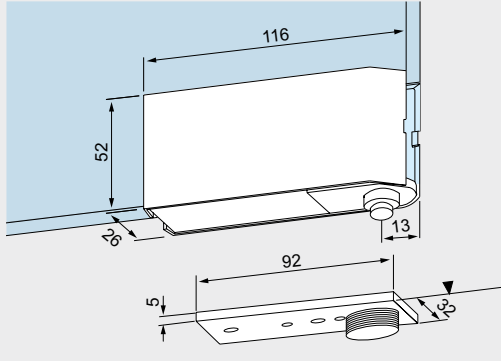
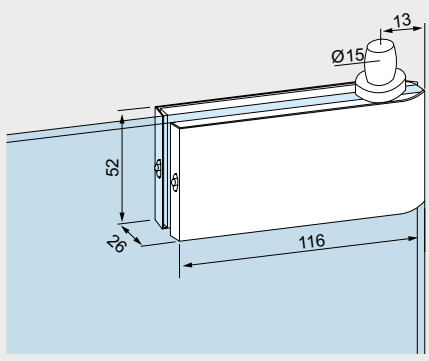
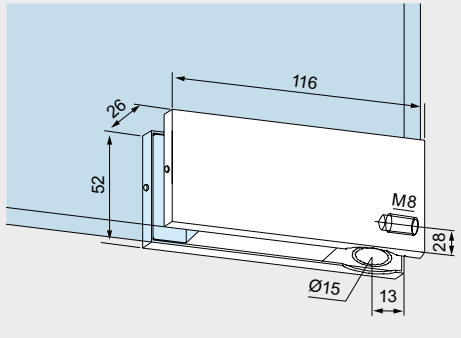
max. door weight: 80 kg  
 max. door width: 1,100 mm  
 For door weights up to 150 kg and widths up to 1,400 mm, door rails should be used.






## Torque for fixing screws

Screws M 6: 10 Nm (4 mm)\*  
 Screws M 6: 15 Nm (5 mm)\*  
 Screws M 8: 20 Nm (5 mm)\*

\*Allan key size

**Pinch free patch fittings with 15 mm pivot point,  
complete, for 10 mm glass thickness  
Accessories see page 224.**

	Product description	Art. No.
	<p><b>Bottom patch</b> complete with spindle insert for DORMA BTS floor spring</p> <p>Weight in kg: Aluminum 0.473 Stainless steel 0.535</p>	<p><b>01.200</b></p>
	<p><b>Bottom patch</b> complete with pivot insert and pivot bearing, with cover plate, height adjustable by 5 mm; floor clearance see page 79</p> <p>Weight in kg: Aluminum 0.560 Stainless steel 0.622</p>	<p><b>01.201</b></p>
	<p><b>Top patch fitting</b> with pivot pin 15 mm Ø</p> <p>Weight in kg: Aluminum 0.453 Stainless steel 0.526</p>	<p><b>01.210</b></p>
	<p><b>Overpanel patch</b> with 15 mm Ø pivot pin and threaded hole at side</p> <p>Weight in kg: Aluminum 0.262 Stainless steel 0.335</p>	<p><b>01.220</b></p>

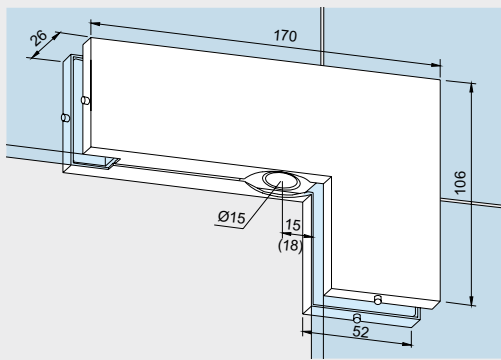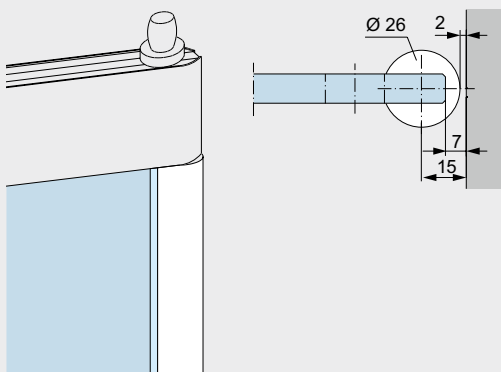	Product description	Glass thickness	Art. No.
	<p><b>Fixing plate</b> for overpanel patch EP</p> <p>Weight in kg: Aluminum 0.019 Brass 0.045</p> <p>Stainless steel not available, satin chrome on brass supplied.</p>		<b>01.127</b>
	<p><b>Wall anchor</b> with thread M 8 for overpanel patch</p> <p>Weight in kg: 0.040</p>		<b>01.133</b>
	<p><b>Threaded rod</b> M 8 with plug for overpanel patch PT 30</p> <p>Weight in kg: 0.032</p>		<b>01.134</b>
	<p><b>Patch for overpanel and sidelight</b> with plastic socket for 15 mm Ø pivot pin, pivot point 15 mm in combination with patch fittings</p> <p>Pivot point 18 mm in connection with door rails</p> <p>Weight in kg: Aluminum 0.542 Stainless steel 0.547</p>		<b>01.240</b>  <b>01.245</b> not illustrated
	<p><b>Radiused edging strip TSG*</b> for pinch free doors, (strip is clamped onto free glass edge), acrylic. Length: up to 4,500 mm please specify height</p> <p>Length: 2,250 mm</p> <p>Weight in kg/m: 0.408</p> <p>* Important information: If radiused edging strip is used, special glass preparation is necessary (see page 77).</p>	10 mm  10 mm	<b>01.231</b>  <b>01.230</b>



# Glass preparation fittings

**Product description**


**Art. No.**

**PT 10, PT 20, PT 22, PT 29, PT 30**


Top and bottom patches,  
overpanel patch

**Scale 1 : 2**

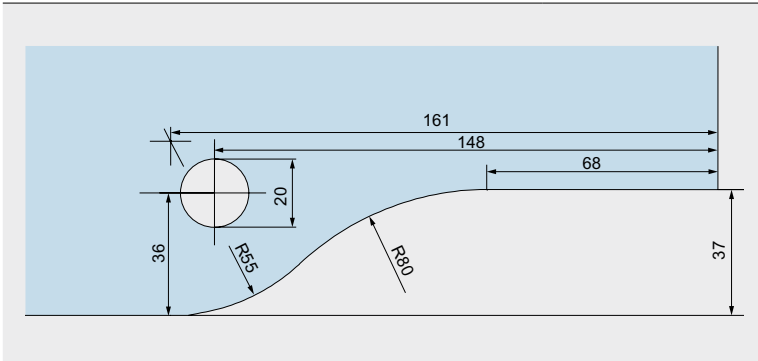- 03.100**
- 03.110**
- 03.114**
- 03.120**
- 03.212**
- 03.280**
- 03.281**
- 03.282**
- 03.420**
- 03.421**




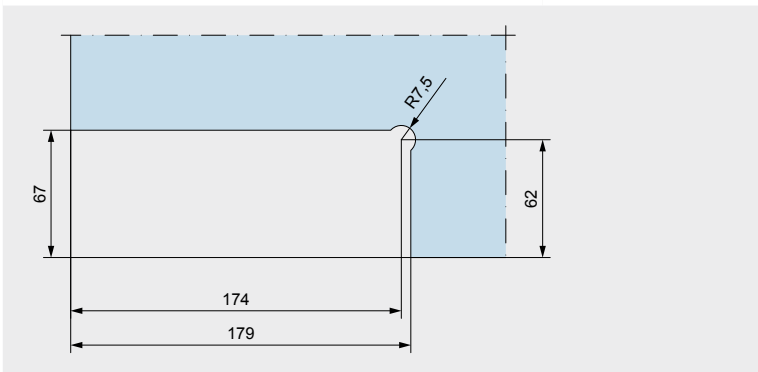**Glass preparation  
UNIVERSAL Motion**



**PT 30**

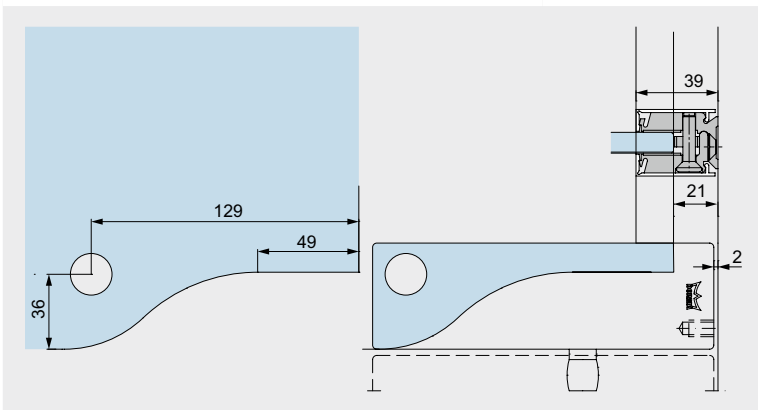Installation PT 30 with wall  
connection profile




**PT 40**

Patch for overpanel and sidelight




**Scale 1 : 2**


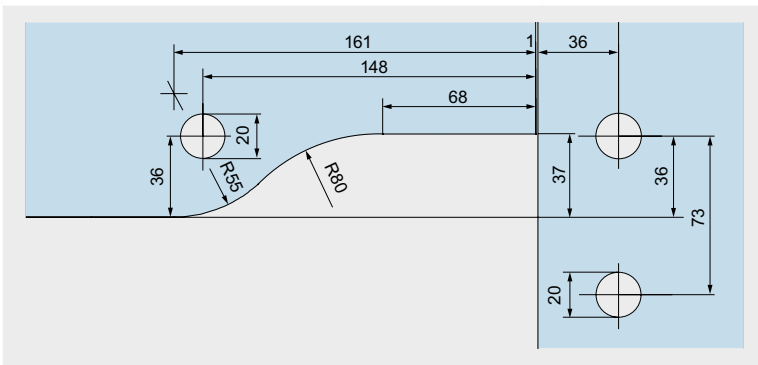
- 03.140**
- 03.283**
- 03.440**
- 03.441**



	Product description	Art. No.						
	<p><b>PT 41, GK 41</b> Patch for overpanel and sidelight with fin fitting inside</p> <p><b>Scale 1 : 2</b></p>	<p><b>03.162</b> <b>03.163</b> <b>03.193</b> <b>03.194</b></p>						
	<p><b>PT 42, GK 42</b> Angled connector 90°</p> <p><b>Scale 1 : 2</b></p>	<p><b>03.164</b> <b>03.165</b> <b>03.274</b> <b>03.275</b></p>						
	<p>Angled connectors with wider angles</p> <table border="1"> <thead> <tr> <th>Angle</th> <th>Distance</th> </tr> </thead> <tbody> <tr> <td>179° – 105°</td> <td>46 mm</td> </tr> <tr> <td>104° – 91°</td> <td>65 mm</td> </tr> </tbody> </table>	Angle	Distance	179° – 105°	46 mm	104° – 91°	65 mm	<p><b>03.166</b> <b>03.167</b> <b>03.464</b> <b>03.465</b> (not illustrated)</p>
Angle	Distance							
179° – 105°	46 mm							
104° – 91°	65 mm							

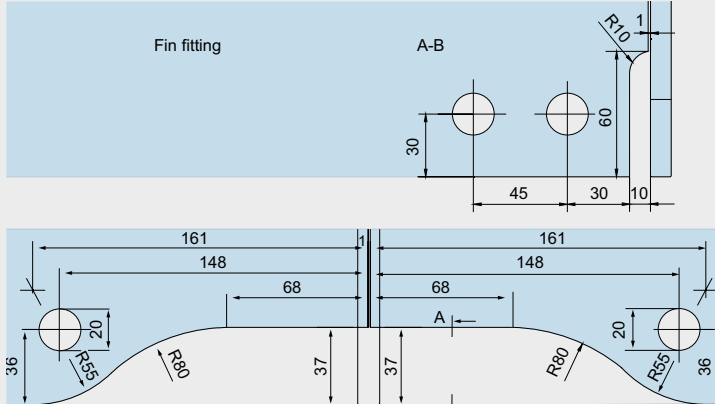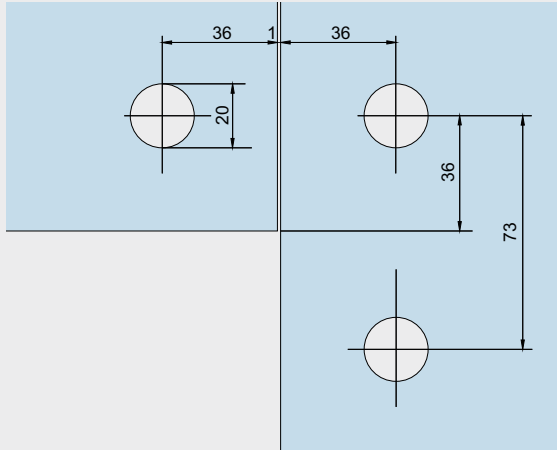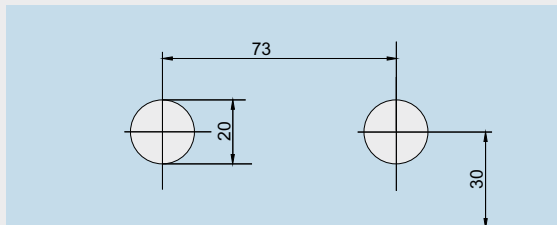Details as to glass preparation for angled connectors on demand.

	Product description	Art. No.
	<p><b>PT 51</b> Overpanel fin fitting for back to back doors</p> <p><b>Scale 1 : 2.5</b></p>	<p><b>03.160</b></p>
	<p><b>PT 60/61, PT 62</b> <b>Winkelverbindung</b> Connectors for overpanels and sidelights</p> <p><b>Scale 1 : 2</b></p> <p>Glass preparation for fin fitting see PT 81</p> <p>Glass preparation for fin fitting both sides see PT 81</p>	<p><b>03.150</b></p> <p><b>03.173</b></p> <p><b>03.157</b></p> <p><b>03.158</b></p> <p><b>03.159</b></p> <p><b>03.452</b></p>
	<p><b>PT 70</b> Overpanel connector</p> <p><b>Scale 1 : 2</b></p>	<p><b>01.150</b></p> <p><b>01.158</b></p>

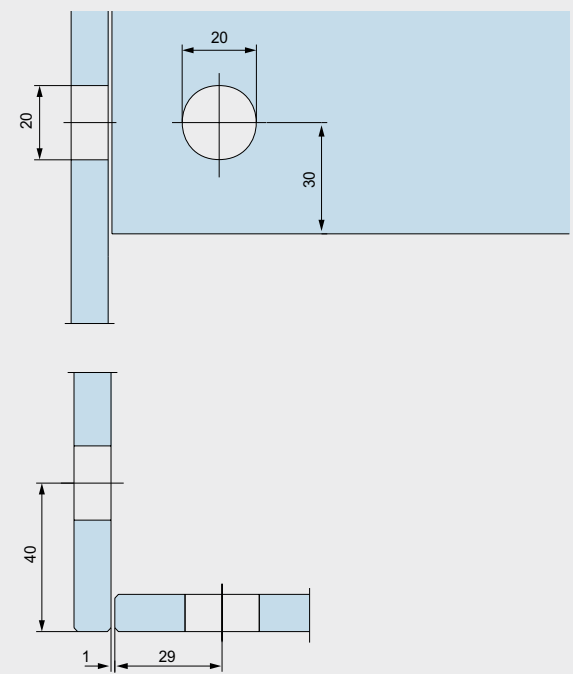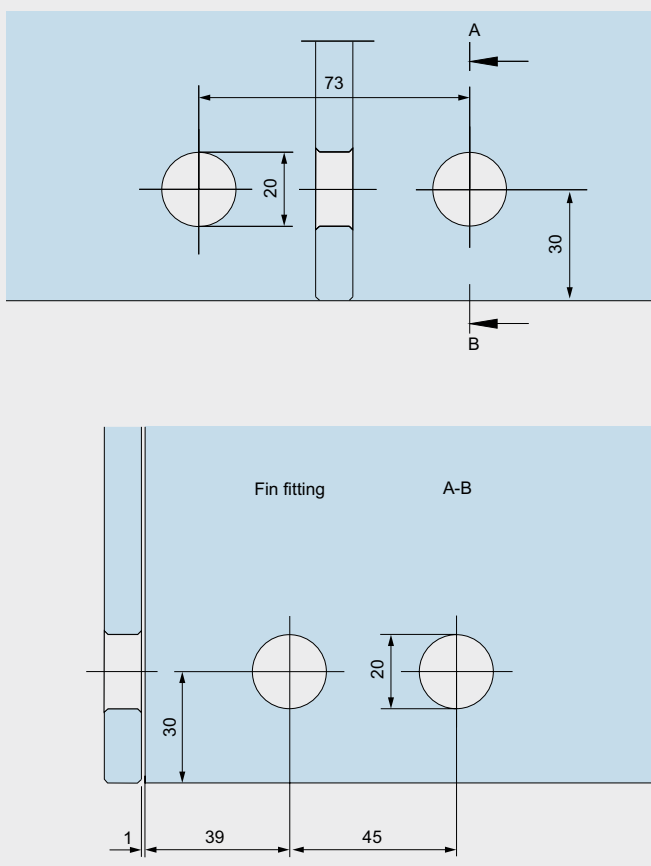	<b>Product description</b>	<b>Art. No.</b>
	<p><b>PT 70</b> Connectors for overpanels and sidelights, 90°</p> <p>Glass preparation examples for angles between 91° – 179° available on request.</p> <p><b>Scale 1 : 2</b></p>	<p><b>01.156</b></p>
	<p><b>PT 71</b> Overpanel connector with fin fitting</p> <p><b>Scale 1 : 2</b></p>	<p><b>01.161</b></p>



**Product description**

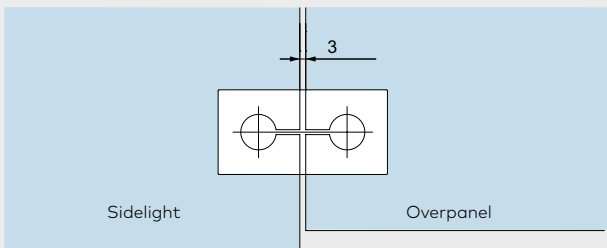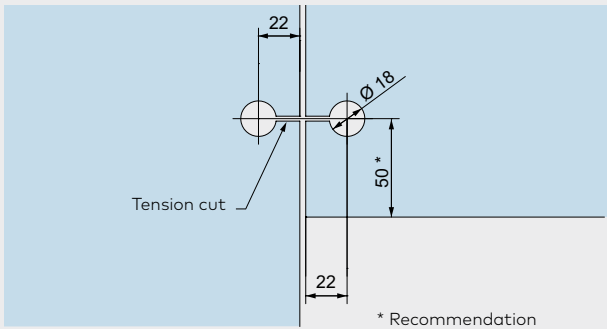**Art. No.**

**Overpanel-sidelight connector**

**12.536**


Weight in kg:  
Aluminum 0.146



**PT 80**  
Connector

**03.170**  
**03.472**

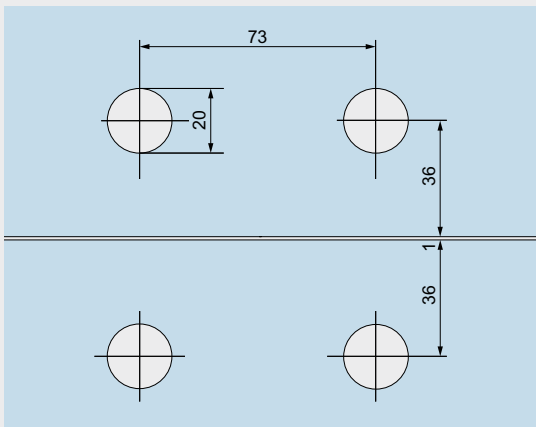
**Scale 1 : 2**







**PT 81**  
Connector with fin fitting





**03.175**

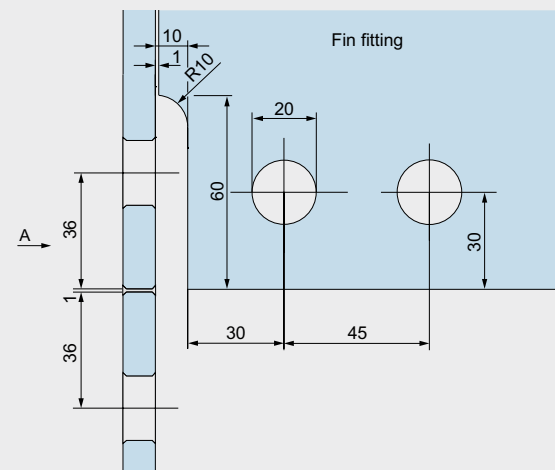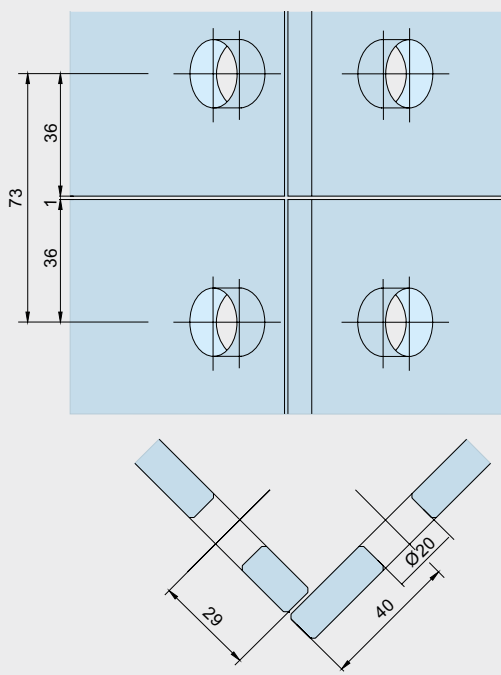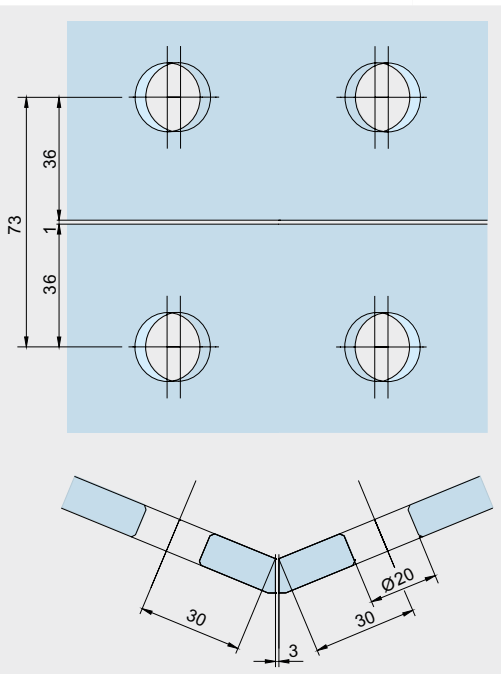**Scale 1 : 2**







	Product description	Art. No.
	<p><b>PT 80</b> Angled connector, 90°</p> <p>Glass preparation examples for angles between 91° – 134° / 136° – 179° available on request.</p> <p><b>Scale 1 : 2</b></p>	<p><b>03.171</b></p>
	<p><b>PT 80</b> Angled connector, 135°</p> <p>Glass preparation examples for angles between 91° – 134° / 136° – 179° available on request.</p> <p><b>Scale 1 : 2</b></p>	<p><b>03.172</b></p>

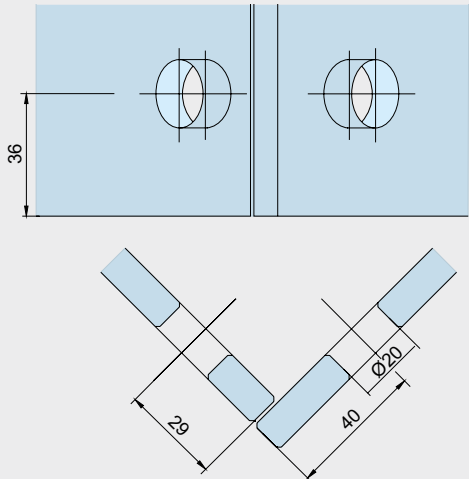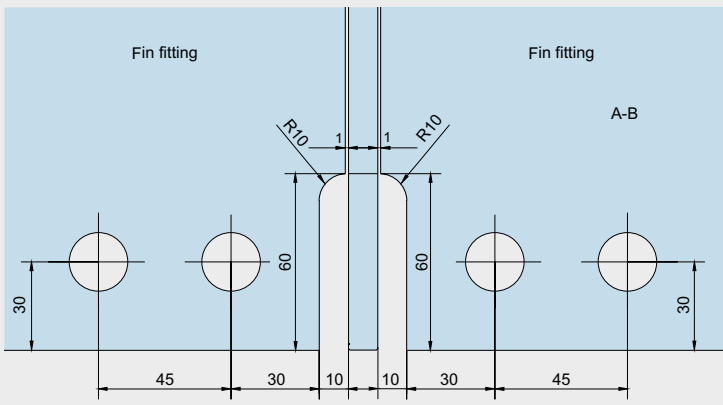
	Product description	Art. No.
	<p><b>PT 80 shortened</b>                      Angled connector, 90° shortened</p> <p>Glass preparation examples for angles between 91° – 134° / 136° – 179° available on request.</p> <p><b>Scale 1 : 2</b></p>	<p><b>03.470</b></p>
	<p><b>PT 41, GK 41</b>                      Patch for overpanel and sidelight with fin fitting on both sides</p> <p><b>Scale 1 : 2</b></p>	<p><b>03.161</b>  <b>03.195</b></p>

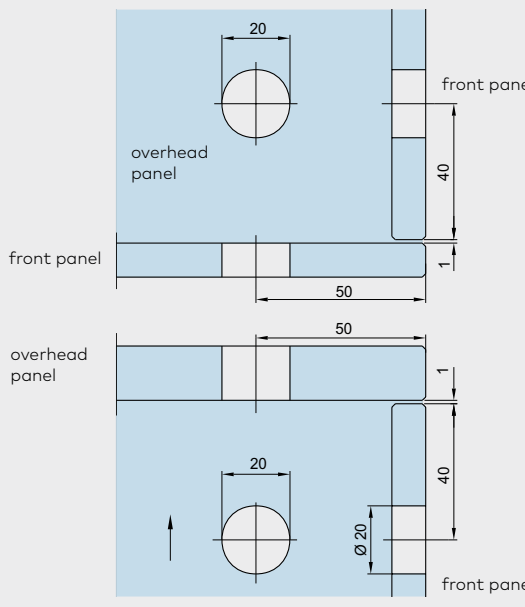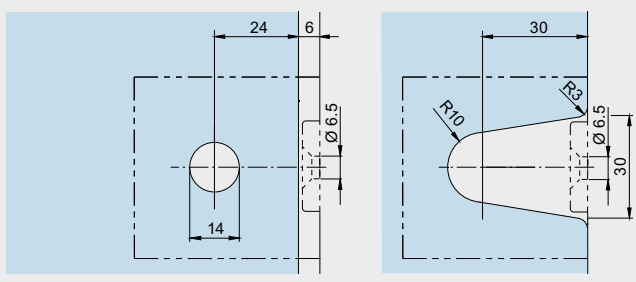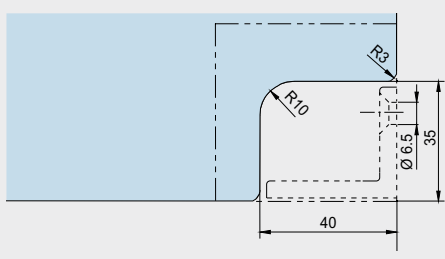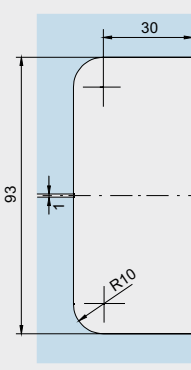	Product description	Art. No.
	<p><b>Three way box corner connector</b> angle 90°</p> <p><b>Scale 1 : 2</b></p> <p>Showcase fitting. The fitting has no load-bearing function and therefore comes without approval certification for systems with a glass cover.</p>	<p><b>03.198</b></p>
	<p><b>PT 90</b> Screw on fitting</p> <p><b>Scale 1 : 2</b></p>	<p><b>07.021</b></p>
	<p><b>PT 91</b> Corner fitting</p> <p><b>Scale 1 : 2</b></p>	<p><b>07.023</b></p>
	<p><b>Sidelight connector</b> with fixing plate</p> <p><b>Scale 1 : 2</b></p>	<p><b>01.153</b></p>





# Glass preparation locks

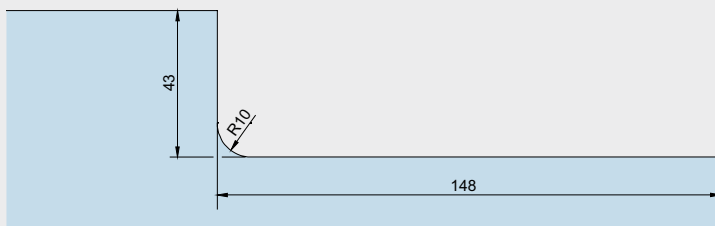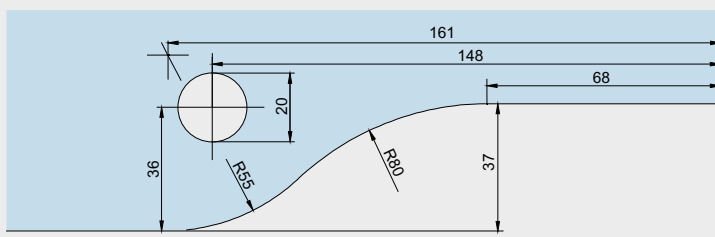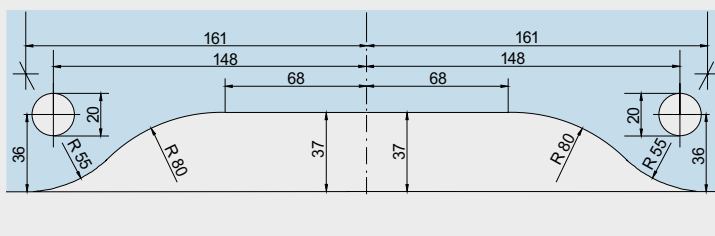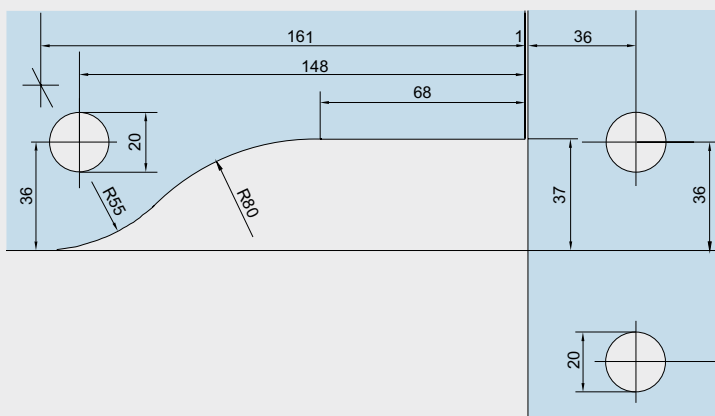	Product description	Art. No.
	<p><b>US 10</b> Corner locks</p> <p><b>Scale 1 : 2</b></p>	<p><b>03.206</b> <b>03.285</b> <b>03.287</b> <b>03.288</b> <b>03.340</b></p>
	<p><b>GK 30 (PT 30)</b> Single overpanel strike box</p> <p><b>Scale 1 : 2</b></p>	<p><b>03.230</b> <b>03.234</b> <b>03.235</b></p>
	<p><b>GK 20</b> Double overpanel strike box</p> <p><b>Scale 1 : 2</b></p>	<p><b>03.245</b> <b>03.247</b></p>
	<p><b>GK 40 (PT 40)</b> Corner overpanel strike box</p> <p><b>Scale 1 : 2</b></p>	<p><b>03.250</b> <b>03.254</b> <b>03.255</b></p>

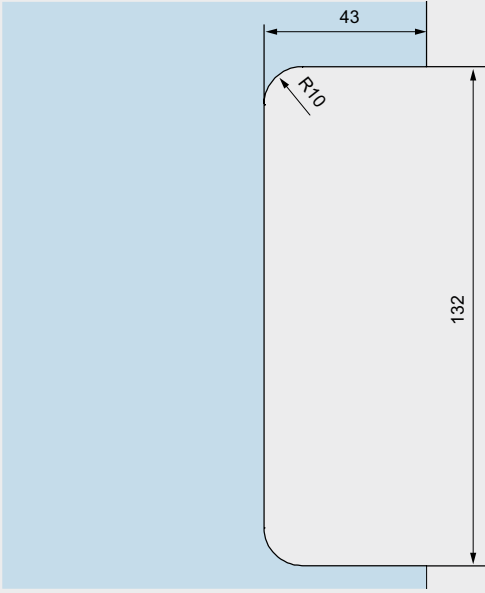
	Product description	Art. No.
	<p><b>US 20. GK 50</b> Centre lock</p>	<p><b>03.215</b> <b>03.345</b> <b>03.289</b> <b>03.290</b></p>
	<p>and strike box to suit centre locks</p>	<p><b>03.224</b></p>
	<p><b>Scale 1 : 2</b></p>	

# Installation details

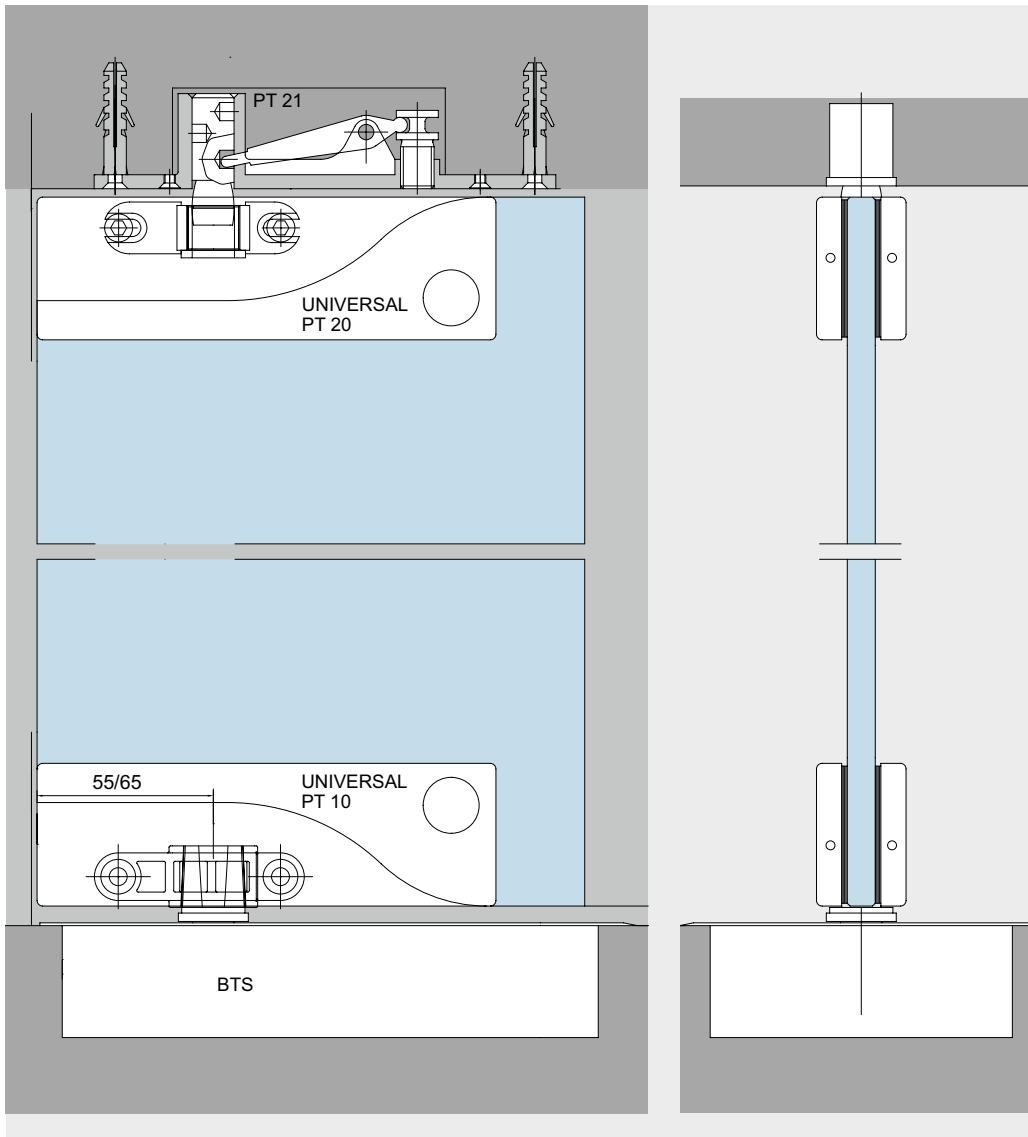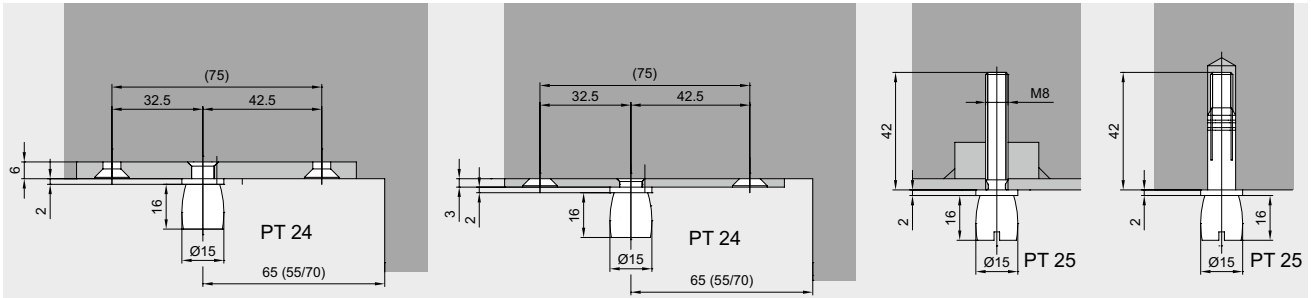**Advisory:** Please note that the upper pivots for UNIVERSAL and those for MUNDUS are not mutually compatible. The spigot diameters of the MUNDUS fittings vary..






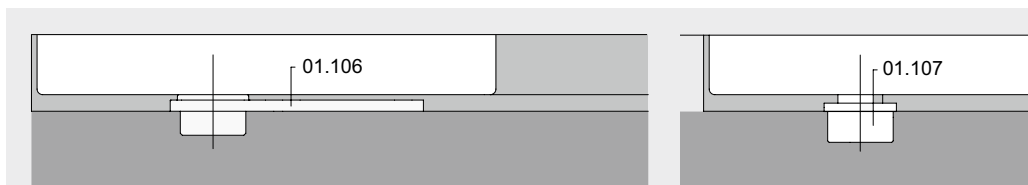Fixing of top pivots and top centres for PT 20.



Fixing of floor springs, pivot bearings for PT 10.

# Glass preparation

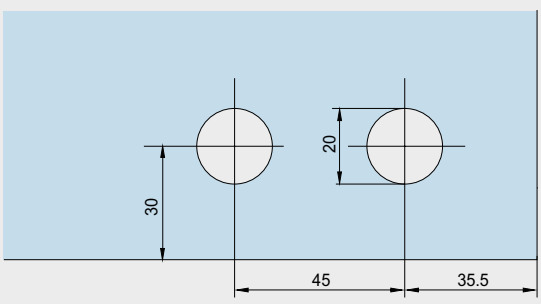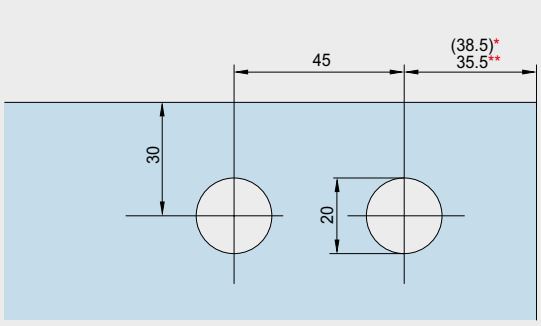
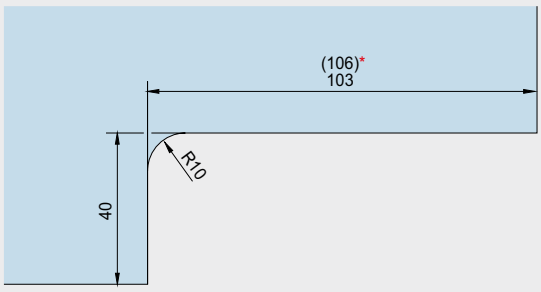
	Product description	Art. No.
	<b>Bottom patch fitting</b>  <b>Scale 1 : 2</b>	<b>01.200</b> <b>01.201</b>
	<b>Top patch fittings</b>  <b>Scale 1 : 2</b>	<b>*01.210</b>
	<b>Overpanel patch fittings</b>  <b>Scale 1 : 2</b>	<b>**01.220</b>

\* In conjunction with bottom door rail with 18 mm pivot point distance


**\*\* Important note:**  
 When using the acrylic-edge protection profile, please note the special glass preparation required (see page 77).

	Product description	Glass thickness	Art. No.
	<p><b>Top and bottom patch fittings</b></p> <p>in conjunction with radiused edge strip. TSG only!</p> <p><b>Scale 1 : 2</b></p>	<p>10 mm</p>	<p><b>01.200</b> <b>01.201</b> <b>01.210</b></p> <p><b>01.021.001.00</b></p>
	<p><b>Top patch fittings</b></p> <p>in conjunction with botom door rail and edge protection profile. TSG only!</p> <p><b>Scale 1 : 2</b></p>	<p>10 mm</p>	<p><b>01.210</b></p> <p><b>01.021.001.00</b></p>

# Overpanel and sidelight

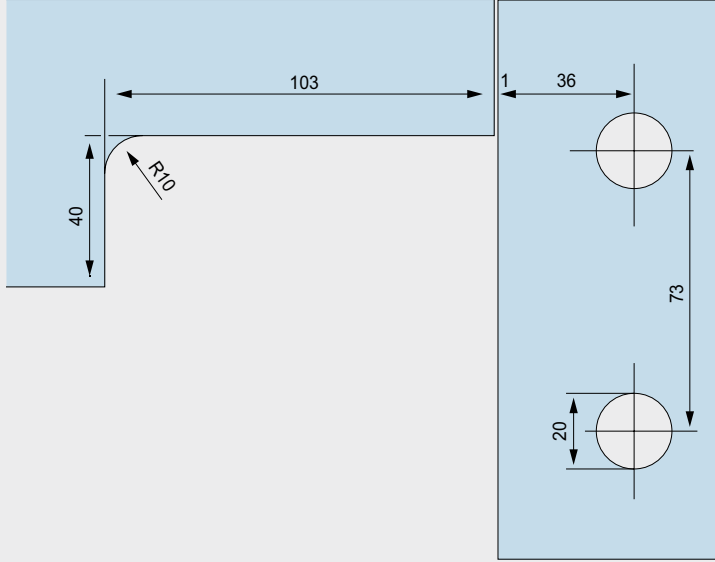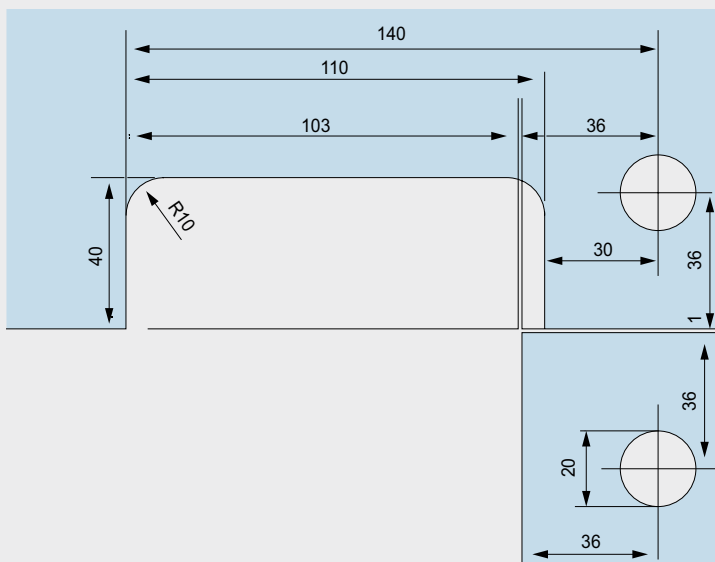	Product description	Art. No.
	<p><b>Divided overpanel</b></p> <p><b>Scale 1 : 2</b></p>	<p><b>01.240</b> <b>01.245</b></p>
	<p><b>Undivided overpanel</b></p> <p><b>Scale 1 : 2</b></p>	<p><b>01.240</b> <b>01.245</b></p>

## Construction details

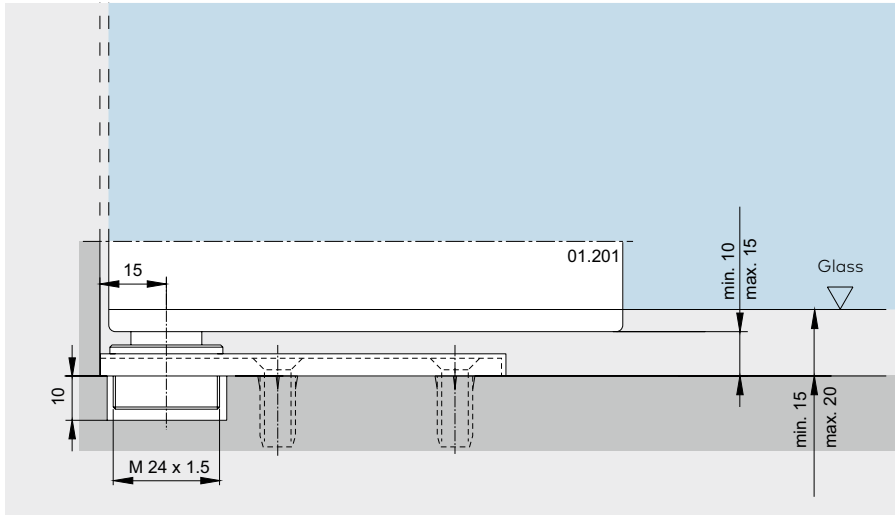

Using the bottom patch on pivot bearing with cover plate (Art. No. 01.201) the air gap between floor and glass is 15–20 mm (by height adjustability).

To reduce the air gap to 10 mm: Embed base plate into the floor.

## Versatility plus multiplicity with UNIVERSAL Arcos

Patch fittings and connector hardware for overpanels and side panels, fin fittings for particularly large systems – with the curved arc motif of the Arcos design always incorporated in each component. Gentle reflections that change with the planes give both the glass and its fittings the appearance of a harmonious whole.





**Easy glass preparation, secure fixing**

dormakaba-Glas has an intimate knowledge of the special properties of glass as a building material. This has led to the design of fittings requiring only minimal glass preparation – a quick and easy cut-out with additional holes. Carefully considered and positive measures have been taken to create the maximum clamping surface with optimum clamping efficiency.

**Suitable for common glass thicknesses**

UNIVERSAL Arcos fittings are supplied as standard with gasket to suit 10 mm glass. For 8 mm and 12 mm glass, correspondingly thicker and thinner gasket is available. Some patches are even designed to fit directly with different glass thicknesses.

**Variable pivot point**

All the inserts for corner and overpanel patches in the UNIVERSAL Arcos program have been designed and manufactured to give two options in the pivot point distance from the sidepanel or frame. It can be either 55 mm or 65 mm.

**Reliability built in**

Quality materials and thorough workmanship mean that UNIVERSAL Arcos fittings have the features necessary to meet the most demanding of specifications. The fittings are designed to cope with large and heavy doors up to a maximum weight of 130 kg: for instance, a door blade 3,000 mm high by 1,200 mm wide, using 10 mm glass is quite possible.

**Clip-on technique**

The innovative clip-on technique incorporated in the hardware ensures that the cover caps can be secured to the basic components so that the fixing is virtually invisible.

**Matching range of locks**

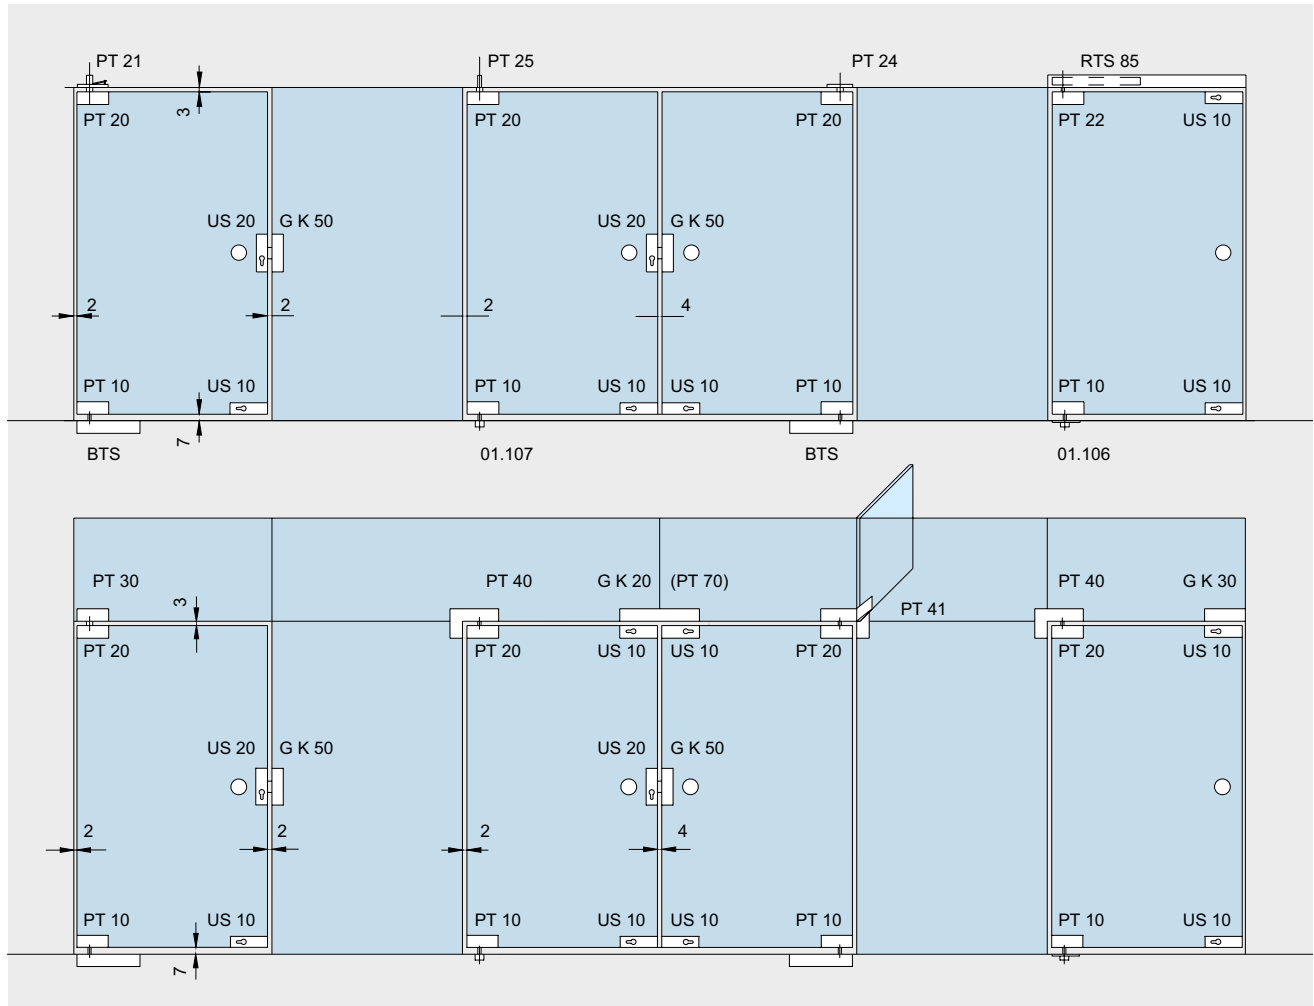
The UNIVERSAL Arcos range includes every type of accessory, and of course, a variety of locks and strike boxes in a matching design concept, giving the designer plenty of choice from the options available.

**Short delivery times**

All the common patterns and types are available ex-stock (factory). Specials will be prepared promptly.

# Type section

**Toughened glass assemblies with fittings and locks.**  
**All standard assembly types see page 42.**



BTS	= Floor spring	PT	= Centre hung door fittings	US	= Lock
GK	= Strike box	RTS	= Transom closer		

### Maximum door weight and width for UNIVERSAL fittings

max. door weight: 130 kg\*  
 max. door width: 1,200 mm\*\*

For doors with higher frequency and in public areas we would advice to use a door rail for doors above 110 kg and door width larger than 1,100 mm. For door weights up to 150 kg and widths up to 1,400 mm door rails should be used.

#### \* For door heights up to 2,500 mm

- For doors with a height of more than 2,500 mm we have to keep additional conditions/limits:
- Glass thickness  $\geq 10$  mm
  - + Usage of a handle bar with 3 connection points in minimum and a minimum height of 2/3 door height

#### \*\* Use of door closers

Doors  $\leq 1,100$  mm must be provided with door closers of type EN 3 (with or without backcheck), and doors  $\geq 1,100$  mm need to be fitted with larger door closers (e.g. EN 4, 5 or 6) without backcheck.

**Torque for fixing screws**

Screws M 6: 10 Nm (4 mm)\*

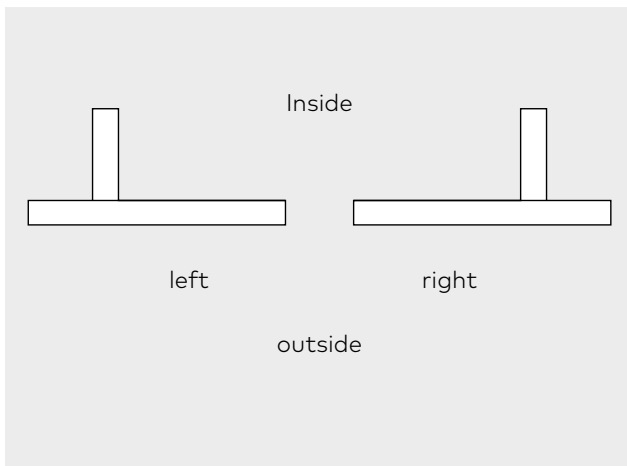
Screws M 6: 15 Nm (5 mm)\*

Screws M 8: 20 Nm (5 mm)\*

\*Allan key size






**Note for stiffening elements:**







"Left" or "Right" is always determined from the outside and as viewed from above.







# Patch fittings

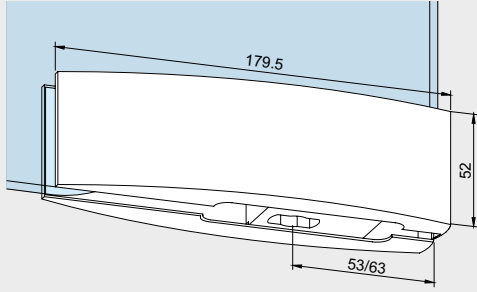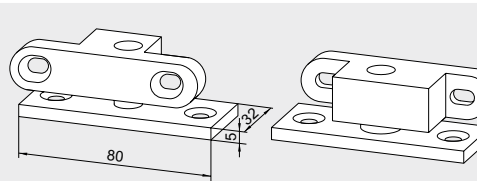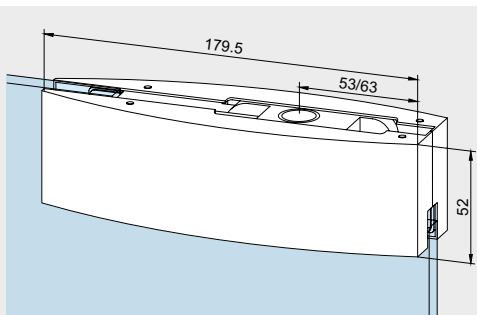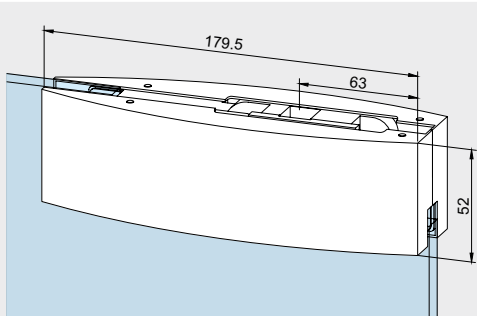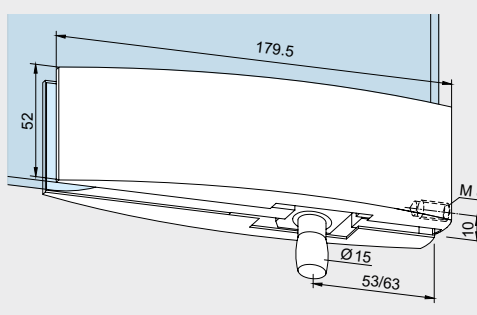Shown with 10 mm glass. From 12 mm glass measurements change accordingly. Accessories see page 224.

	Product description	Art. No.
	<p><b>Arcos PT 10</b>  <b>Bottom patch</b>                      with insert for DORMA floor spring spindle, or round pivot 14 mm Ø</p> <p>Weight in kg:                      Aluminum 0.564                      Stainless steel 0.662</p>	<p><b>26.100</b></p>
	<p><b>Floor pivot bearing</b>                      for damp environments, with insert for PT 10, <b>without floor recess</b>                      max. door weight 80 kg</p> <p>Weight in kg: 0.195</p>	<p><b>01.137</b></p>
	<p><b>Arcos PT 20</b>  <b>Top patch</b>                      with plastic socket for top pivot 15 mm Ø</p> <p>Weight in kg:                      Aluminum 0.477                      Stainless steel 0.575</p>	<p><b>26.100</b></p>
	<p><b>Arcos PT 22</b>  <b>Top patch</b>                      with insert for DORMA RTS transom closer</p> <p>Weight in kg:                      Aluminum 0.578                      Stainless steel 0.677</p>	<p><b>26.112</b></p>
	<p><b>Arcos PT 30</b>  <b>Overpanel patch</b>                      with pivot 15 mm Ø, with M 8 tapped hole at side</p> <p>Weight in kg:                      Aluminum 0.528                      Stainless steel 0.636</p>	<p><b>26.120</b></p>

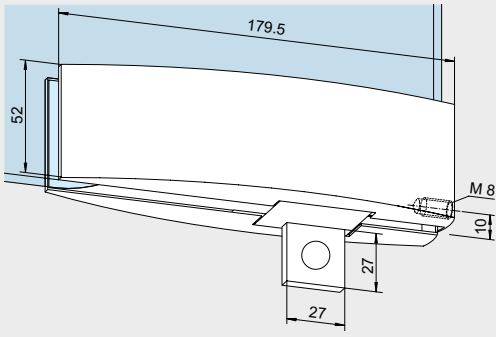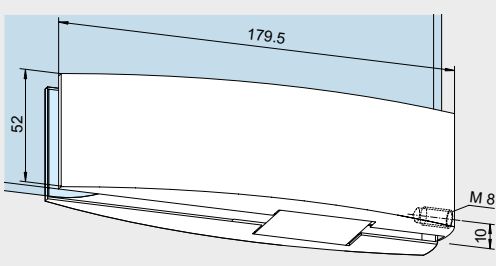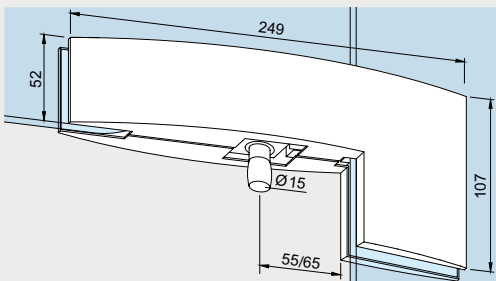	Product description	Art. No.
	<p><b>Arcos PT 30</b>  <b>Overpanel patch</b>                      with stop insert</p> <p>Weight in kg:                      Aluminum 0.528                      Stainless steel 0.580</p>	<p><b>26.420</b></p>
	<p><b>Arcos PT 30</b>  <b>Overpanel patch</b>                      with blanking insert</p> <p>Weight in kg:                      Aluminum 0.519                      Stainless steel 0.571</p>	<p><b>26.421</b></p>
	<p><b>Fixing plate</b>                      for overpanel patch PT 30</p> <p>Weight in kg:                      Aluminum 0.016                      Brass 0.038</p> <p>Stainless steel not available,                      satin chrome on brass supplied.</p>	<p><b>03.128</b></p>
	<p><b>Wall anchor</b>                      with thread M 8 for overpanel patch PT 30</p> <p>Weight in kg: 0.040</p>	<p><b>01.133</b></p>
	<p><b>Threaded rod</b>                      with thread M 8 for overpanel patch PT 30</p> <p>Weight in kg: 0.032</p>	<p><b>01.134</b></p>
	<p><b>Arcos PT 40</b>  <b>Patch for overpanel and side panel</b>                      with pin 15 mm Ø</p> <p>Weight in kg:                      Aluminum 0.755                      Stainless steel 0.937</p>	<p><b>26.140</b></p>



# Patch fittings

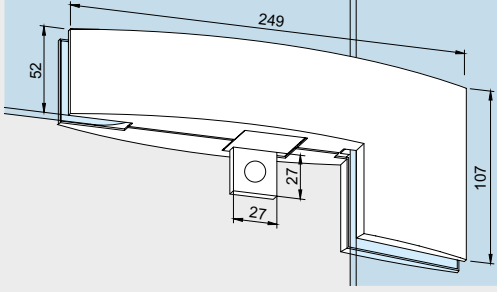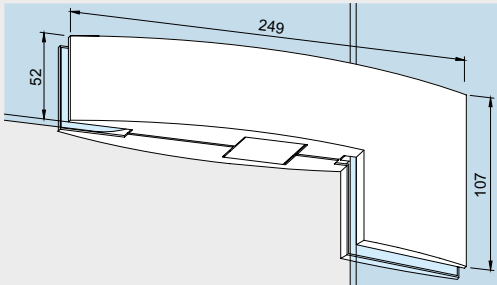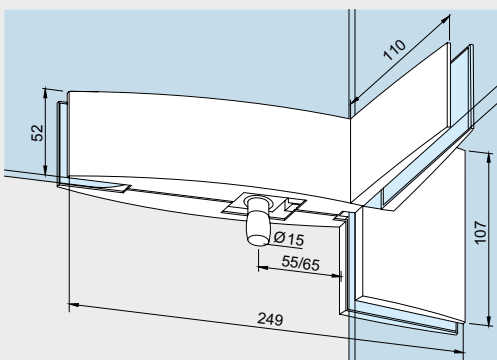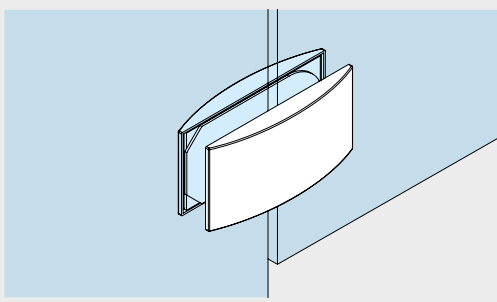	Product description	Art. No.
	<p><b>Arcos PT 40</b>  <b>patch for overpanel and side panel</b>                      with stop insert</p> <p>Weight in kg:                      Aluminum 0.755                      Stainless steel 0.937</p>	<p><b>26.440</b></p>
	<p><b>Arcos PT 40</b>  <b>patch for overpanel and side panel</b>                      with blank insert</p> <p>Weight in kg:                      Aluminum 0.746                      Stainless steel 0.928</p>	<p><b>26.441</b></p>
	<p><b>Arcos PT 41</b>  <b>patch for overpanel and side panel</b>                      with fin fitting inside with pivot 15 mm Ø</p> <p>do. with stop insert</p> <p>do. with blanking insert</p> <p>Weight in kg:                      Aluminum 0.952                      Stainless steel 1.197</p>	<p><b>*26.162/26.163</b></p> <p><b>*26.262/26.263</b>                      not illustrated</p> <p><b>*26.264/26.265</b>                      not illustrated</p>
	<p><b>Overpanel-sidelight connector</b></p> <p>Weight in kg:                      Aluminum 0.146</p>	<p><b>12.536</b></p>





\* Left hand fin (illustration shows left hand) / Right hand fin  
 Left or right hand are determined by view from outside.

# Locks, complete

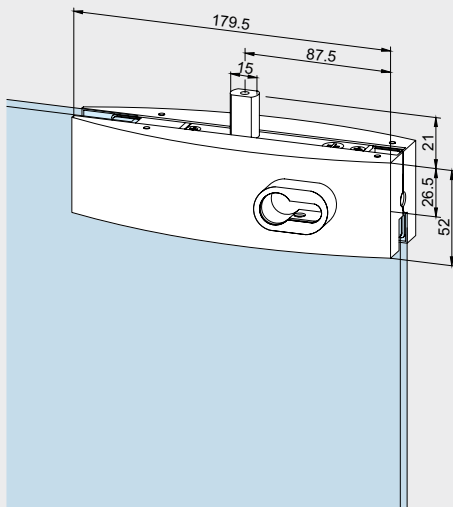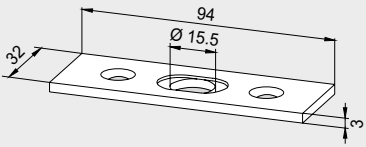For 10 mm glass thickness.  
Accessories are shown from page 224 on.



	Product description	Glass thickness	Art. No.
	<p><b>Arcos US 10 corner lock,</b> prepared for Europrofile cylinder, single throw, bolt projection 20 mm, with security rosettes on both sides, 14 mm high.</p> <p>Lock insert:</p> <ul style="list-style-type: none"> <li>• high corrosion resistance according to EN 1670, class 4</li> <li>• with regard to type-test according to DIN 18251, class 3*</li> </ul> <p><b>Attention:</b> <b>Modified position of locking bolt in comparison to UNIVERSAL US 10</b></p> <p>Weight in kg: Aluminum 0.942 Stainless steel 1.053</p>	<p>10 mm</p>	<p><b>26.206</b></p>
	<p><b>Lock keeper plate,</b> stainless steel, two parts, adjustable ± 5 mm</p> <p>Weight in kg: 0.048</p> <p>alternative: Floor sockets</p>		<p><b>05.190</b></p> <p><b>05.192</b> not illustrated <b>05.193</b> not illustrated <b>05.194</b> not illustrated</p>

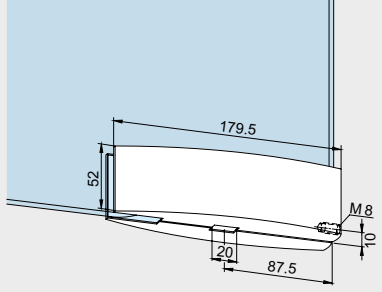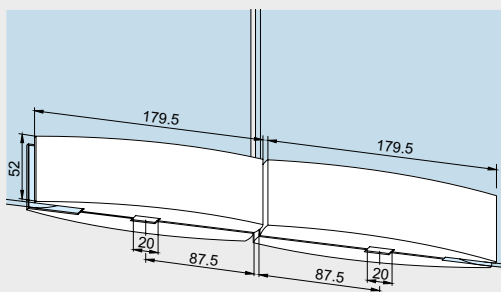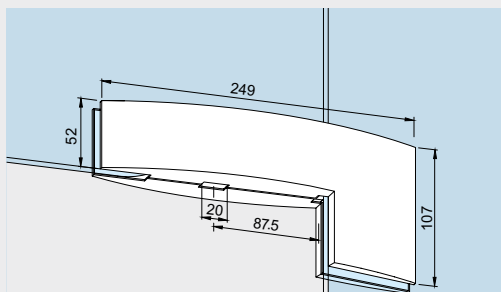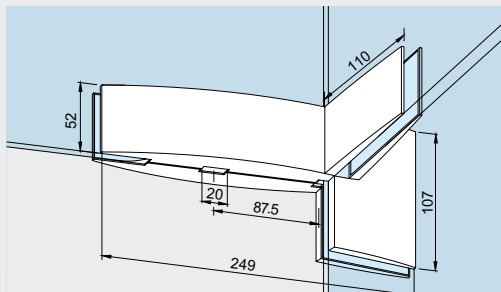\* Extract from DIN 18251, class 3: Type-test with 50,000 locking bolt operating cycles. Furthermore the lock was tested successfully by a neutral testing institute with 100,000 locking bolt operating cycles.

	Product description	Art. No.
	<p><b>Arcos GK 30</b>  <b>Single overpanel strike box</b>                      with threaded hole at side,                      to suit Arcos US 10 corner lock</p> <p>Weight in kg:                      Aluminum 0.418                      Stainless steel 0.536</p>	<p><b>26.230</b></p>
	<p><b>Arcos GK 20</b>  <b>Double overpanel strike box</b>                      to suit Arcos US 10 corner lock,                      consisting of two Arcos GK 30                      with threaded connecting bolt</p> <p>Weight in kg:                      Aluminum 0.844                      Stainless steel 0.948</p>	<p><b>26.245</b></p>
	<p><b>Arcos GK 40</b>  <b>Overpanel strike box</b>                      to suit Arcos US 10 corner lock</p> <p>Weight in kg:                      Aluminum 0.709                      Stainless steel 1.010</p>	<p><b>26.250</b></p>
	<p><b>Arcos GK 41</b>  <b>Strike box</b>                      to suit Arcos US 10 corner lock,                      with fin fitting</p> <p>Weight in kg:                      Aluminum 0.906                      Stainless steel 1.270</p>	<p><b>*26.194/26.193</b></p>

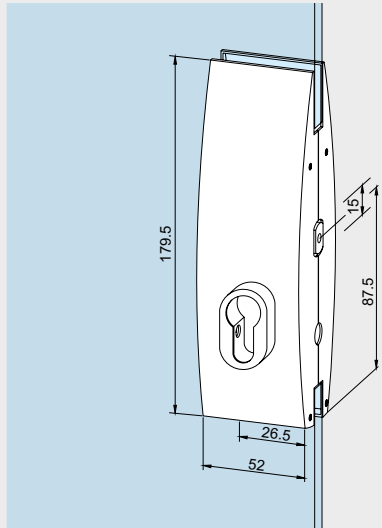
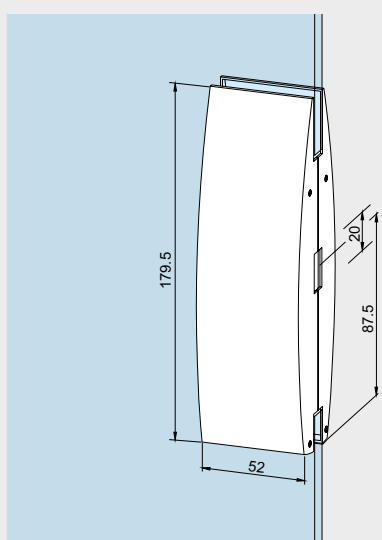
\* Left hand fin (illustration shows left hand) / Right hand fin  
 Left or right hand are determined by view from outside.



	Product description	Glass thickness	Art. No.
	<p><b>US 20 centre lock,</b> prepared for Europrofile cylinder, single throw, bolt projection 20 mm, with security rosettes 14 mm thick.</p> <p>Lock insert:</p> <ul style="list-style-type: none"> <li>• high corrosion resistance according to EN 1670, class 4</li> <li>• with regard to type-test according to DIN 18251, class 3*</li> </ul> <p><b>Attention:</b> <b>Modified position of locking bolt in comparison to UNIVERSAL US 20</b></p> <p>Weight in kg: Aluminum 0.942 Stainless steel 1.053</p>	<p>10 mm</p>	<p><b>26.215</b></p>
	<p><b>Arcos GK 50 Strike box</b> to suit Arcos US 20 centre lock</p> <p>Weight in kg: Aluminum 0.602 Stainless steel 0.727</p>		<p><b>26.224</b></p>



\* Extract from DIN 18251, class 3: Type-test with 50,000 locking bolt operating cycles. Furthermore the lock was tested successfully by a neutral testing institute with 100,000 locking bolt operating cycles.

# Glass preparation

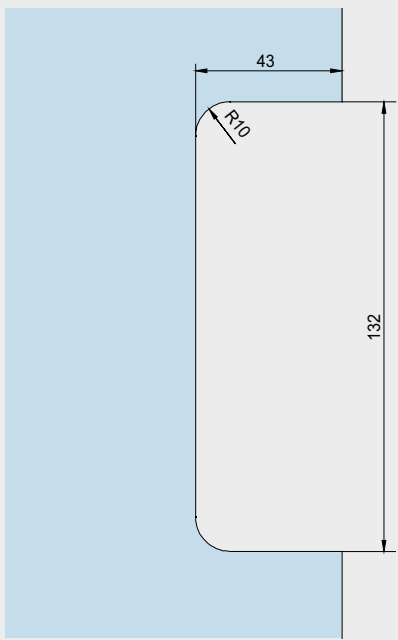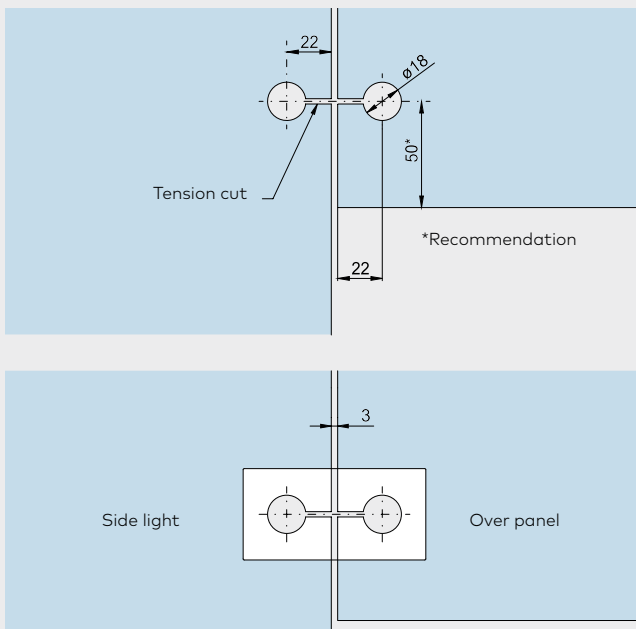	Product description	Art. No.
	<p><b>Arcos US 20, GK 50</b> Centre lock</p> <p>and strike box to suit centre lock</p> <p><b>Scale 1 : 2</b></p>	<p><b>26.215</b></p> <p><b>26.224</b></p>
	<p><b>Overpanel-sidelight connector</b></p> <p>Weight in kg: Aluminum 0.146</p>	<p><b>12.136</b></p>


# Construction details

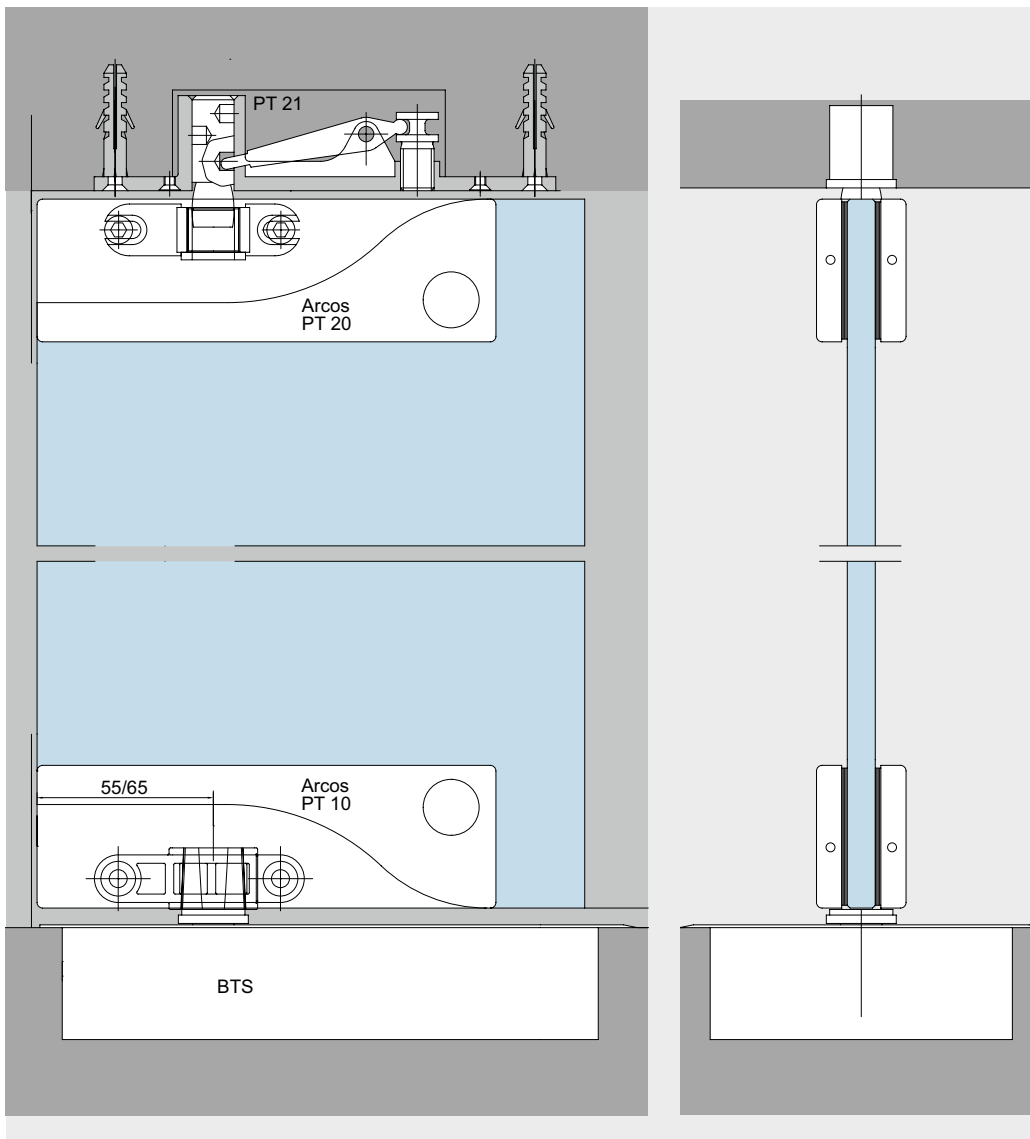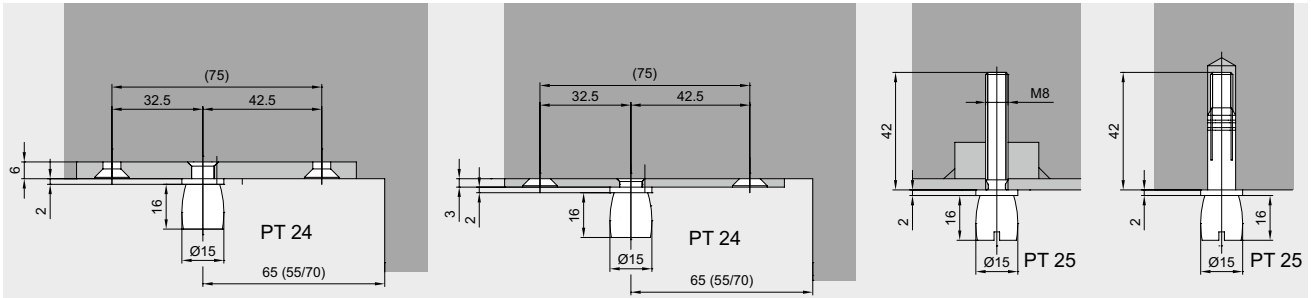**Advisory:** Please note that the upper pivots for UNIVERSAL and those for MUNDUS are not mutually compatible. The spigot diameters of the MUNDUS fittings vary..







### Fixing of pivots and top centres

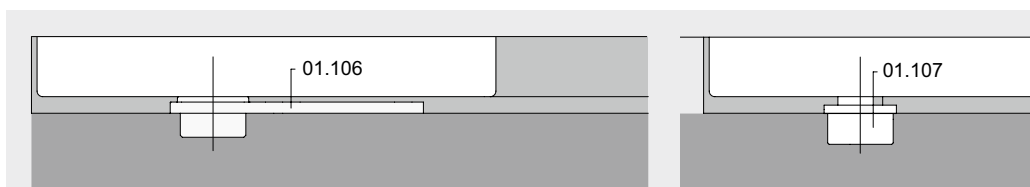Fixing of top pivots and top centres for Arcos PT 20 and Arcos PT 22.



Fixing of floor springs, pivot bearings for Arcos PT 10

	Product description	Art. No.
	<p><b>Arcos PT 10, PT 20, PT 22, PT 30</b>                      Top and bottom patches,                      overpanel patch</p> <p><b>Scale 1 : 2</b></p>	<p><b>26.100</b>  <b>26.110</b>  <b>26.112</b>  <b>26.120</b>  <b>26.420</b>  <b>26.421</b></p>
	<p><b>Arcos PT 40</b>                      Patch for overpanel and side panel</p> <p><b>Scale 1 : 2</b></p>	<p><b>26.140</b>  <b>26.440</b>  <b>26.441</b></p>
	<p><b>Arcos PT 41, GK 41</b>                      Patch for overpanel and                      side panel with fin fitting inside</p> <p><b>Scale 1 : 2</b></p>	<p><b>26.162</b>  <b>26.163</b>  <b>26.193</b>  <b>26.194</b></p>

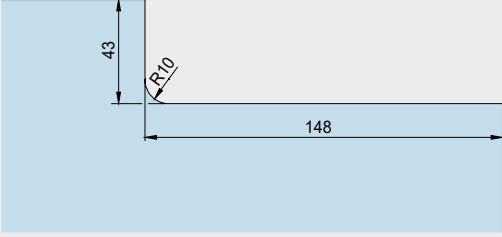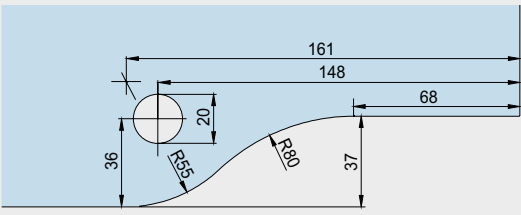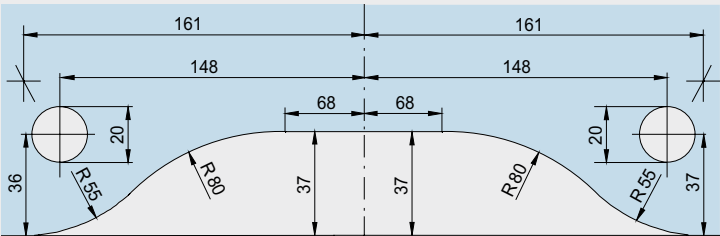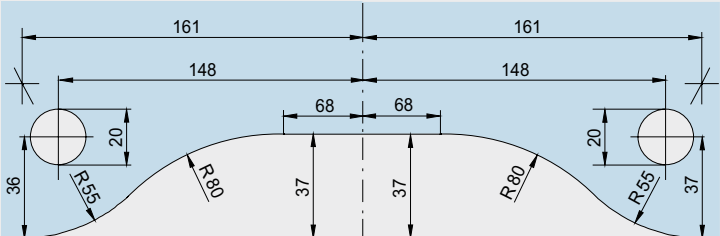	Product description	Art. No.
	<p><b>Arcos US 10</b> Corner locks</p> <p><b>Scale 1 : 2</b></p>	<p><b>26.206</b></p>
	<p><b>Arcos GK 30 (PT 30)</b> Single overpanel strike box</p> <p><b>Scale 1 : 2</b></p>	<p><b>26.230</b></p>
	<p><b>Arcos GK 20</b> Double overpanel strike box</p> <p><b>Scale 1 : 2.5</b></p>	<p><b>26.245</b></p>
	<p><b>Arcos GK 40 (PT 40)</b> Corner overpanel strike box</p> <p><b>Scale 1 : 2</b></p>	<p><b>26.250</b></p>

# Content

## RP

96	<b>General information</b>
97	<b>Type illustrations</b>
98	<b>Components</b>
224	<b>Accessories</b>
248	<b>Safety-related information</b>



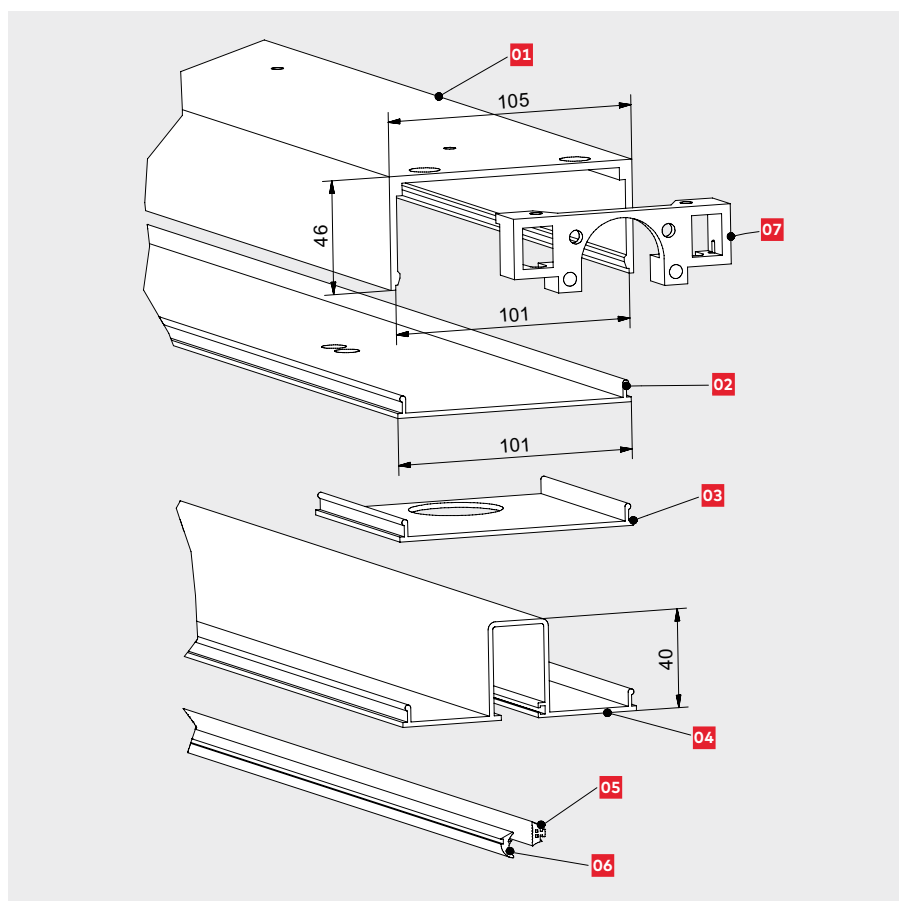
**RP**

## Marvellously concealed transom door closer

The RP pivot door system works with a tubular transom profile in which the RTS transom closer is integrated and concealed. The system is fixed on the ceiling using brackets which are concealed after system installation. A top patch fitting (UNIVERSAL PT 22) attaches the all-glass door to the closer. A bottom patch fitting (UNIVERSAL PT 10) connects the door to the floor pivot, which measures only a few centimetres. So glass thicknesses of 8 – 12 mm are feasible.

The UNIVERSAL patch fittings can be replaced by door rails top and bottom or MUNDUS patch fittings as a special option. When using MUNDUS Premium patch fittings, you also have the option of installing laminated safety glass (LSG).

The RTS transom closer not only returns the door to the zero position each time it is opened, it also has a special dampening system to protect the door against unwanted impact caused by over-aggressive opening. In addition, the integral hold-open, which also comes as standard, enables the door to be held open at an angle of 90°.





### Transom tube configuration:

- 01**  
Transom tube for fixing on ceiling, as lintel or similar, max. length 6,000 mm
- 02**  
Cover profile for door, clip-on, max. length 6,000 mm
- 03**  
Cover profile for fixed sidelights, clip-on type with glass groove
- 04**  
Cover profile for fixed sidelights, clip-on, with glazing groove
- 05 / 06**  
Contact profile / glass wedge profile, depending on combination for 8, 10 or 12 mm glass thicknesses of the sidelight
- 07**  
Fixing bracket for securing transom tube and closer


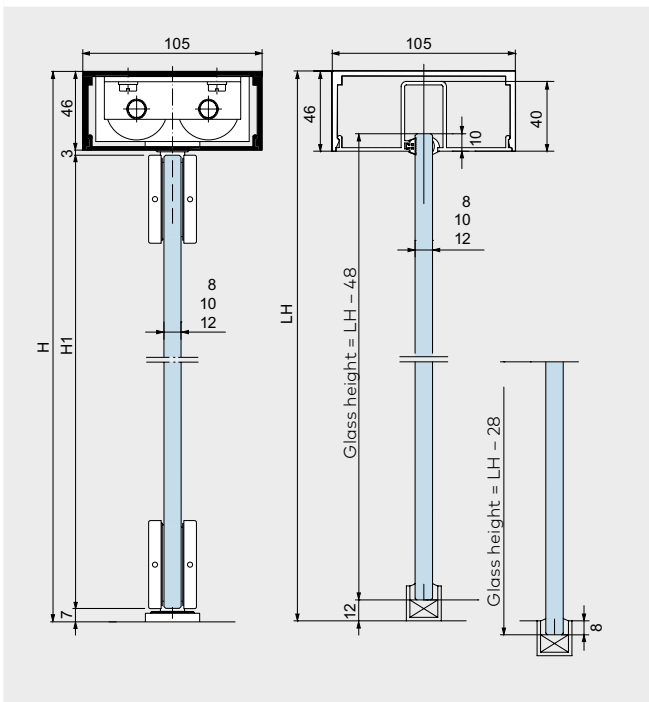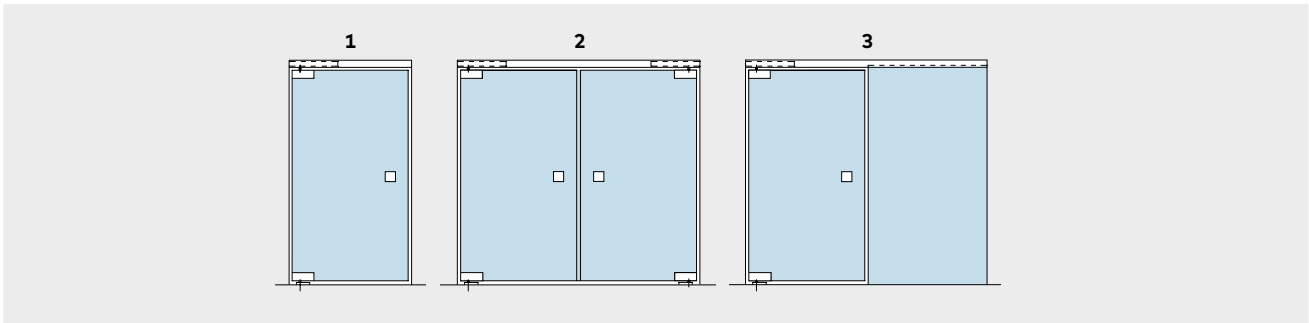
# Type selection



### Options

- 1 Single leaf double-action door with transom tube
- 2 Pair of double-action doors with transom tube
- 3 Double-action door with through-running transom tube and fixed sidelight

Further versions up to 6000 mm are possible.

### Materials and finishes

- Aluminum, silver EV1 anodized (similar Eloxal I EV1 / Eloxal II C 0) (101)
- Aluminum, similar satin stainless steel anodized (for profile material) (similar Eloxal II C 31) (113)
- Aluminum, traffic white powder coated (300)
- Aluminum special color anodized (199)
- Aluminum, special color powder coated (399)



### Door panel dimensions

- Glass thicknesses: 8 / 10 / 12 mm
- Door height H1: H - 56 mm
- For max. door panel weights and widths please see the table below.

### Sidelight dimensions

- Glass thickness: 8 / 10 / 12 mm with two-part sealing profile
- Sidelight height: H - 28 mm + floor pocket, where required


### Also with door rails available

max. height	max. width	max. door weight (incl. fittings)	RTS version	
2,500	800-1,100	80 kg	RTS EN 3	
3,500	max. 1,250	110 kg	RTS EN 4	

with door rails top and bottom see detail sheets 04-030 and 04-060

If you have any questions regarding special designs with door rails or MUNDUS patch fittings, our Application Engineering department will be glad to advise you.

# Double-action system for glass doors

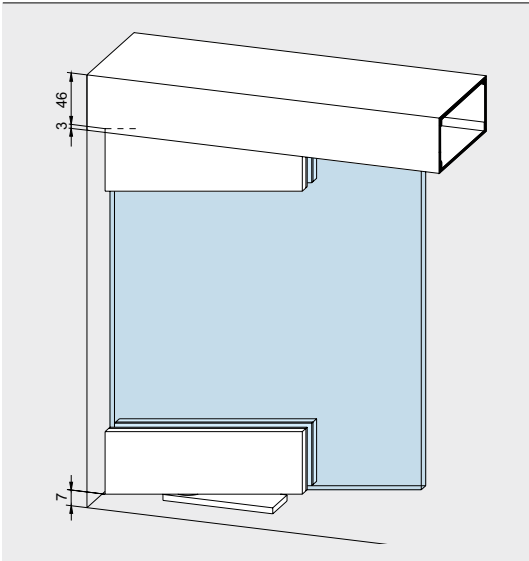	Product description	Art. No.
	<p><b>Double-action system for glass doors</b>            complete, consisting of            1 transom tube length 1,000 mm;            1 cover profile length 1,000 mm;            1 RTS 85 transom closer; EN3, hold open 90°            (For door widths less than 800 mm, door            closers of spring strength EN 2 may also be            used. Please indicate requirement when            ordering.)            1 fixing bracket;            1 bottom patch fitting PT 10;            1 top patch fitting PT 22;            1 floor pivot bearing</p> <p>Weight in kg:        8.083</p> <p>When ordering, please indicate the precise            system dimensions or attach a corresponding            drawing.</p>	<p><b>01.300</b></p>

	Product description	Art. No.
	<p><b>01</b>  <b>Transom tube</b>                      for fixing at ceiling,                      as lintel, or similar,</p>	
	<p>stock length 6,000 mm                      in fixed lengths</p>	<p><b>01.301</b>  <b>01.311</b></p>
	<p>Weight in kg/m:                      Aluminum 1.620</p>	
	<p><b>02</b>  <b>Cover profile</b>                      for door area, clip-on</p>	
	<p>stock length 6,000 mm                      in fixed lengths</p>	<p><b>01.302</b>  <b>01.305</b></p>
	<p>Weight in kg/m:                      Aluminum 0.610</p>	
	<p><b>03</b>  <b>Cover plate</b>                      with cut-out for door closer spindle</p>	
<p>length 90 mm</p>	<p><b>01.303</b></p>	
<p>Weight in kg:                      Aluminum 0.056</p>		
<p><b>04</b>  <b>Cover profile with glass groove</b>                      to clip on                      Art.No. 01.301 / 311,                      to hold fixed sidelights inclusive</p>		
<p><b>05 / 06</b>  <b>Contact profile or                      glass wedge profile</b>                      in 2 resp. 4 mm thicknesses, depending on                      combination for 8, 10 or 12 mm glass                      thickness of the sidelight</p>		
<p>stock length 6,000 mm                      in fixed lengths</p>	<p><b>01.304</b>  <b>01.314</b></p>	
<p>Weight in kg:                      Aluminum 0.810</p>		
<p><b>07</b>  <b>Fixing bracket</b>                      for securing transom                      tube and closer</p>	<p><b>01.306</b></p>	
<p>Weight in kg:                      Aluminum 0.080</p>		

# Content

## BEYOND

102	<b>General information</b>
104	<b>Type illustrations / sets</b>
108	<b>Components</b>
108	<b>Glass preparation</b>
224	<b>Accessories</b>
248	<b>Safety-related information</b>



**BEYOND**

## Systematic design

Safe, functional and extremely attractive, BEYOND, the unique system for glass doors without risk of pinched fingers with swing doors.

The development of BEYOND has been shaped by the search for a solution that combines a modern, attractive design with maximum safety and stability. In the swing-door system the pivot point is located directly at the glass edge, thus preventing the risk of trapped fingers often found at the secondary closing edges of glass swing.

BEYOND opens up a huge range of opportunities for incorporating frameless glass doors into toughened glass assemblies and wall openings. The BEYOND system offers an elegant, sophisticated solution for swing doors in all situations, whether private or public, modern or traditional.

Developed with the practical requirements of the market in mind, this product offers a sensible alternative wherever security, safety and functionality need to be complemented with an attractive design.



## Safe and secure

The patented BEYOND swing door system with its pivot point located centrally in the glass axis and close to the glass edge ensures safety and security. The alternative options of elegant, continuous pivot rod or smart short rod make the system suitable for any room situation. And with a choice of pull handles or lock/lever handle combinations, BEYOND enables the realisation of your design ideas.



The over panel pivot fitting  
– a slim connector.



An option for the bottom pivot point – short rod on a floor pivot.

If floor pivot bearings are being used, a separate lock or a tumbler is required.

# Short pivot rod

The BEYOND swing door system with short pivot rod offers maximum flexibility. No matter what the door dimensions, BEYOND short fittings provide a versatile solution.

DORMA floor pivots, or – particularly for double-action doors – DORMA BTS floor springs, form the ideal base for ensuring that the door always returns safely and securely to its home position. Since with the BTS floor spring the position of the pivot point requires it to be buried under the adjacent wall, the use of a glass side panel is recommended in this case. The top connection depends on the type of unit. When incorporating the glass door into a toughened glass assembly, the top connection is formed by an over panel pivot fitting; in the case of doors in wall openings, a top pivot bearing is fitted to the ceiling or in the lintel. Load transfer from

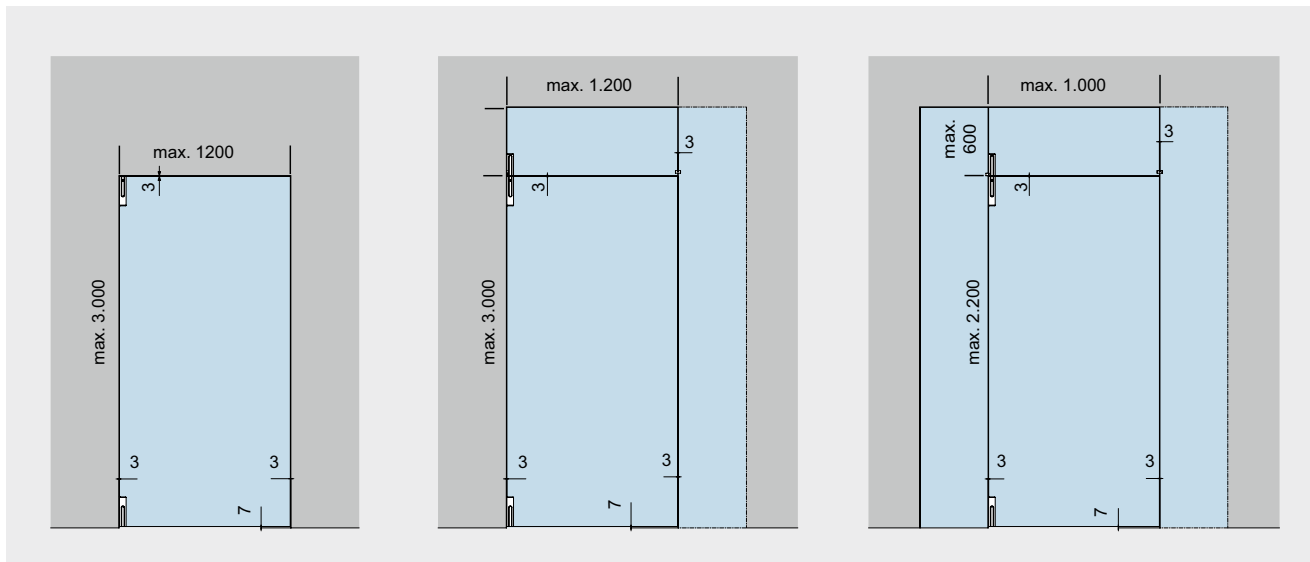
the overpanel and side panel can be effected by means of wall adapter profiles.

Depending on customer requirements, BEYOND offers suitable fittings for 10 mm and 12 mm glass. Finishes for fittings and accessories: aluminum EV1-Deco anodized (114) or similar satin stainless steel anodized (107).

For maximum values please see the typical assemblies.

**Note:**

Overpanel fitting wall connector  
max. 1,200 mm door width;  
overpanel fitting glass connector  
max. 1,000 mm door width.



**Basic set for individual door.**  
For installation in masonry.

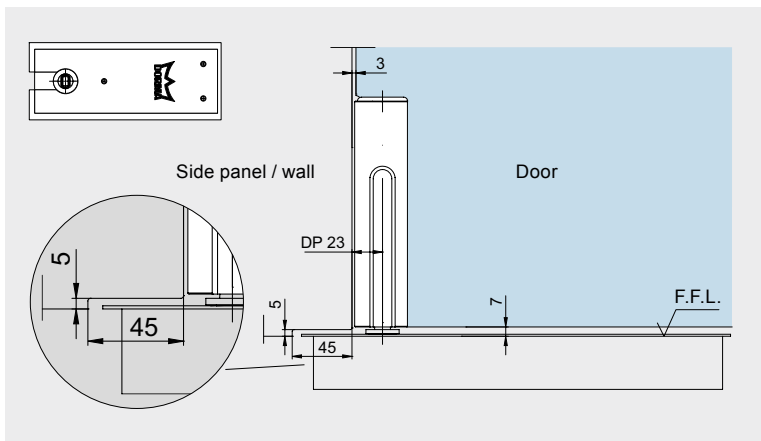
Max door height 3,000 mm  
Max door weight 80 kg

**Basic set and over panel fitting wall connector for door with over panel.**  
Optionally with side panel on closing side.

Max door height 3,000 mm  
Max door weight 80 kg

**Basic set and over panel fitting wall connector for door with over panel and side panel on pivot point side.**  
Optionally with side panel on closing side.

Max door height 2,200 mm  
Max door weight 80 kg







**Combination BEYOND and BTS**

(door closer available from Door Control Division)  
With the BTS floor spring, the position of the pivot point means that the unit has to be buried under the adjacent wall, or that the glass side screen has to be appropriately machined (see adjacent detail). The height of the recess cut into the glass will need to be adapted to the installation situation and the means by which the side screen is fixed.


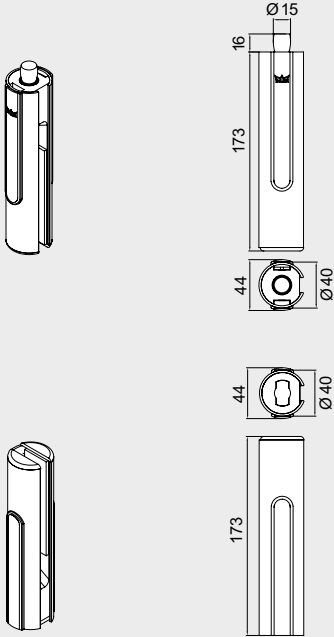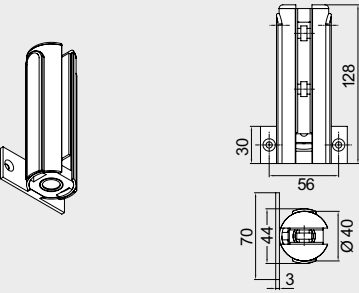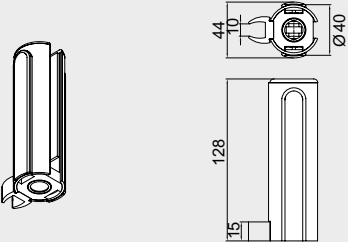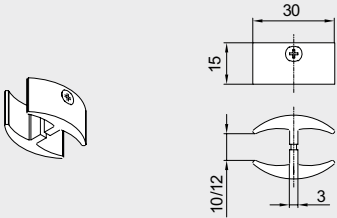
# Fittings and glass connector

	Product description	Glass thickness	Art. No.
	<p><b>BEYOND basic set:</b>  <b>Pivoting fitting set, short type,</b>                      comprising</p> <ul style="list-style-type: none"> <li>• 1 top pivot fitting with pivot Ø 15 mm,</li> <li>• 1 bottom pivot fitting with insert for DORMA floor spring spindle (90° turnable, e. g. DORMA BTS 80) or round pivot</li> </ul>	<p>10 mm 12 mm</p>	<p><b>30.100</b> <b>30.101</b></p>
	<p><b>BEYOND overpanel fitting, wall connector,</b>                      with plastic socket for top pivot</p>	<p>10 mm 12 mm</p>	<p><b>30.120</b> <b>30.121</b></p>
	<p><b>BEYOND overpanel fitting, glass connector,</b>                      with plastic socket for top pivot</p>	<p>10 mm 12 mm</p>	<p><b>30.130</b> <b>30.131</b></p>
	<p><b>BEYOND glass connector,</b>                      plastic, black,                      for connection of side panel at closing side</p>	<p>10 mm and 12 mm</p>	<p><b>30.320</b></p>

# Continuous pivot rod

The BEYOND swing door system with continuous rod offers complete freedom from the risk of trapped fingers. By locating the pivot point of the swing door right at the glass edge and providing a round profile, the nip hazard is reduced to zero.

For the floor mounting of single-action, and particularly double-action doors, the DORMA BTS floor spring offers a convenient alternative to the DORMA floor pivot. Since with the BTS floor spring the position of the pivot point requires it to be buried under the adjacent wall, the use of a glass side panel is recommended in this case. As with the short-rod model, the top connection depends on the type of unit. Toughened glass assemblies are fitted with an over panel pivot fitting, whereas with doors in wall openings a top pivot bearing with ceiling fixing is used. Load transfer from the over panel and side panel can be effected by means of wall adapter profiles.

In the case of heights over 2,200 mm, an anti-vibration device located midway along the pivot rod ensures quiet door operation.

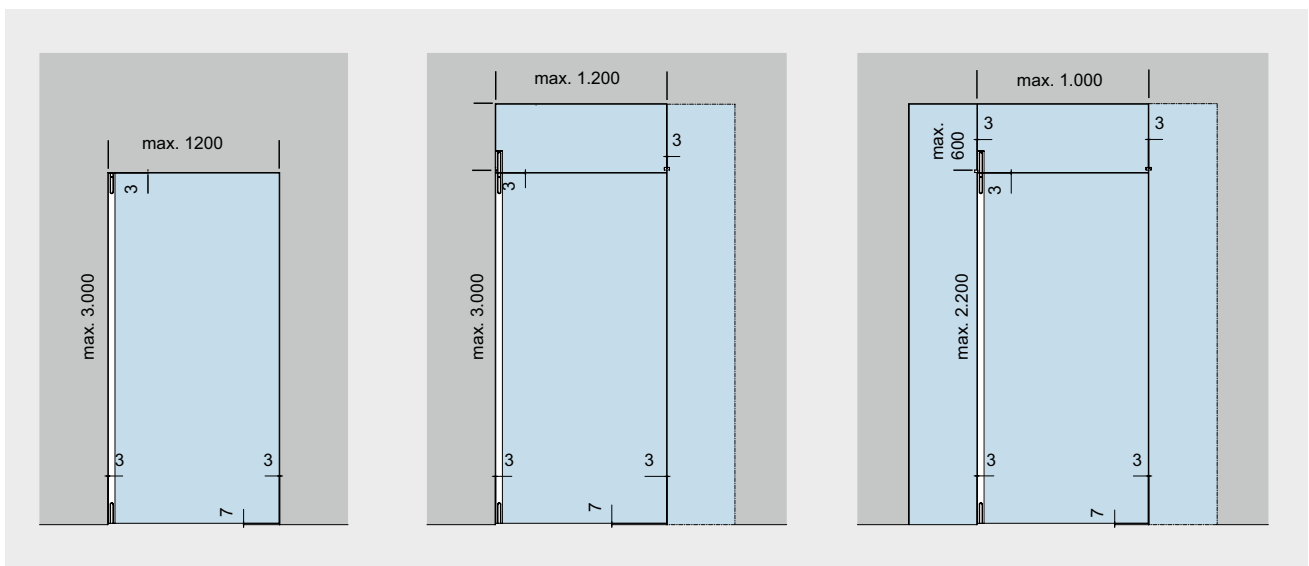
Depending on customer requirements, BEYOND offers suitable fittings for 10 mm and 12 mm glass.

Finishes for fittings and accessories: aluminum EV1-Deco anodized (compatible with finish 150) (114) or similar satin stainless steel anodized (107).

For maximum values please see the typical assemblies.

**Note:**

Overpanel fitting wall connector  
max. 1,200 mm door width;  
overpanel fitting glass connector  
max. 1,000 mm door width.



**Basic fitting for individual door.**  
For installation in masonry.

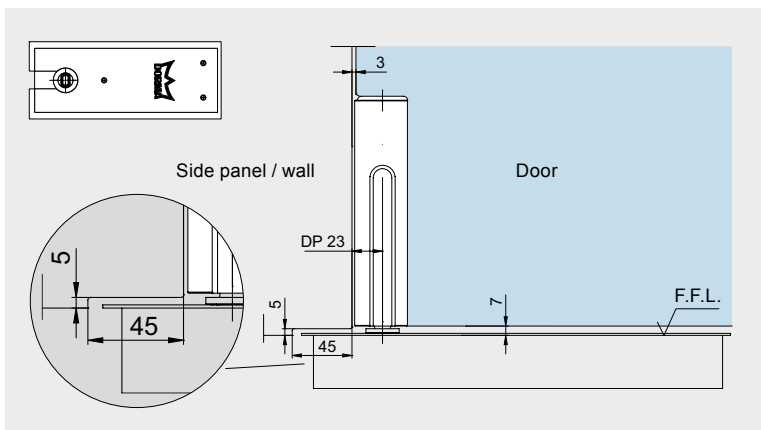
Max door height 3,000 mm  
Max. door weight 80 kg

**Basic fitting and over panel fitting wall connector for door with over panel.**  
Optionally with side panel on closing side.

Max door height 3,000 mm  
Max. door weight 80 kg

**Basic fitting and over panel fitting wall connector for door with over panel and side panel on pivot point side.**  
Optionally with side panel on closing side.






Max door height 2,200 mm  
Max. door weight 80 kg





**Combination BEYOND and BTS**

(door closer available from Door Control Division)  
With the BTS floor spring, the position of the pivot point means that the unit has to be buried under the adjacent wall, or that the glass side screen has to be appropriately machined (see adjacent detail). The height of the recess cut into the glass will need to be adapted to the installation situation and the means by which the side screen is fixed.
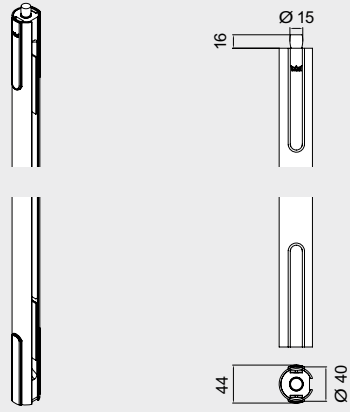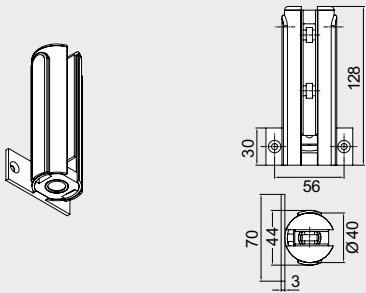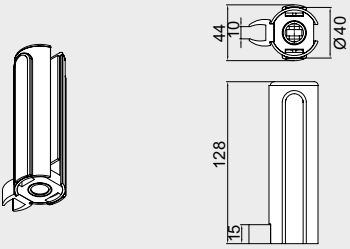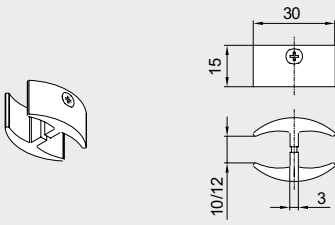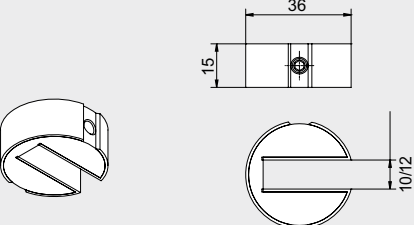
# Fittings and glass connector


	Product description	Glass thickness	Art. No.
	<p><b>BEYOND basic fitting:</b>  <b>Pivoting fitting, long type,</b>  with pivot <math>\varnothing</math> 15 mm at top  and insert for DORMA floor spring spindle  (90° turnable,  e. g. DORMA BTS 80) or round pivot at bottom</p> <p>Please indicate exact door height = glass measurement with order.</p>	10 mm 12 mm	<b>30.110</b> <b>30.111</b>
	<p><b>BEYOND overpanel fitting,</b>  <b>wall connector,</b>  with plastic socket for top pivot</p>	10 mm 12 mm	<b>30.120</b> <b>30.121</b>
	<p><b>BEYOND overpanel fitting,</b>  <b>glass connector,</b>  with plastic socket for top pivot</p>	10 mm 12 mm	<b>30.130</b> <b>30.131</b>
	<p><b>BEYOND glass connector,</b>  plastic, black,  for connection of side  panel at closing side</p>	10 mm and 12 mm	<b>30.320</b>
	<p><b>BEYOND</b>  <b>anti-vibration device</b>  for pivot fitting, long</p>	10 mm 12 mm	<b>30.034</b> <b>30.035</b>

# Glass preparation

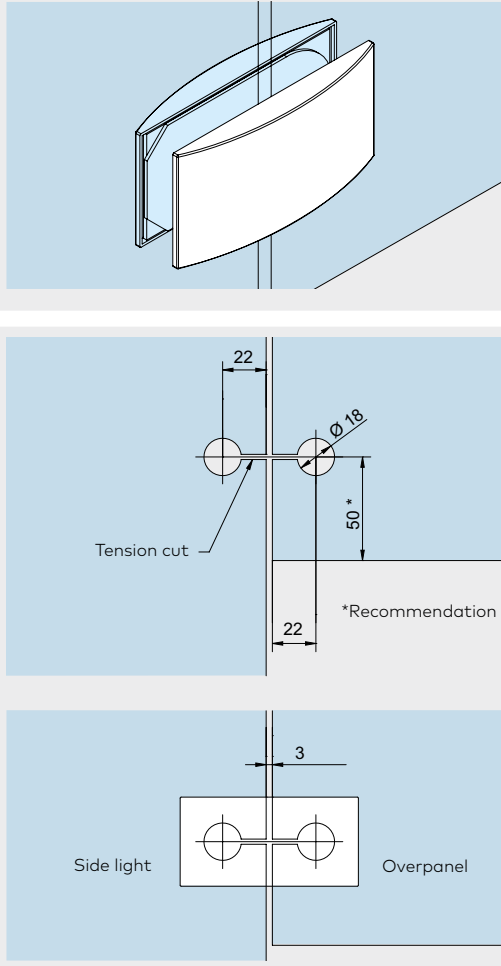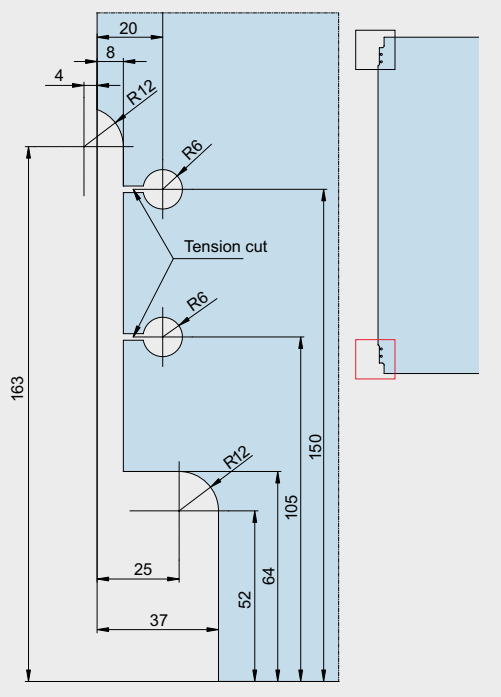	Product description	Art. No.
	<p><b>Overpanel-sidelight connector</b></p> <p>Weight in kg: Aluminum 0.146</p>	<p><b>12.536</b></p>
	<p><b>Pivoting fitting set, short type</b></p> <p>Drawing shows the bottom glass penetration. Top edge of glass is prepared accordingly.</p>	<p><b>30.100</b> <b>30.101</b></p>

**Product description**

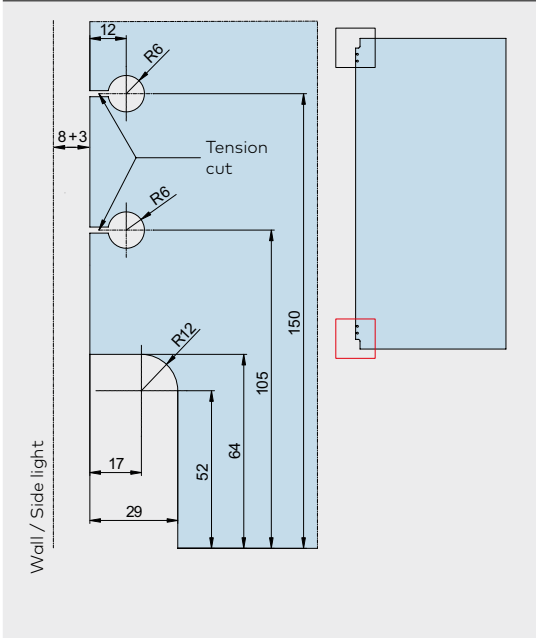**Art. No.**




**Pivoting fitting, long type**

Drawing shows the bottom glass penetration.  
Top edge of glass is prepared accordingly.

**30.110**

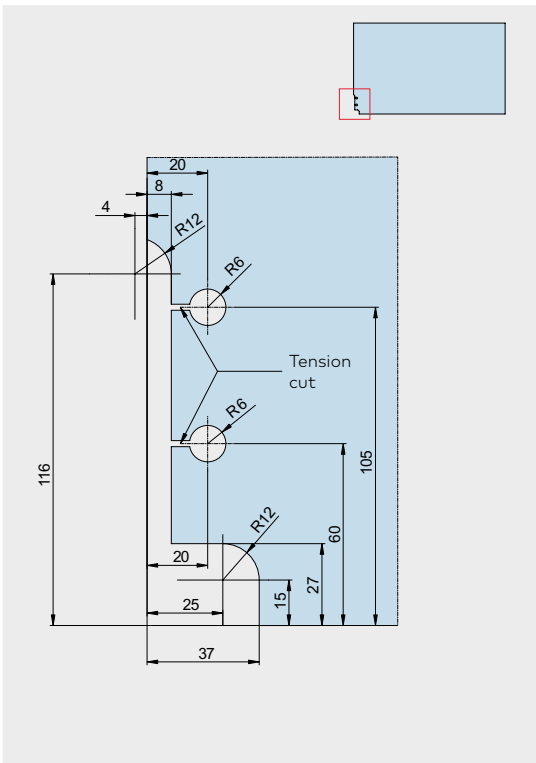**30.111**



**Overpanel fitting**

Wall connector and  
glass connector

**30.120**

**30.121**

**30.130**

**30.131**

# Content

## EA

112	<b>General information</b>
113	<b>Type illustrations</b>
114	<b>Components</b>
122	<b>Glass preparation</b>
224	<b>Accessories</b>
248	<b>Safety-related information</b>



**EA**

## The expansive range with slimline bodies for offset hung doors

EA patch fittings are characterized by their slim, neat shape and skilful hinge design. This comprehensive range of fittings allows the transparent elegance of single-action doors to reach their full potential – whether hung in frames or integrated in toughened glass assemblies.

### Easy glass preparation secure fixing

dormakaba has an intimate knowledge of the special properties of glass as a building material. This has led to the design of fittings requiring only minimal glass preparation – a quick and easy cut out with additional holes. Carefully considered and positive measures have been taken to create the maximum clamping surface with optimum clamping efficiency.

### Suitable for 10, 12 and 8 mm glass thicknesses

DORMA EA patch fittings are available for 10 and 12 mm glass thicknesses. With additional gaskets these fittings can also be used for 8 mm glass.

### Reliability built in

Quality materials and thorough workmanship mean that EA patch fittings have the features necessary to meet the most demanding of specifications.

### Matching range of locks

The EA range includes a variety of locks and strike boxes in a matching design concept, giving the designer plenty of choice from the options available.

### Virtually unlimited choice of colours and finishes

EA corner patches are available in the following finishes

- Aluminum, silver EV1 anodized (similar Eloxal I EV1 / Eloxal II C 0) (101)
- Aluminum, similar satin stainless steel anodized (107)
- Aluminum special color anodized (199)
- Aluminum, special color powder coated (399)

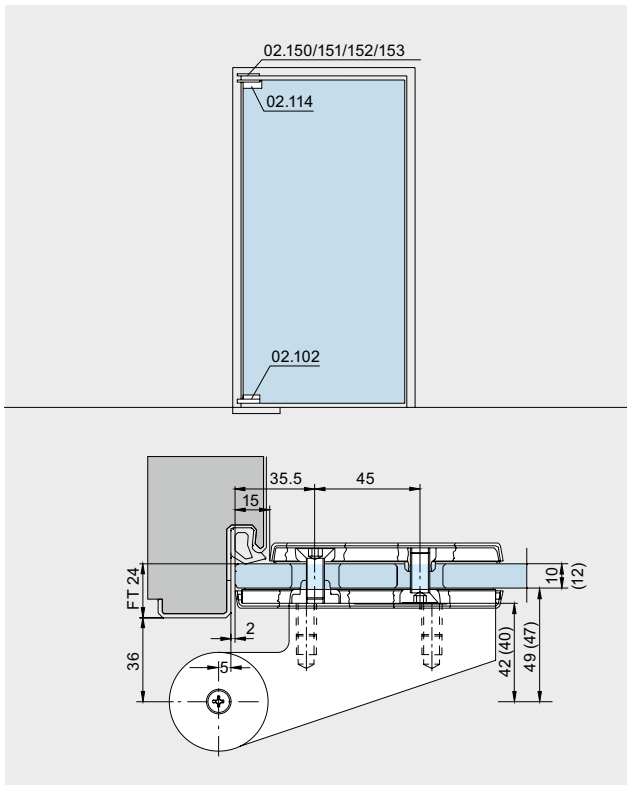
### Short delivery times

All standard articles as per price list are available ex-stock (factory). Specials will be prepared promptly.





# Offset hung doors in rebated frames and toughened glass assemblies



## Offset hung doors in rebated frames

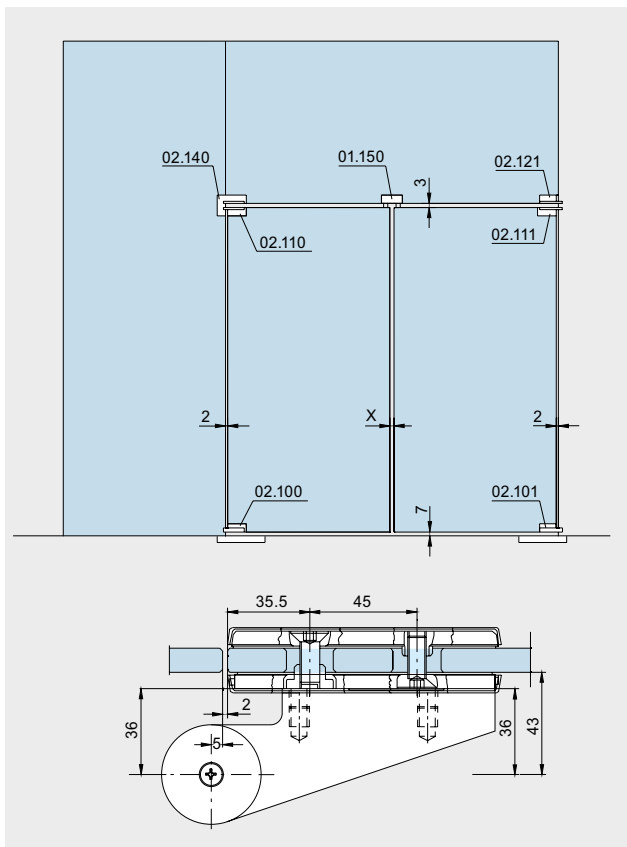
max. door weight: 90 kg  
 max. door width: 1,000 mm,  
 using a bottom door rail: 1,100 mm

EA patch fittings for offset hung doors in rebated frames are supplied as standard prepared for 24 mm rebate depth. They can be prepared to suit rebate depths from 15 – 23 mm, and from 25 – 40 mm. Please specify rebate depth with order.

max. door weight for 25–40 mm rebate depth: 80 kg  
 max. door width for 25–40 mm rebate depth: 900 mm  
 For doors with max. weight of 80 kg and max. width of 1,000 mm use door rails.

The top centre frame portions are prepared to suit wood and steel frames. For aluminum frames, please enquire, giving details of aluminum system.

FT = rebate depth



## Offset hung doors in toughened glass assemblies

max. door weight: 100 kg  
 max. door width: 1,100 mm

For door weights up to 100 kg and widths up to 1,200 mm, door rails should be used.

EA patch fittings for offset hung doors in toughened glass assemblies have a 36 mm offset (= 43 mm from pivot point to glass surface).

### Gap required between leaves on pairs of doors

Individual leaf width in mm	X = gap required in mm
400–600	8
600–1,000	6

### Torque for fixing screws

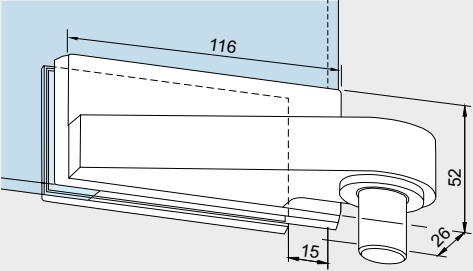
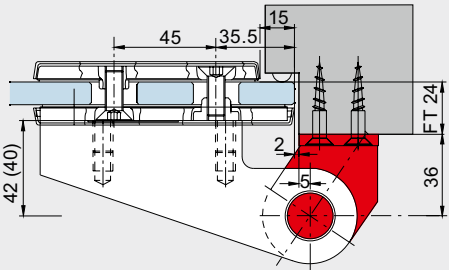
Screws M 8: 12 Nm

# Patch fittings for offset hung doors in rebated frames with 24 mm rebate depth

For 10 mm glass thickness (42 mm offset = 49 mm from pivot point to glass surface), complete.  
 For 12 mm glass thickness (40 mm offset = 47 mm from pivot point to glass surface), complete.  
 Accessories see page 224.

	Product description	Glass thickness	Art. No.
	<b>Bottom patch fitting</b> to suit floor spring spindle, or round pivot 14 mm Ø counter-plate reduced by 15 mm to give free glass edge at side  Weight in kg: Aluminum 0.747	10 mm *02.102/02.103 12 mm *02.160/02.161	
	<b>Bottom patch fitting</b> to suit floor spring spindle, or round pivot 14 mm Ø counter-plate reduced by 15 mm to give free glass edge at side and bottom  Weight in kg: Aluminum 0.715	10 mm *02.104/02.105 12 mm *02.162/02.163	
	<b>Top patch fitting</b> counter-plate reduced by 15 mm to give free glass edge at side  Weight in kg: Aluminum 0.680	10 mm *02.112/02.113 12 mm *02.164/02.165	
	<b>Top patch fitting</b> counter-plate reduced by 15 mm to give free glass edge at side and top  Weight in kg: Aluminum 0.644	10 mm *02.114/02.115 12 mm *02.166/02.167	

\* Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Product description	Glass thickness	Art. No.
	10 mm 12 mm	*02.122/02.123 *02.168/02.169
<p><b>Overpanel patch fitting</b>            counter-plate reduced by 15 mm to give free glass edge at side, bushing outside Ø 20 mm, pivot Ø 15 mm</p>		
Weight in kg: Aluminum 0.654		
	10 mm 12 mm	*02.206/02.207 *02.170/02.171
<p><b>Top patch fitting</b>            complete with pivot for frame fixing, counter-plate reduced by 15 mm to give free glass edge at side</p>		
Weight in kg: Aluminum 0.915		
<p>*Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)</p>		

# Patch fittings for offset hung doors in rebated frames with individual frame stop depth

**Please specify rebate depth with order.**

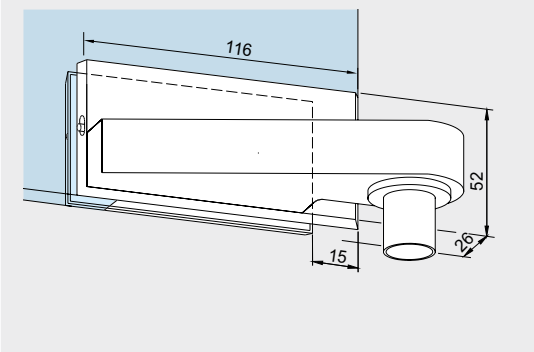
Rebate depth X = distance between outer surface of frame and rebate/stop (15 to 23 resp. 25 to 40 mm).  
 Offset = rebate depth + 18 mm (33 to 41 resp. 43 to 58 mm). Complete, for 10 mm glass thickness.  
 Accessories see page 224.

	Product description	Art. No.
	<p><b>Bottom patch fitting</b>                      to suit floor spring spindle or round pivot                      14 mm Ø, counter-plate reduced by                      15 mm to give free glass edge at side</p> <p>Weight in kg:                      Aluminum 0.832</p>	<p><b>*02.106/02.107</b></p>
	<p><b>Bottom patch fitting</b>                      to suit floor spring spindle or round pivot                      14 mm Ø, counter-plate reduced by                      15 mm to give free glass edge at side and bottom</p> <p>Weight in kg:                      Aluminum 0.800</p>	<p><b>*02.108/02.109</b></p>
	<p><b>Top patch fitting</b>                      counter-plate reduced by                      15 mm to give free glass edge at side</p> <p>Weight in kg:                      Aluminum 0.760</p>	<p><b>*02.116/02.117</b></p>
	<p><b>Top patch fitting</b>                      counter-plate reduced by                      15 mm to give free glass edge at side and top</p> <p>Weight in kg:                      Aluminum 0.728</p>	<p><b>*02.118/02.119</b></p>

\*Order of Art.No.: Left hand / right hand – determined by view from hanging side.  
 (Illustration shows right hand)

## Product description


## Art. No.

**Overpanel patch fitting**

counter-plate reduced by  
15 mm to give free glass edge at side

\*02.124/02.125

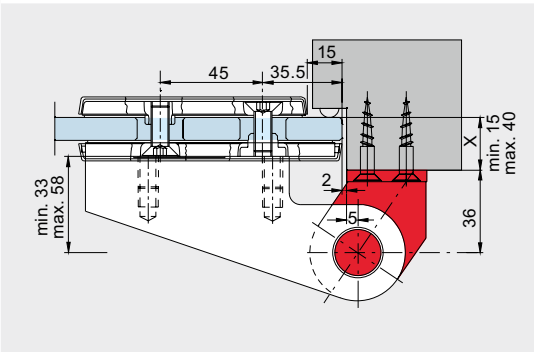Weight in kg:  
Aluminum 0.724

**Top patch fitting**

complete with pivot for frame fixing,  
counter-plate reduced by 15 mm to give free  
glass edge at side





\*02.208/02.209

Weight in kg:  
Aluminum 0.995

\*Order of Art.No.: Left hand / right hand – determined by view from hanging side.  
(Illustration shows right hand)

# Patch fittings for offset hung doors in toughened glass assemblies

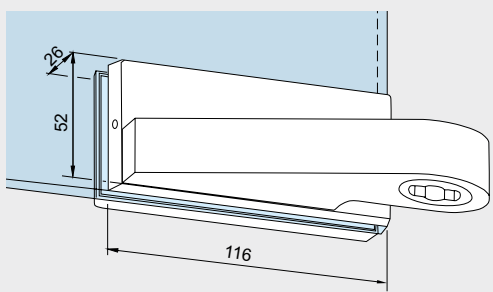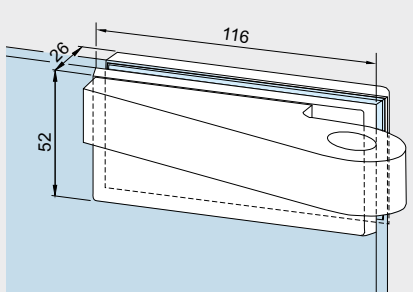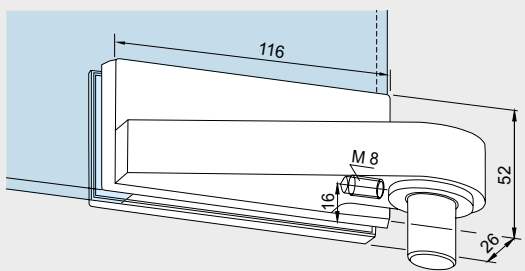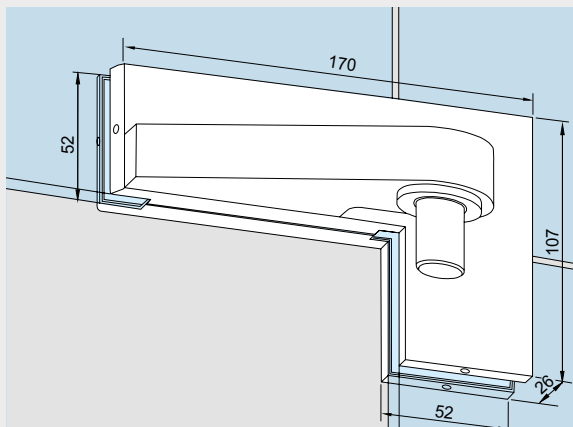
(36 mm offset = 43 mm from pivot point to glass surface), complete, for 10 and 12 mm glass thickness.

	Product description	Art. No.
	<p><b>Bottom patch fitting</b> to suit floor spring spindle, or round pivot 14 mm Ø</p> <p>Weight in kg: Aluminum 0.730</p>	<p><b>*02.100/02.101</b></p>
	<p><b>Top patch fitting</b></p> <p>Weight in kg: Aluminum 0.660</p>	<p><b>*02.110/02.111</b></p>
	<p><b>Overpanel patch fitting</b> bushing outside Ø 20 mm, pivot Ø 15 mm</p> <p>Weight in kg: Aluminum 0.637</p>	<p><b>*02.120/02.121</b></p>
	<p><b>Patch fitting for overpanel and sidelight</b> bushing outside Ø 20 mm, pivot Ø 15 mm</p> <p>Weight in kg: Aluminum 0.832</p>	<p><b>*02.140/02.141</b></p>

\* Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

## Product description

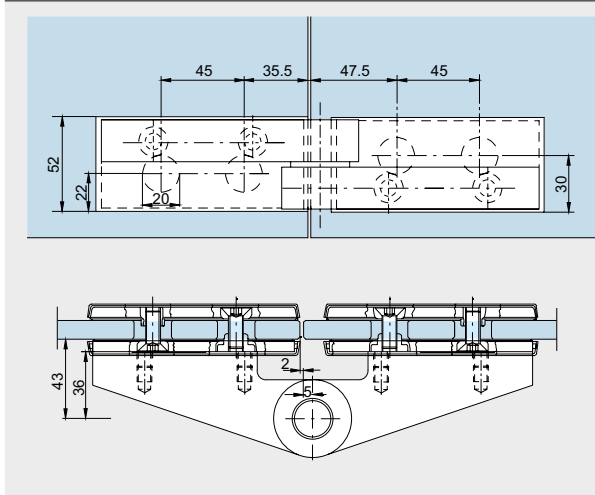Art. No.



**Top patch fitting**

complete with pivot for sidelight

**\*02.200/02.201**

Weight in kg:

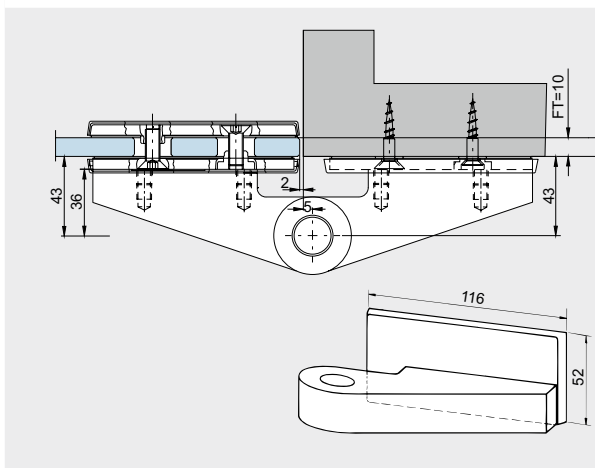Aluminum 1.415



**Top patch fitting**

complete with pivot for wall fixing

**\*02.202/02.203**

Weight in kg:

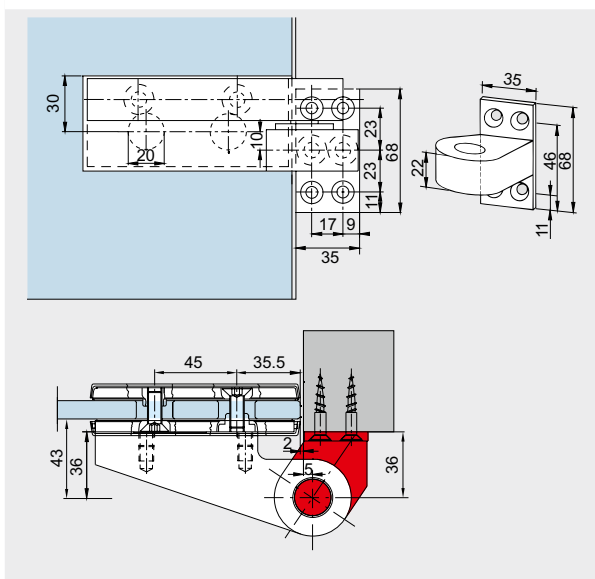Aluminum 1.277


**Top patch fitting**

complete with pivot for frame fixing

**\*02.204/02.205**





Weight in kg:

Aluminum 0.895





\* Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

# Top centres for wood and steel frames

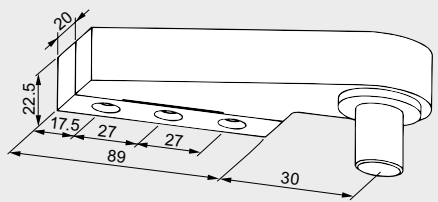
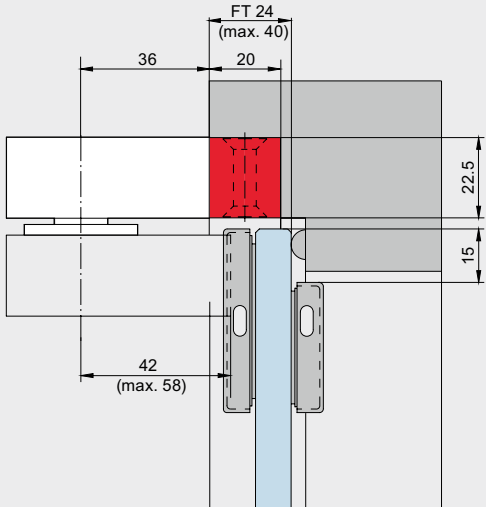
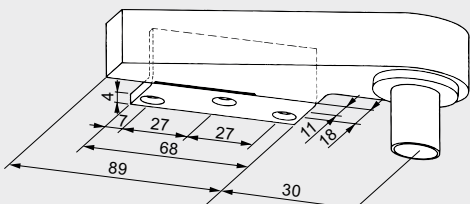
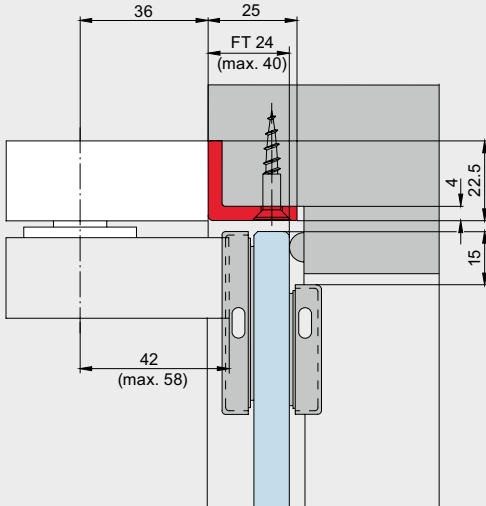
	Product description	Art. No.
 	<p><b>Frame top centre</b> with fixing block</p> <p><b>02.150</b></p> <p>Weight in kg: Aluminum 0.471</p> <p>(If corner fittings / door rails are combined with frame top centres as described, please indicate rebate depth with order.)</p>	
 	<p><b>Frame top centre</b> with angle bracket</p> <p><b>02.151</b></p> <p>Weight in kg: Aluminum 0.453</p>	

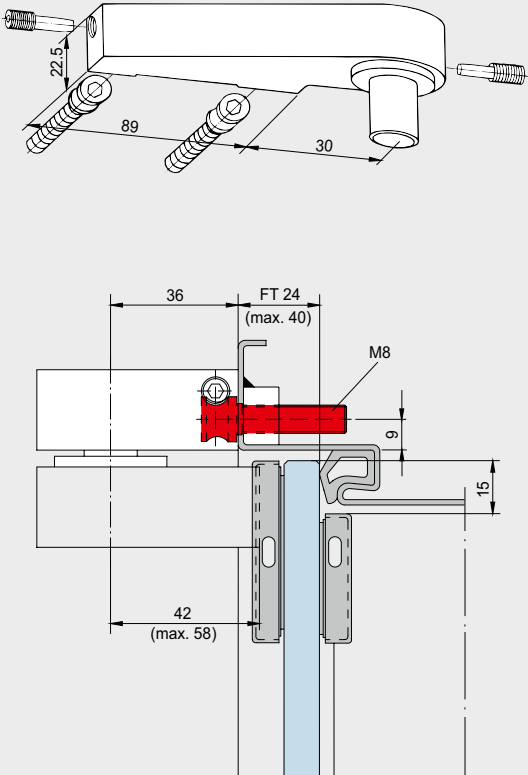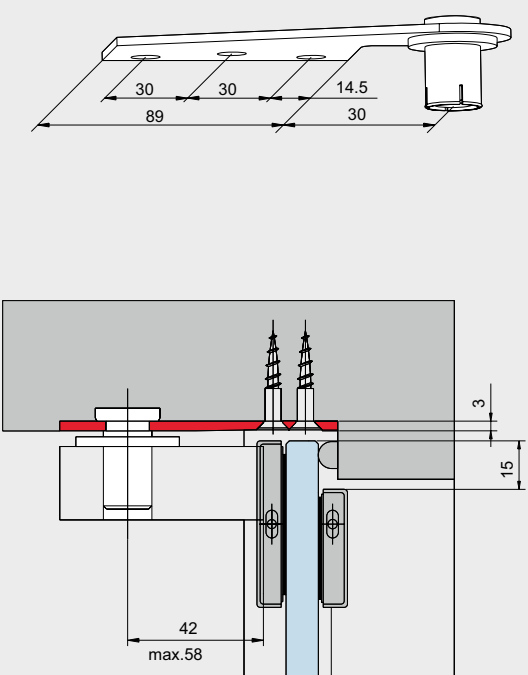

	Product description	Art. No.
	<p><b>Frame top centre</b> only for steel frames, with special wedge screw fixing</p> <p>Weight in kg: Aluminum 0.390</p> <p><b>Drill jig:</b></p>	<p><b>*02.152/02.153</b></p> <p><b>8.02.081.001.50</b></p>
	<p><b>Frame top centre AT 212 GSR</b> with mounting plate</p> <p>Weight in kg: Stainless steel 0.215</p>	<p><b>*02.340/02.341</b></p>

\*Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

# Glass preparation

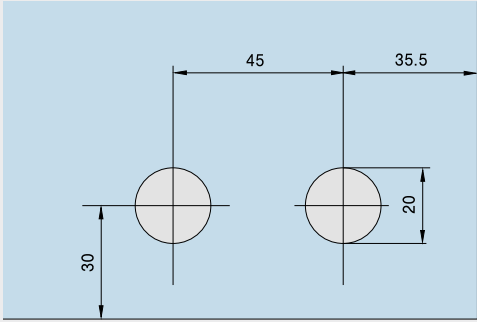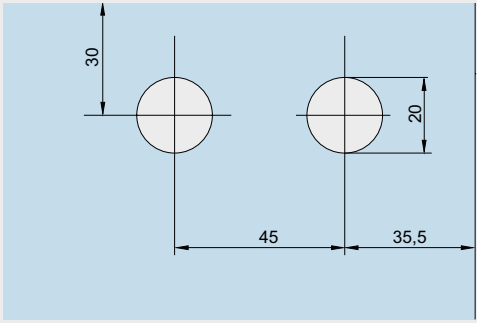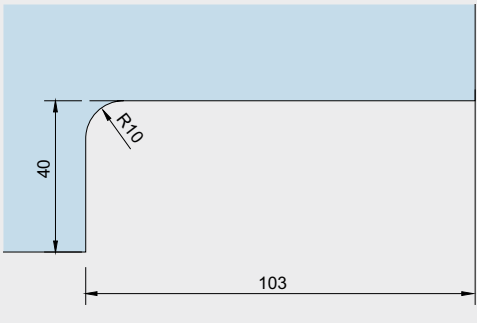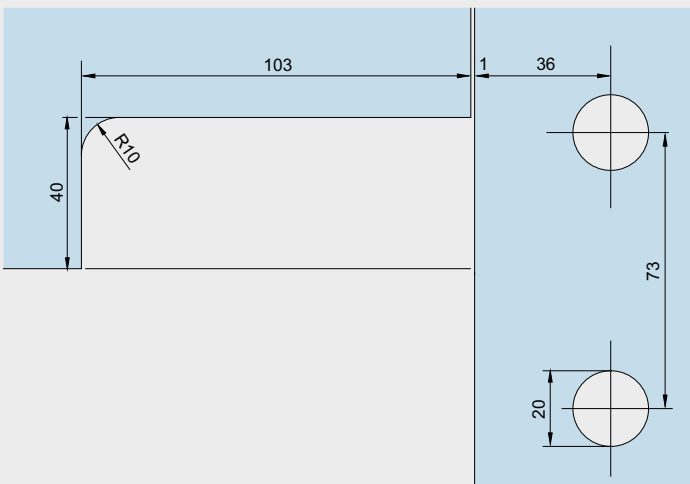	Product description	Art. No.	
	<b>Bottom patch fittings</b>	left	
			02.100
			02.102
			02.104
			02.106
			02.108
			02.160
			02.162
			right
			02.101
			02.103
			02.105
			02.107
			02.109
		02.161	
		02.163	
	<b>Top patch fittings</b>	left	
			02.110
			02.112
			02.114
			02.116
			02.118
			02.164
			02.166
			right
			02.111
			02.113
			02.115
			02.117
			02.119
		02.165	
		02.167	
	<b>Overpanel patch fittings</b>	left	
			02.120
			02.122
			02.168
			right
			02.121
		02.123	
		02.169	
	<b>Patch fittings for overpanel and sidelight</b>	left	
			02.140
			right
			02.141
			Scale 1 : 2

# Space for your notes

# Content

## TP/TA

126	<b>General information</b>
127	<b>Type illustrations</b>
130	<b>Components</b>
224	<b>Accessories</b>
248	<b>Safety-related information</b>

The door rail range shown on the following pages will be available until the end of 2020. In parallel, a new door rail program "Door rails TP/TA EASY Safe" will be introduced at the beginning of 2020. Please ask for the separate documents.



**TP/TA**

## TP/TA – door rails which leave nothing to be desired

TP / TA door and side panel rail coordinate in design, dimensions and finishes with all dormakaba patch fittings. This creates the opportunity to specify fittings for the assembly which provide maximum protection and effective sealing of the lower glass edges. The provision of door rails allows the installation of extremely heavy-duty and wide doors.

### Tamper resistant, with integral locks

The robust base rails are screwed together from alternate sides of the door at 150 mm centres. This makes unauthorised removal of the rail virtually impossible. All door rails are available with integral locks, prepared for profile cylinders and with security rosettes, or prepared for certain lever locks.

### Special security- and quality characteristics

The particular feature of the locks with bottom or top locking bolt is a special corrosion and abrasion resistant bolt with integrated safety roll pin (hardened). By this the locks comply to DIN 18251, class 3 (according to type testing\*) and the highest corrosion resistance according to EN 1670, class 4 is achieved. Furthermore the lock was tested successfully by a neutral testing institute with 500,000 latch and 100,000 locking bolt operating cycles.

### Easy door adjustment – especially whilst hanging

Because TP / TA rails are a screw/clamp system, they have a great advantage over other systems. The rail can be adjusted up and down, and also side to side, to compensate for irregularities in the door opening. Also, the clip-on rail cover has advantages. Because the door can be hung and secured without it, the covers need not be fixed until the wet trades have finished and the cleaners have been through.



### No glass preparation, firm fixing

dormakaba has an intimate knowledge of the special properties of glass as a building material. This has led to the design of rails requiring no glass preparation – no holes, no cut-outs. Carefully considered and positive measures have been taken to create the maximum clamping surface with optimum clamping efficiency.

### Two heights, length to order, to suit 10 mm or 8 mm and 12 mm

glass thickness – further glass thicknesses and versions for bullet-proof glass on request  
All TP / TA door rails are available in 100 mm (4") or 76.5 mm (3") heights, and in lengths to your order. They are supplied as standard for 10 mm glass thickness; but with replacement gasket they will suit 12 mm or 8 mm glass thicknesses. On request the door rails of 100 mm height can also be realised for 13.5/15/17/19 and 21 mm glass thicknesses (for toughened, laminated glass) and versions for bullet-proof glass 13.5 – 30 mm glass thicknesses.

### Variable pivot point and absolute pinch free on door rails for centre hung doors TP

All the inserts for door rails in the TP / TA range have been designed and manufactured to give two options in the pivot point distance from the sidepanel or frame. It can be either 55 mm or 65 mm (distance from pivot point to door edge – 53 mm and 63 mm respectively). In order to change from the standard dimension of 65 mm to 55 mm, the standard insert is unscrewed from the patch, rotated through 180°, and refixed in position. At 65 mm pivot point and the use of a special round profile (page 146) doors can be built pinch free (constant air gap of 4 mm).

### Reliability built in

Quality materials and thorough workmanship mean that TP / TA rails have the features necessary to meet the most demanding of specifications.

### Short delivery times

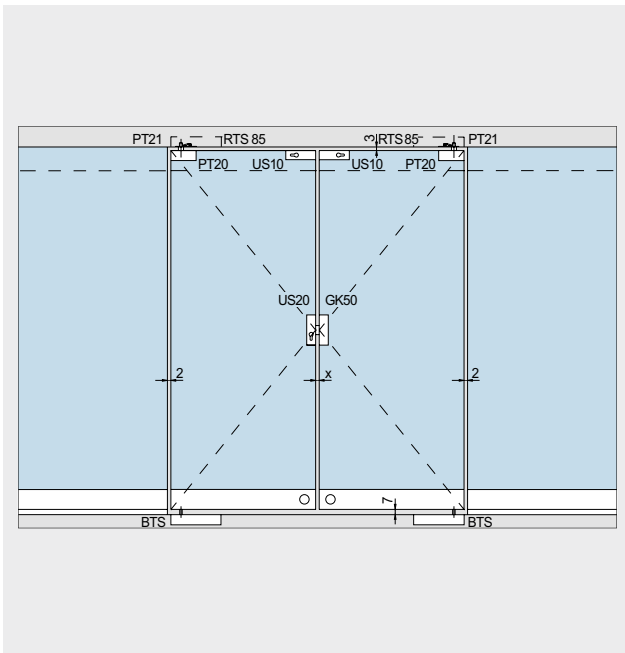
All standard articles as per price list are available ex-stock (factory). Specials will be prepared promptly.

### Finishes

Special coatings are required at extreme environment conditions (i.e. coastal areas).

\*Extract from DIN 18251, class 3: type-test with 50,000 locking bolt operating cycles.

# Technical specifications



## Glass size – height:

Rail height – 100 mm		Rail height – 76.5 mm	
Use of rail(s)	total door height less	Use of rail(s)	total door height less
bottom	75.0 mm	bottom	56.5 mm
top	75.0 mm	top	56.5 mm
bottom + top	150.0 mm	bottom + top	113.0 mm

Please treat floor and ceiling clearances separately

## Gap required between pairs of doors:

### Offset hung doors:



Individual leaf width	X
over 1,000 mm	4 mm
1,000–600 mm	6 mm
600–400 mm	8 mm

### Centre hung doors:

X = 4 mm


RTS = transom closer

## Maximum dimensions for use of bottom door rails in combination with top door rails or top patch fittings

	Panel type	Bottom door rail standard			Bottom door rail special type with bottom strap in forged steel			Comments
		weight kg	width mm	height mm	weight kg	width mm	height mm	
Door rails for centre hung doors, combined with...	 							*For high frequented doors we generally recommend to use the bottom strap in forged steel with reduced max. measurements. **pivot point 15/18 mm ***only for double-action doors with door rail top and bottom
<b>... Patch fittings UNIVERSAL</b>	●	110	1,200	3,000	120	1,200	3,500	
<b>... Patch fittings EP UNIVERSAL pinch</b>	●	100	1,100	3,000				
<b>... Door rails standard</b>	●	120	1,200	3,500	150*** (120*)	1,400*** (1,200*)	4,000 (3,500*)	
Door rails for offset hung doors in toughened glass assemblies, combined with...								34 mm door stap for toughened glass assemblies
<b>... Patch fittings EA</b>	●	100	1,200	3,000				40 mm/42 mm door stap for 24 mm/26 mm rebate depth
<b>... Door rails standard</b>	●	100	1,200	3,500				
Door rails for offset hung doors in rebated frames (24 mm/26 mm rebate depth), combined with ...								43 mm/58 mm door stap for 27 mm–40 mm rebate depth
<b>... Patch fittings EA</b>	●	90	1,100	3,000				
<b>... Door rails standard</b>	●	90	1,100	3,500				
Door rails for offset hung doors in rebated frames (27 mm – 40 mm rebate depth), combined with ...								43 mm/58 mm door stap for 27 mm–40 mm rebate depth
<b>... Patch fittings EA</b>	●	80	1,000	3,000				
<b>... Door rails standard</b>	●	80	1,000	3,500				


Torque for fixing screws: Screws M 8 : 20 Nm

# Rail cross sections

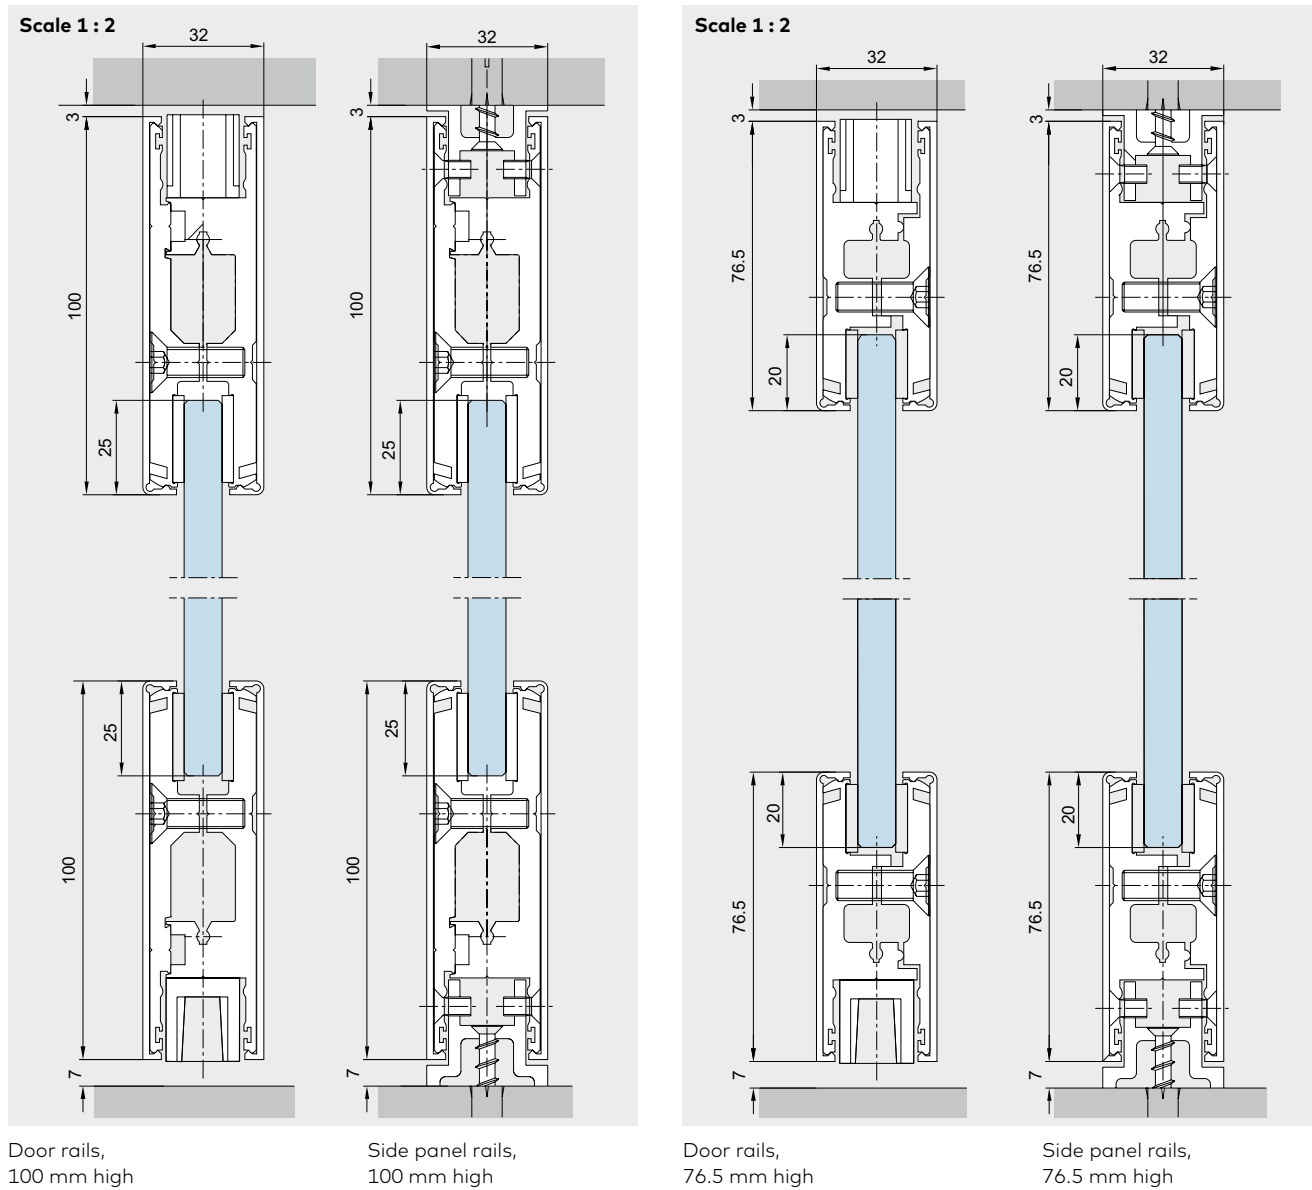

**Product description**

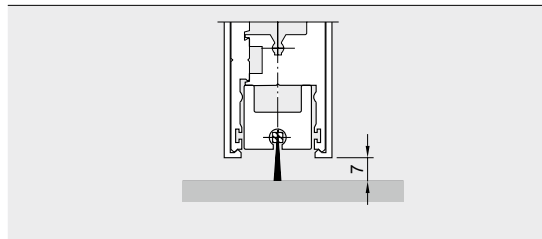
**Art. No.**



**AGILE Aluminum profile brush seal** to prevent draughts and energy loss (not in the area of inserts, locks, etc.), connected with door rail at manufacturer

**04.600**

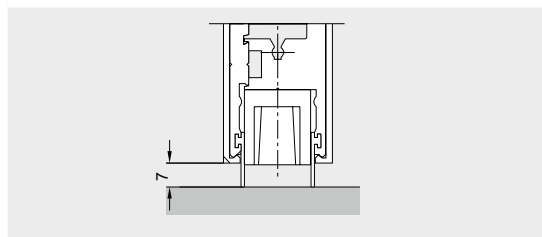Weight in kg/m: 0.753



**Rubber sealing**

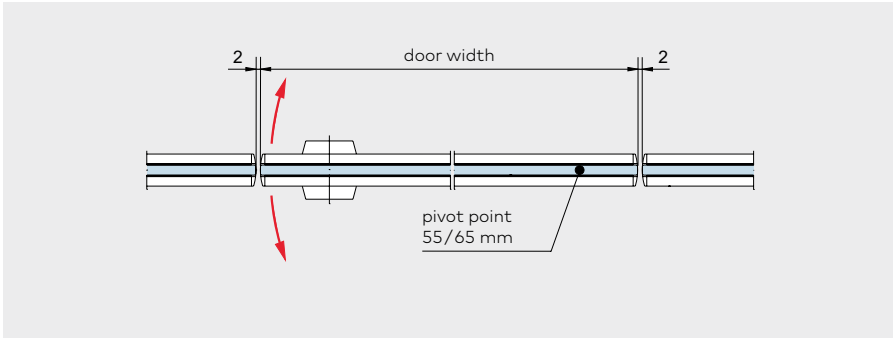
for door rails (also in the area of inserts, locks, etc.)  
fixed length  
stock length 200 m (= 1 coil)

**04.607**  
**04.608**


Weight in kg/m: 0.099




# Construction details




Centre hung doors

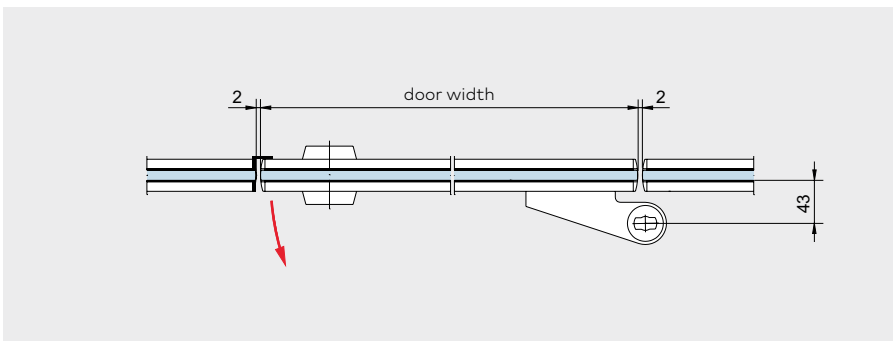

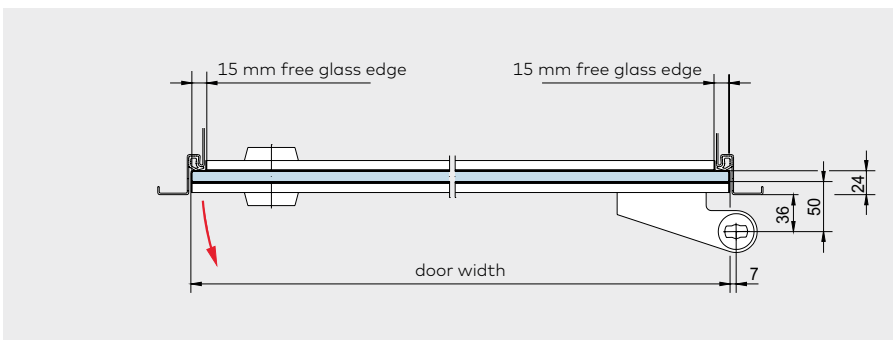
Offset hung door in toughened glass assembly



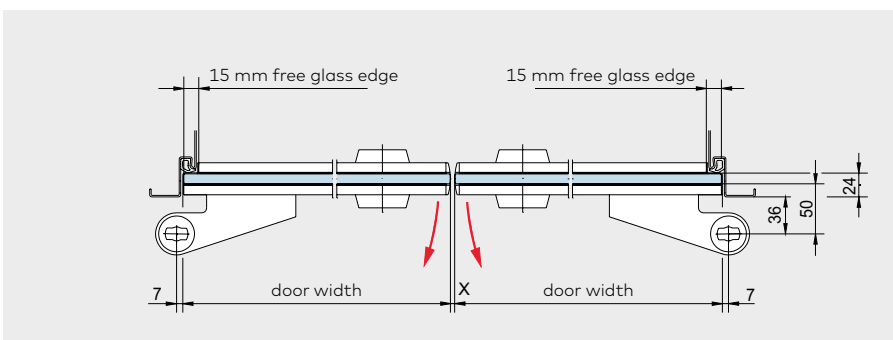Offset hung door in rebated frame with 24 mm rebate depth



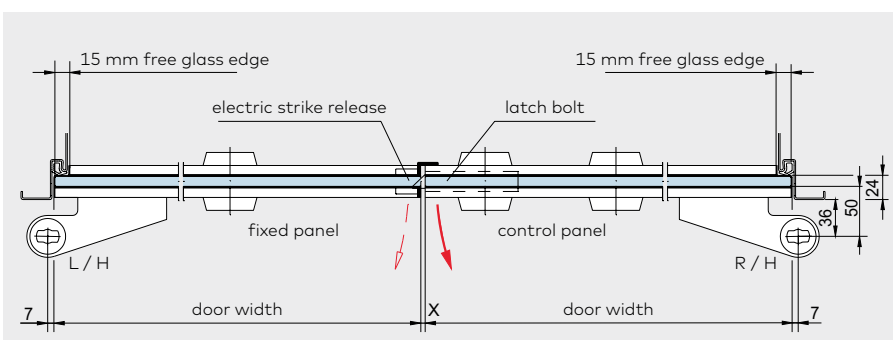Pair of offset hung doors in rebated frame with 24 mm rebate depth







Pair of offset hung doors in rebated frame with 24 mm rebate depth (also available with inserts for centre hung doors), with electric strike release and latch bolt





X = Gap, see table page 127.

# Door rails for offset hung doors in toughened glass assemblies without rebated frames

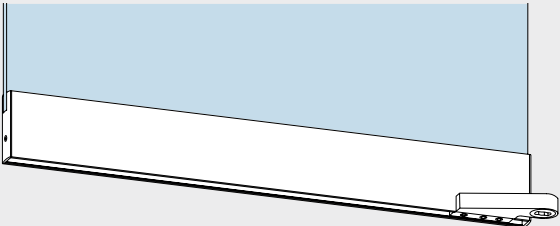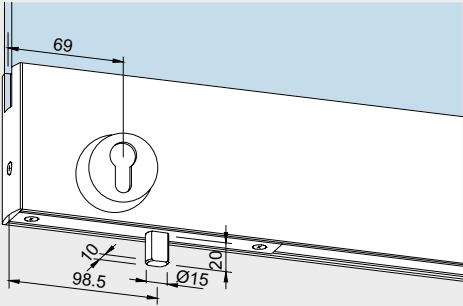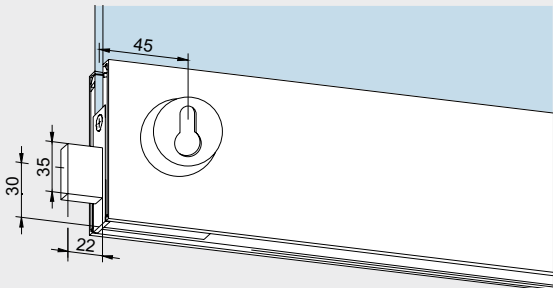
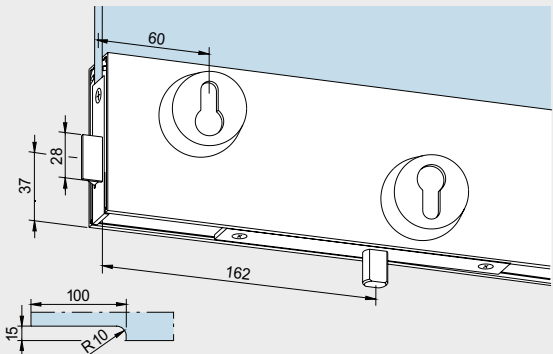
Complete, for 10 mm glass thickness, strap 34 mm, without free glass edges, pivot point to glass surface 43 mm

	Product description	Art. No.
	<b>Bottom rail</b> 100 mm:	<b>*04.131/04.133</b>
	Weight in kg/m: Aluminum 5.359 Stainless steel 6.792  76.5 mm:	<b>*04.031/04.033</b>
	<b>...with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin</b>  100 mm:	<b>*04.151/04.153</b>
	Weight in kg/m: Aluminum 5.694 Stainless steel 7.242  76.5 mm:	<b>*04.051/04.053</b>
	<b>...with side locking lock, prepared for Europrofile cylinder, double throw</b>  100 mm:	<b>*04.171/04.173</b>
	Weight in kg/m: Aluminum 5.592 Stainless steel 7.140	
	<b>...with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and latch bolt at side for electric strike release</b>  100 mm:	<b>*04.179/04.181</b>
	Weight in kg/m: Aluminum 6.890 Stainless steel 8.563	

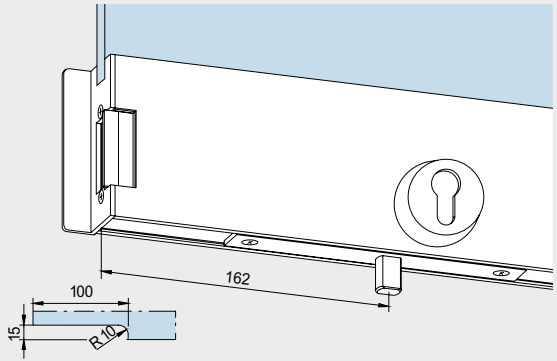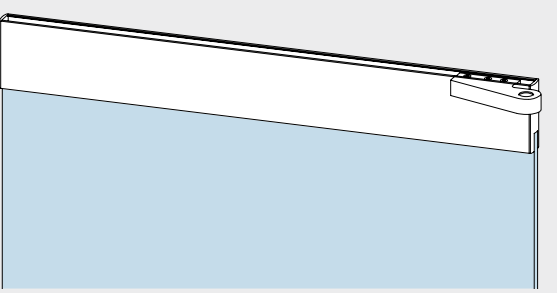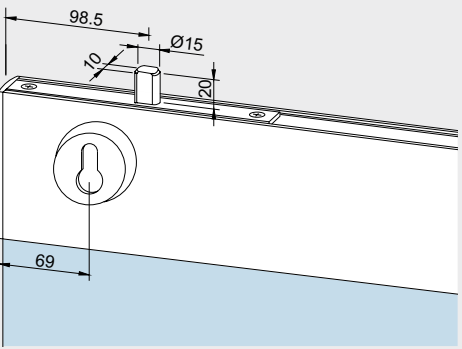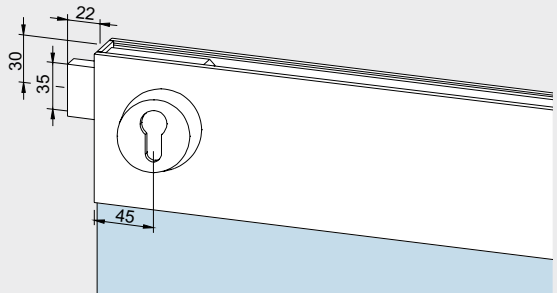\* Left / right hand (illustration shows right hand) are determined by view from hanging side.

	Product description	Art. No.
	<p><b>Bottom rail</b> with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and electric strike release at side (Standard: fail secure function, 6 to 12 V -/-)</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.837 Stainless steel 7.385</p>	<p><b>*04.183/04.185</b> (zu Art. No. 4.181/04.179)</p>
	<p><b>Top rail</b></p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.289 Stainless steel 6.759</p> <p>76.5 mm:</p> <p>Weight in kg/m: Aluminum 4.187 Stainless steel 5.522</p>	<p><b>*04.132/04.134</b></p> <p><b>*04.032/04.034</b></p>
	<p>...with top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.624 Stainless steel 7.209</p> <p>76,5 mm:</p> <p>Weight in kg/m: Aluminum 4.522 Stainless steel 5.972</p>	<p><b>*04.152/04.154</b></p> <p><b>*04.052/04.054</b></p>
	<p>...with side locking lock, prepared for Europrofile cylinder, double throw</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.522 Stainless steel 7.107</p>	<p><b>*04.172/04.174</b></p>

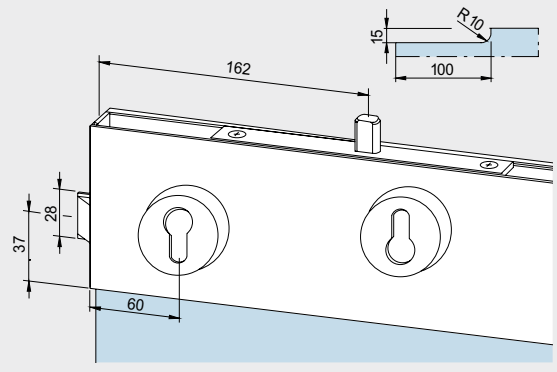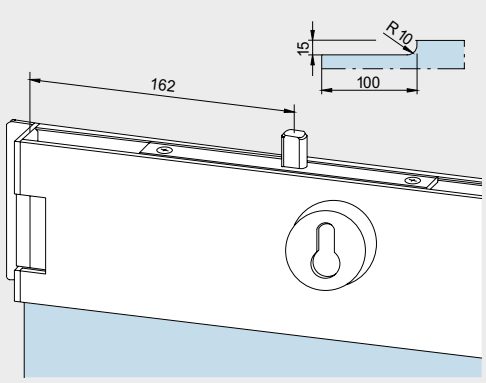\* Left / right hand (illustration shows right hand) are determined by view from hanging side.

	Product description	Art. No.
	<p><b>Top rail</b> with top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and latch bolt at side for electric strike release</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 6.820 Stainless steel 8.530</p>	<p><b>**04.180/04.182</b></p>
	<p>...with top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and electric strike release (Standard: fail secure function, 6 to 12 V -/-)</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.767 Stainless steel 7.352</p>	<p><b>*04.184/04.186</b> (for Art. No. 04.182/04.180)</p>





\* Left / right hand (illustration shows right hand) are determined by view from hanging side.

\*\* Left / right hand (illustration shows left hand) are determined by view from hanging side.

# Door rails for offset hung doors in rebated frames
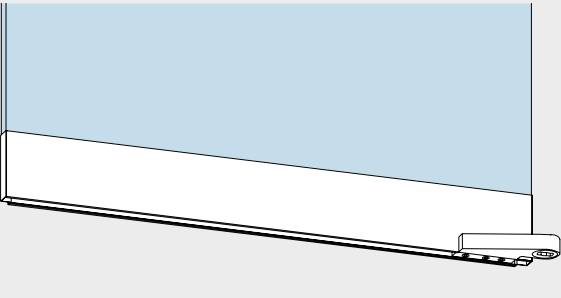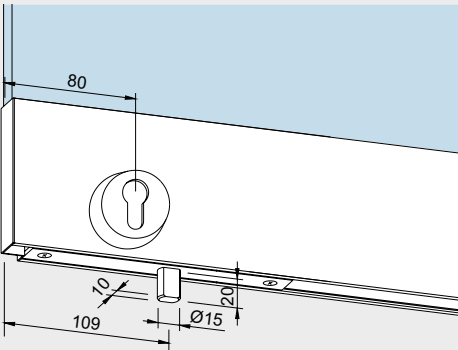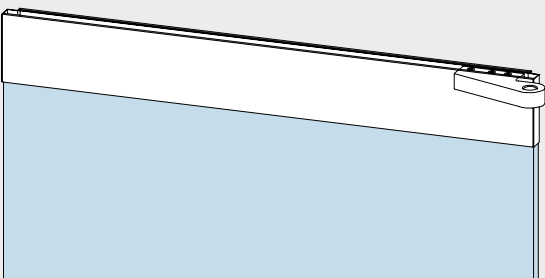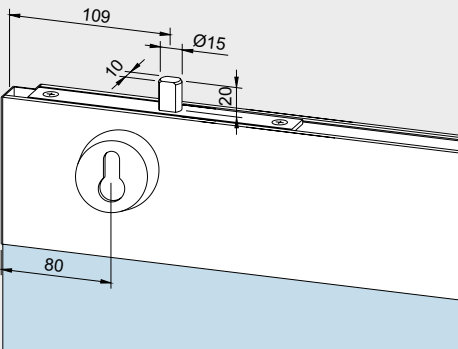
## With 24 mm rebate depth

Complete, for 10 mm glass thickness, strap 40 mm, with free glass edge left and right, pivot point to glass surface 50 mm  
 Also available for rebate depths up to 40 mm.  
 If required, please talk to our Application Engineering people.




	Product description	Art. No.
	<p><b>Bottom rail</b></p> <p>100 mm: <b>*04.135/04.137</b></p> <p>Weight in kg/m:                      Aluminum 5.251                      Stainless steel 6.602</p> <p>76.5 mm: <b>*04.035/04.037</b></p> <p>Weight in kg/m:                      Aluminum 4.181                      Stainless steel 5.407</p>	
	<p>...with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm: <b>*04.155/04.157</b></p> <p>Weight in kg/m:                      Aluminum 5.586                      Stainless steel 7.052</p> <p>76.5 mm: <b>*04.055/04.057</b></p> <p>Weight in kg/m:                      Aluminum 4.516                      Stainless steel 5.857</p>	
	<p><b>Top rail</b></p> <p>100 mm: <b>*04.136/04.138</b></p> <p>Weight in kg/m:                      Aluminum 5.181                      Stainless steel 6.569</p> <p>76.5 mm: <b>*04.036/04.038</b></p> <p>Weight in kg/m:                      Aluminum 4.111                      Stainless steel 5.374</p>	
	<p>...with top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm: <b>*04.156/04.158</b></p> <p>Weight in kg/m:                      Aluminum 5.516                      Stainless steel 7.019</p> <p>76.5 mm: <b>*04.056/04.058</b></p> <p>Weight in kg/m:                      Aluminum 4.446                      Stainless steel 5.824</p>	

\* Left / right hand (illustration shows right hand) are determined by view from hanging side.

# Door rails for double offset hung doors in rebated frames
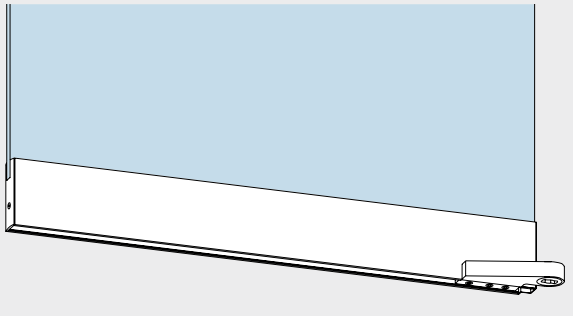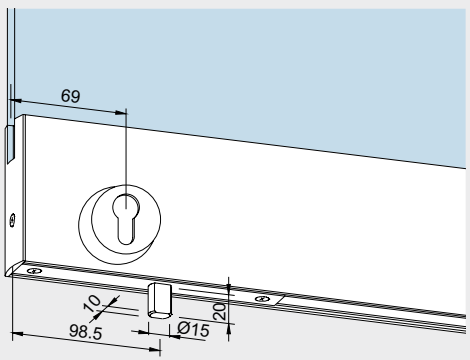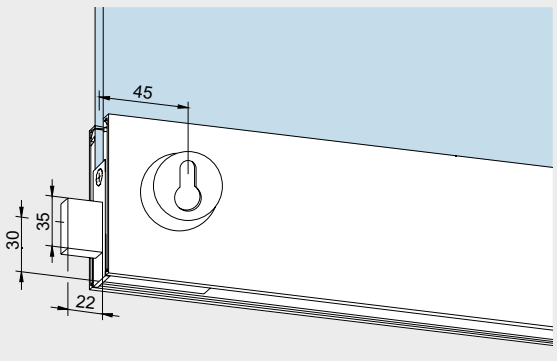
## With 24 mm rebate depth


Complete, for 10 mm glass thickness, strap 40 mm, with 15 mm free glass edge of hanging stile, pivot point to glass surface 50 mm

	Product description	Art. No.
	<p><b>Bottom rail</b> 100 mm:</p> <p>Weight in kg/m: Aluminum 5.305 Stainless steel 6.507</p> <p>76.5 mm:</p> <p>Weight in kg/m: Aluminum 4.219 Stainless steel 5.482</p>	<p><b>*04.139/04.141</b></p> <p><b>*04.039/04.041</b></p>
	<p>...with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.640 Stainless steel 6.957</p> <p>76.5 mm:</p> <p>Weight in kg/m: Aluminum 4.554 Stainless steel 5.932</p>	<p><b>*04.159/04.161</b></p> <p><b>*04.059/04.061</b></p>
	<p>...with side locking lock, prepared for Europrofile cylinder, double throw</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.538 Stainless steel 6.855</p>	<p><b>*04.175/04.177</b></p>

\* Left / right hand (illustration shows right hand) are determined by view from hanging side.

**Product description**

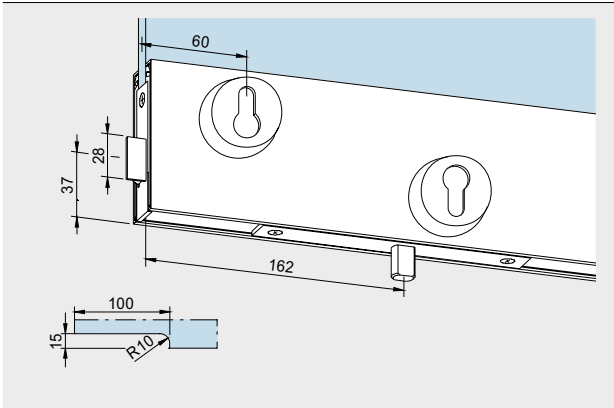**Art. No.**



**Bottom rail**

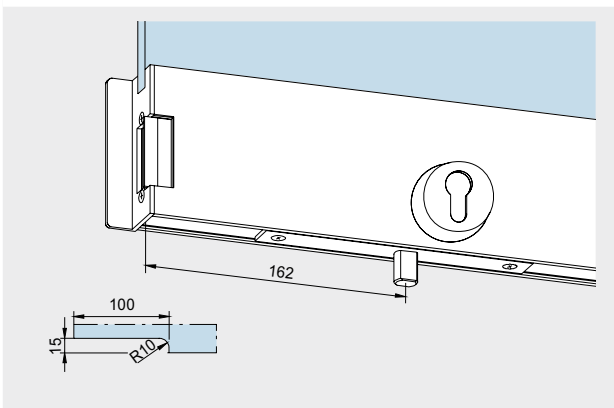
with floor locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and latch lock at side for electric strike release

100 mm:

**\*04.143/04.145**

Weight in kg/m:

Aluminum	5.803
Stainless steel	7.306



...with floor locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and electric strike release at side (Standard: fail secure function, 6 to 12 V -/-)




100 mm:

**\*04.147/04.149**

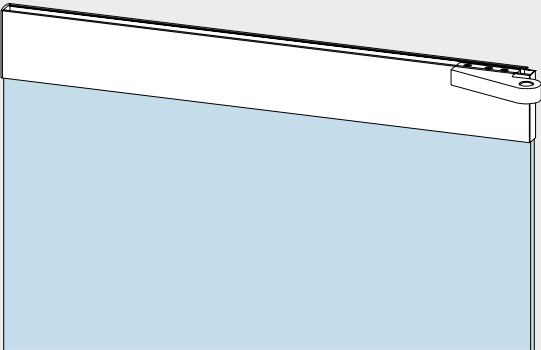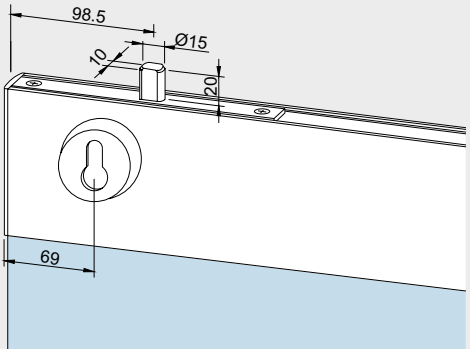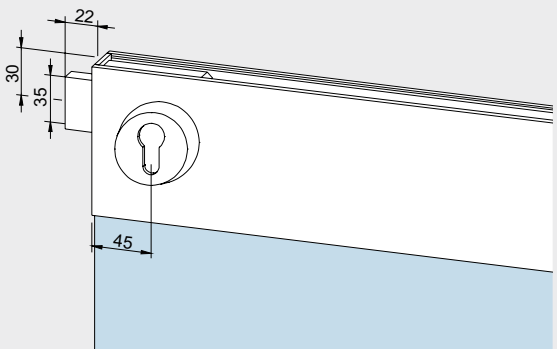Weight in kg/m:

Aluminum	5.653
Stainless steel	7.150

\* Left / right hand (illustration shows right hand) are determined by view from hanging side.


	Product description	Art. No.
	<p><b>Top rail</b> 100 mm:</p> <p>Weight in kg/m: Aluminum 5.235 Stainless steel 6.474</p> <p>76.5 mm:</p> <p>Weight in kg/m: Aluminum 4.149 Stainless steel 5.449</p>	<p><b>*04.140/04.142</b></p> <p><b>*04.040/04.042</b></p>
	<p>...with top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.570 Stainless steel 6.924</p> <p>76.5 mm:</p> <p>Weight in kg/m: Aluminum 4.484 Stainless steel 5.899</p>	<p><b>*04.160/04.162</b></p> <p><b>*04.060/04.062</b></p>
	<p>...with side locking lock, prepared for Europrofile cylinder, double throw</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.468 Stainless steel 6.822</p>	<p><b>*04.176/04.178</b></p>

\* Left / right hand (illustration shows right hand) are determined by view from hanging side.



**Product description**

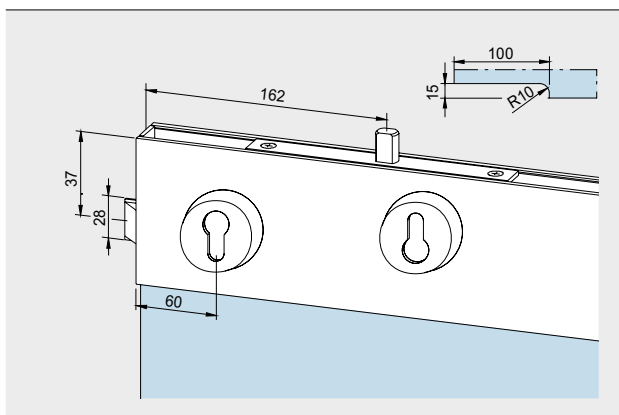**Art. No.**




**Top rail**

with top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and latch bolt at side for electric strike release

100 mm:

Weight in kg/m:  
 Aluminum 5.733  
 Stainless steel 7.236

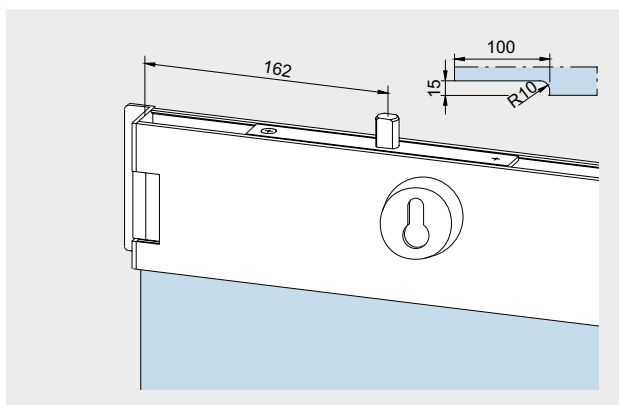**\*04.144/04.146**



...with top locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and electric strike release at side (Standard: fail secure function, 6 to 12 V -/-)

100 mm:

Weight in kg/m:  
 Aluminum 5.583  
 Stainless steel 7.080

**\*\*04.148/04.150**  
 (for Art. No.  
 04.182/04.180)




\*Left / right hand (illustration shows left hand) are determined by view from hanging side




\*\*Left / right hand (illustration shows right hand) are determined by view from hanging side.

# Door rails for double-action doors

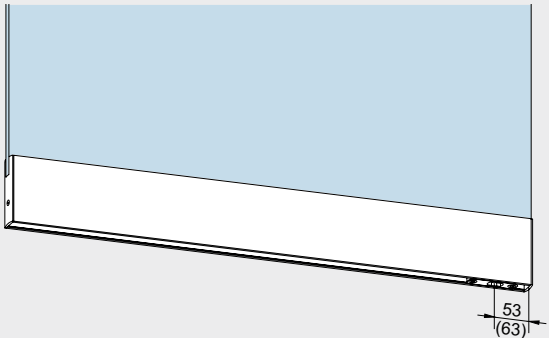
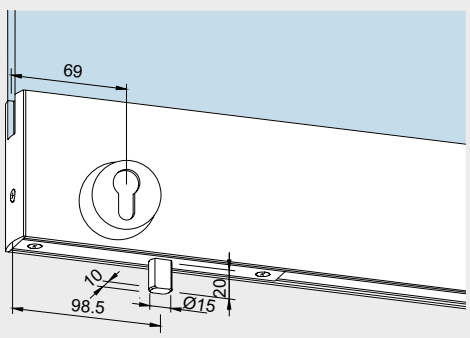
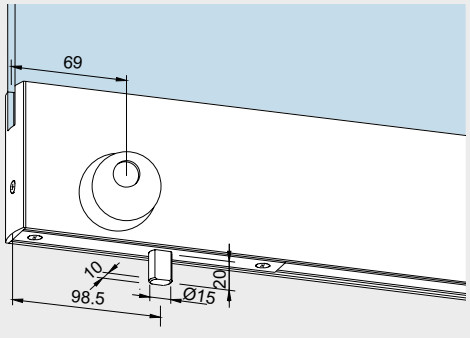
## Pivot point 55/65 mm





Complete, for 10 mm glass thickness

	Product description	Art. No.
	<p><b>Bottom rail</b> with stainless steel insert to suit floor spring spindle or round pivot 14 mm Ø</p> <p>100 mm: <span style="float: right;"><b>04.101</b></span></p> <p>Weight in kg/m: Aluminum 5.131 Stainless steel 6.070</p> <p>76.5 mm: <span style="float: right;"><b>04.001</b></span></p> <p>Weight in kg/m: Aluminum 4.029 Stainless steel 4.833</p>	
	<p>...with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm: <span style="float: right;"><b>04.111</b></span></p> <p>Weight in kg/m: Aluminum 5.466 Stainless steel 6.520</p> <p>76.5 mm: <span style="float: right;"><b>04.011</b></span></p> <p>Weight in kg/m: Aluminum 4.364 Stainless steel 5.283</p>	
	<p>...with floor locking lock, prepared for KABA, single throw with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm: <span style="float: right;"><b>04.163</b> (not illustr.)</span></p> <p>Weight in kg/m: Aluminum 5.466 Stainless steel 6.520</p> <p>76.5 mm: <span style="float: right;"><b>04.063</b> (not illustr.)</span></p> <p>Weight in kg/m: Aluminum 4.364 Stainless steel 5.283</p>	

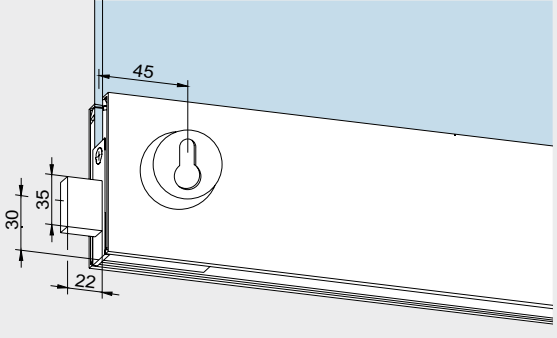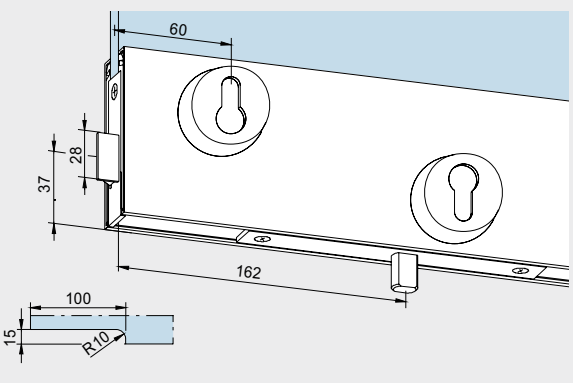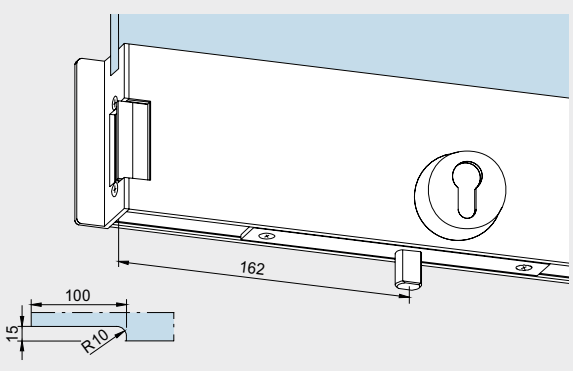	Product description	Art. No.
	<p>...with side locking lock, prepared for Europrofile cylinder, double throw</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.364 Stainless steel 6.418</p>	<p><b>04.121</b></p>
	<p><b>Bottom rail</b></p> <p>with latch lock at side for electric strike release and floor locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin. The use of latch lock or electric strike release results from a single-action door situation.</p> <p>Weight in kg/m: Aluminum 6.667 Stainless steel 8.335</p>	<p><b>*04.191/04.193</b></p>
	<p><b>...with electric strike release at side</b></p> <p>(Standard: fail secure function, 6 to 12 V -/-) and floor locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin. The use of latch lock or electric strike release result from a single-action door situation.</p> <p>Weight in kg/m: Aluminum 5.586 Stainless steel 6.640</p>	<p><b>*04.196/04.198</b></p>


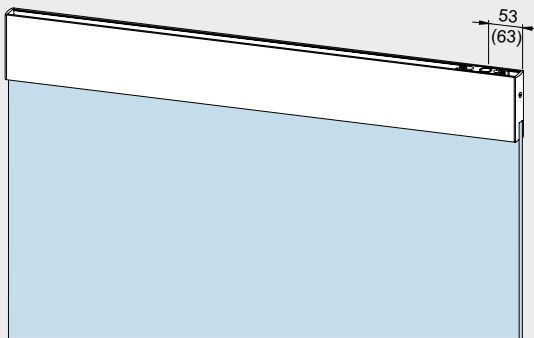
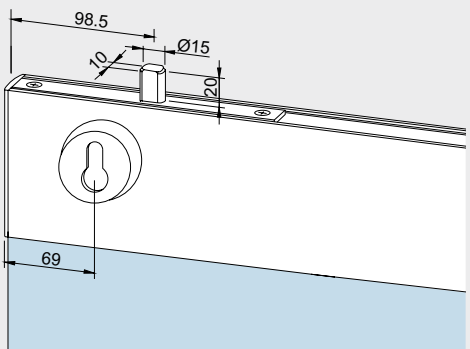
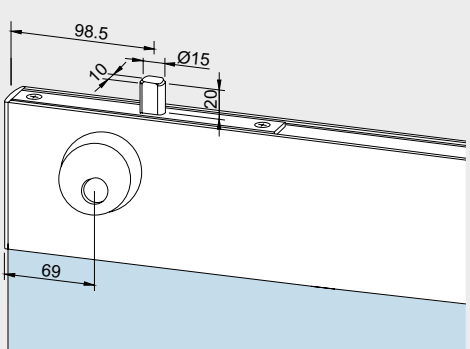
\* Order of Art.No.: Left hand / right hand – determined by view from hanging side.(Illustration shows right hand)

	Product description	Art. No.
	<p><b>Top rail</b> with insert to take 15 mm Ø pivot pin</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 4.979 Stainless steel 5.918</p> <p>76.5 mm:</p> <p>Weight in kg/m: Aluminum 3.877 Stainless steel 4.681</p>	<p><b>04.102</b></p> <p><b>04.002</b></p>
	<p>...and top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.466 Stainless steel 6.368</p> <p>76.5 mm:</p> <p>Weight in kg/m: Aluminum 4.212 Stainless steel 5.131</p>	<p><b>04.112</b></p> <p><b>04.012</b></p>
	<p>...with top locking lock prepared for KABA, single throw with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.314 Stainless steel 6.368</p> <p>76.5 mm:</p> <p>Weight in kg/m: Aluminum 4.212 Stainless steel 5.131</p>	<p><b>04.163</b> (not illustr.)</p> <p><b>04.063</b> (not illustr.)</p>

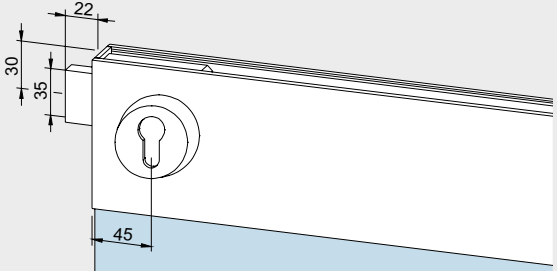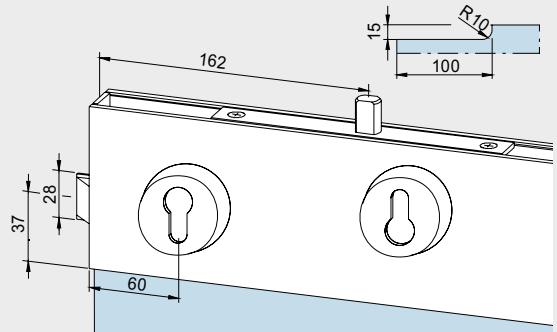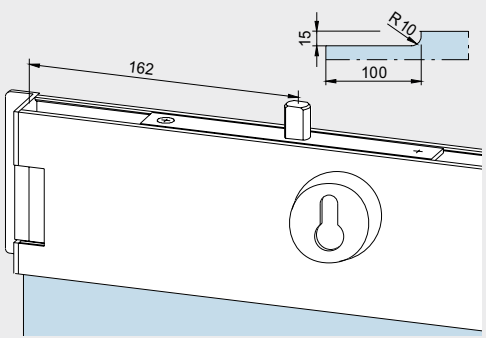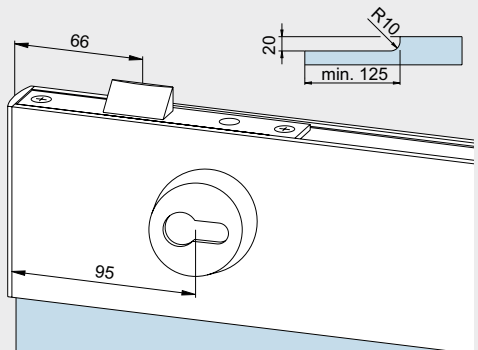	Product description	Art. No.
	<p><b>Top rail</b> with side locking lock, prepared for Europrofile cylinder, double throw</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.212 Stainless steel 6.266</p>	<p><b>04.122</b></p>
	<p>...with latch lock at side for electric strike release and top locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin. The use of latch lock or electric strike release results in a single-action door situation.</p> <p>Weight in kg/m: Aluminum 6.592 Stainless steel 8.148</p>	<p><b>*04.192/04.194</b></p>
	<p>...with electric strike release at side (Standard: fail secure function, 6 to 12 V -/-) and top locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin. The use of latch lock or electric strike release results in a single-action door situation.</p> <p>Weight in kg/m: Aluminum 6.492 Stainless steel 8.048</p>	<p><b>**04.197/04.199</b></p>
	<p>...with latch lock, locking to ceiling, prepared for Europrofile cylinder, single throw (necessary stop on site). The use of latch lock or electric strike release (on site) results in a single-action door situation.</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.294 Stainless steel 6.348</p>	<p><b>04.118</b></p>

\* Left / right hand (illustration shows left hand) are determined by view from hanging side.

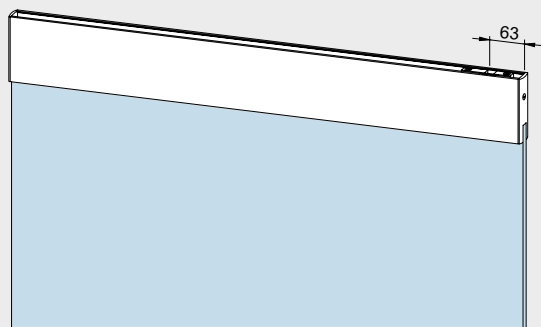
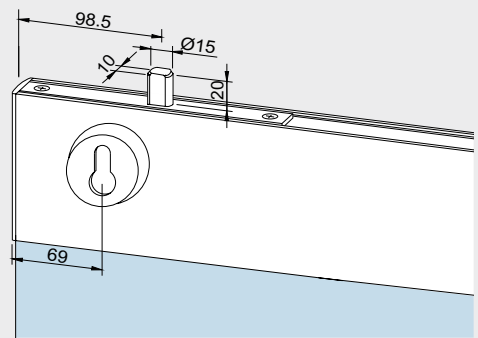
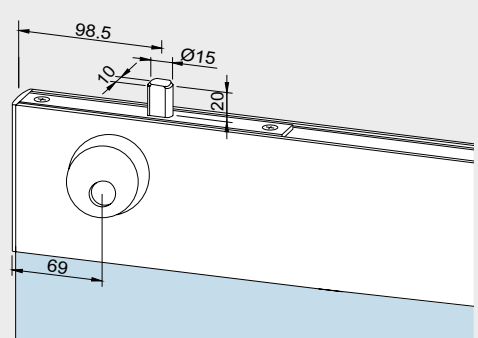
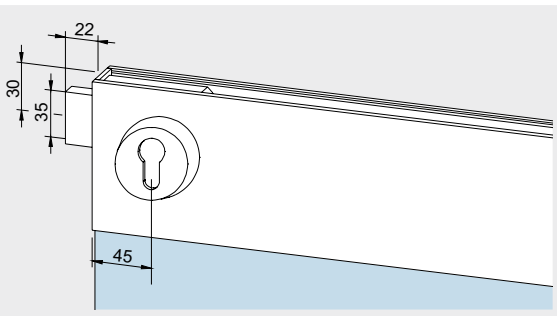
\*\* Left / right hand (illustration shows right hand) are determined by view from hanging side.





	Product description	Glass thickness	Art. No.
	<p><b>Top rail</b> with insert for DORMA RTS transom closer</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.145 Stainless steel 6.207</p> <p>76.5 mm:</p> <p>Weight in kg/m: Aluminum 4.043 Stainless steel 4.847</p>		<p><b>04.106</b></p> <p><b>04.006</b></p>
	<p>...and top locking lock, prepared for Euro-profile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.480 Stainless steel 6.657</p> <p>76.5 mm:</p> <p>Weight in kg/m: Aluminum 4.378 Stainless steel 5.297</p>		<p><b>04.116</b></p> <p><b>04.016</b></p>
	<p>...with top locking lock prepared for KABA, single throw with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.480 Stainless steel 6.655</p> <p>76.5 mm:</p> <p>Weight in kg/m: Aluminum 5.145 Stainless steel 6.207</p>		<p><b>04.167</b></p> <p><b>04.067</b></p>
	<p>...and side locking lock, prepared for Euro-profile cylinder, double throw</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.378 Stainless steel 6.555</p> <p>Not illustrated: <b>Gasket</b> (1 m = 1 pc.)</p>	<p>8 mm 12 mm</p>	<p><b>04.126</b></p> <p><b>01.900</b> <b>01.901</b></p>

# Door rails for double-action doors

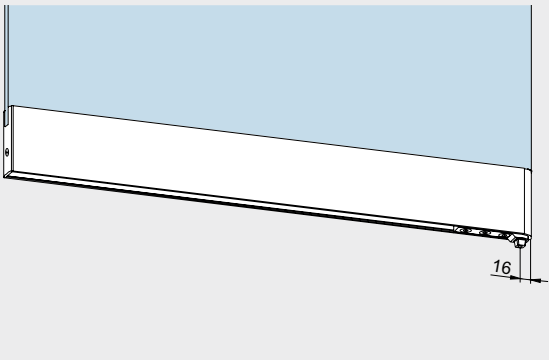
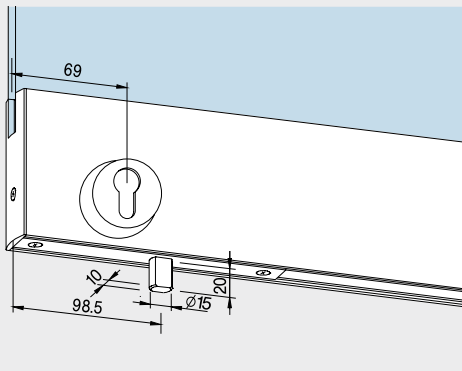
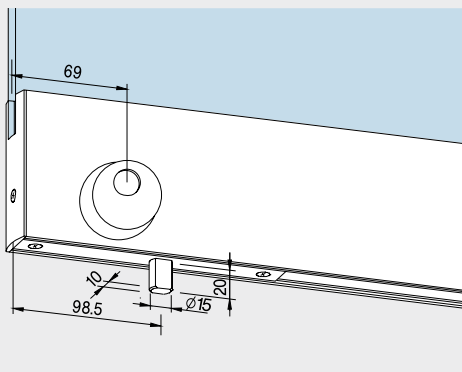
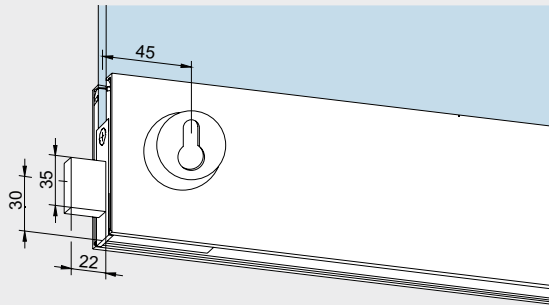
## Pivot point 18 mm

Complete, for 10 mm glass thickness

	Product description	Art. No.
	<p><b>Bottom rail</b> with DORMA floor spring spindle insert</p> <p>100 mm: <span style="float: right;"><b>04.103</b></span></p> <p>Weight in kg/m: Aluminum 5.218 Stainless steel 6.193</p> <p>76.5 mm: <span style="float: right;"><b>04.003</b></span></p> <p>Weight in kg/m: Aluminum 4.126 Stainless steel 4.824</p>	
	<p>...with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm: <span style="float: right;"><b>04.113</b></span></p> <p>Weight in kg/m: Aluminum 5.553 Stainless steel 6.643</p> <p>76.5 mm: <span style="float: right;"><b>04.013</b></span></p> <p>Weight in kg/m: Aluminum 4.461 Stainless steel 5.274</p>	
	<p>...with floor locking lock prepared for KABA, single throw (not illustrated) with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm: <span style="float: right;"><b>04.165</b></span></p> <p>Weight in kg/m: Aluminum 5.553 Stainless steel 6.664</p> <p>76.5 mm: <span style="float: right;"><b>04.065</b></span></p> <p>Weight in kg/m: Aluminum 5.228 Stainless steel 6.280</p>	
	<p>...with side locking lock, prepared for Europrofile cylinder, double throw</p> <p>100 mm: <span style="float: right;"><b>04.123</b></span></p> <p>Weight in kg/m: Aluminum 5.451 Stainless steel 6.541</p>	

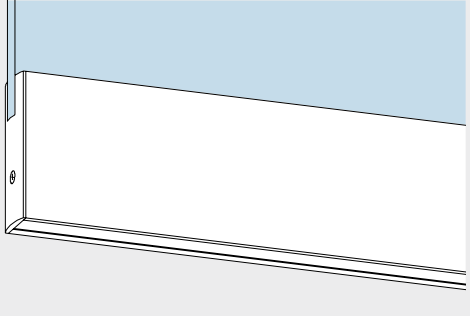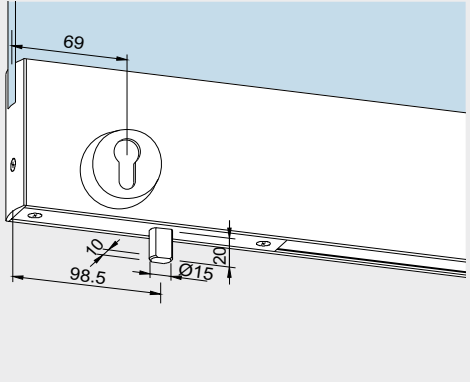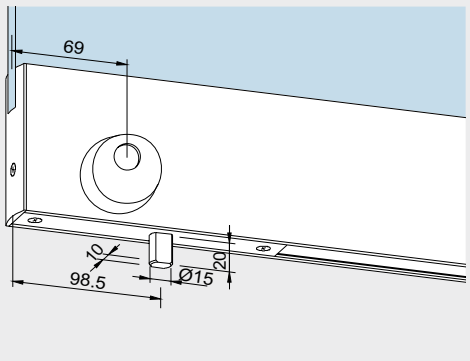
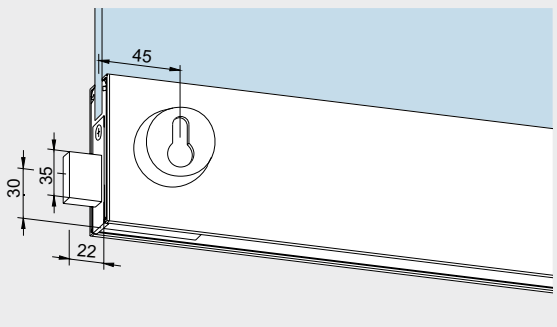
	Product description	Art. No.
	<p>...prepared for floor bearing</p> <p>100 mm:</p> <p>Weight in kg/m:</p> <p>Aluminum 4.938</p> <p>Stainless steel 5.975</p> <p>76.5 mm:</p> <p>Weight in kg/m:</p> <p>Aluminum 3.898</p> <p>Stainless steel 4.606</p>	<p><b>04.107</b></p> <p><b>04.007</b></p>
	<p><b>Bottom rail</b> with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin, <b>prepared for floor bearing</b></p> <p>100 mm:</p> <p>Weight in kg/m:</p> <p>Aluminum 5.334</p> <p>Stainless steel 6.425</p> <p>76.5 mm:</p> <p>Weight in kg/m:</p> <p>Aluminum 4.243</p> <p>Stainless steel 5.056</p>	<p><b>04.117</b></p> <p><b>04.017</b></p>
	<p>...with floor locking lock prepared for KABA, single throw with corrosion resistant bolt and hardened safety roll pin, <b>prepared for floor bearing</b></p> <p>100 mm:</p> <p>Weight in kg/m:</p> <p>Aluminum 5.334</p> <p>Stainless steel 6.425</p> <p>76.5 mm:</p> <p>Weight in kg/m:</p> <p>Aluminum 4.243</p> <p>Stainless steel 5.056</p>	<p><b>04.168</b></p> <p><b>04.068</b></p>
	<p>...with side locking lock, prepared for Europrofile cylinder, double throw, <b>prepared for floor bearing</b></p> <p>100 mm:</p> <p>Weight in kg/m:</p> <p>Aluminum 5.233</p> <p>Stainless steel 6.323</p>	<p><b>04.127</b></p>

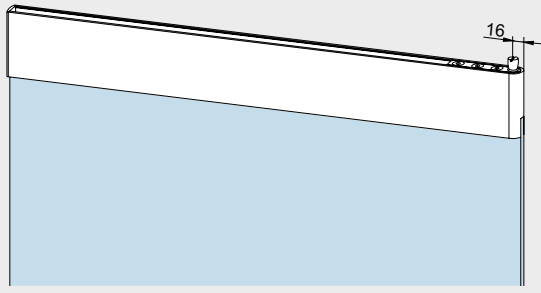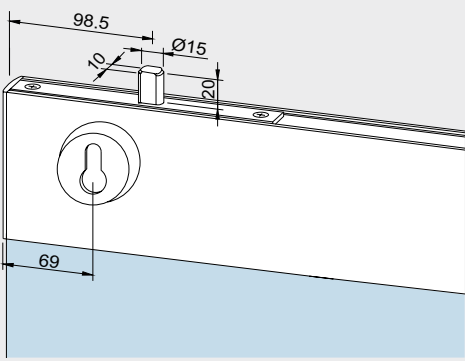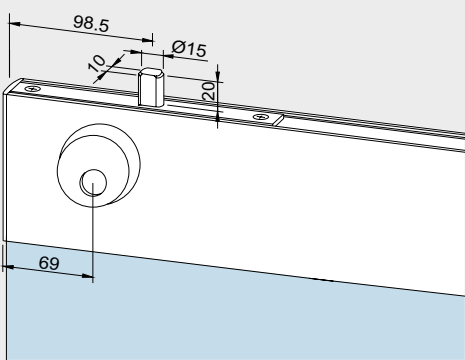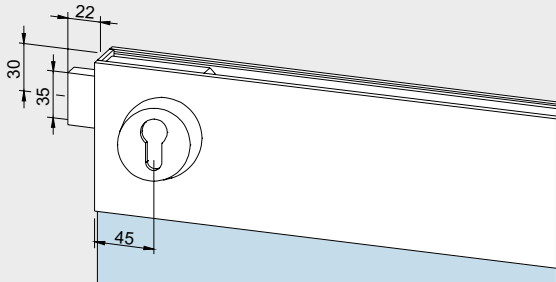

	Product description	Art. No.
	<p><b>Top rail</b> with 15 mm Ø pivot pin</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.000 Stainless steel 5.975</p> <p>76.5 mm:</p> <p>Weight in kg/m: Aluminum 3.908 Stainless steel 4.606</p>	<p><b>04.104</b></p> <p><b>04.004</b></p>
	<p>...and top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.335 Stainless steel 6.425</p> <p>76.5 mm:</p> <p>Weight in kg/m: Aluminum 4.243 Stainless steel 5.056</p>	<p><b>04.114</b></p> <p><b>04.014</b></p>
	<p>...with top locking lock prepared for KABA, single throw with corrosion resistant bolt and hardened safety roll pin</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.335 Stainless steel 6.425</p> <p>76.5 mm:</p> <p>Weight in kg/m: Aluminum 4.243 Stainless steel 5.056</p>	<p><b>04.166</b></p> <p><b>04.066</b></p>
	<p>...with side locking lock, prepared for Europrofile cylinder, double throw</p> <p>100 mm:</p> <p>Weight in kg/m: Aluminum 5.233 Stainless steel 6.323</p>	<p><b>04.124</b></p>





# Radiused edging strip

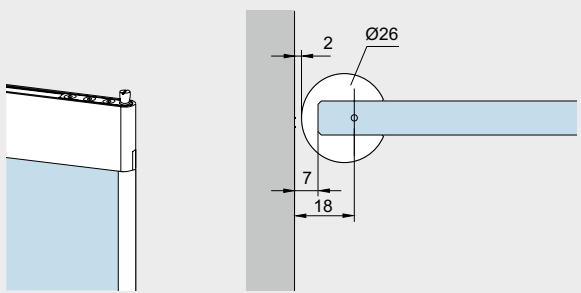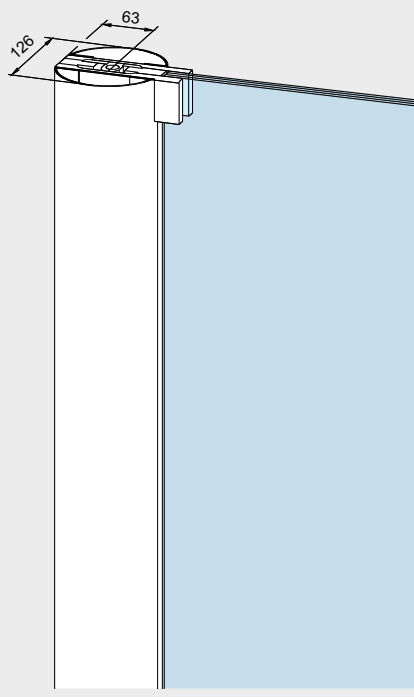Acryl, transparent, to clamp onto free glass edge. For optimal pinch protection. For application with door rails with 18 mm pivot point.



	Product description	Glass thickness	Art. No.
	<p><b>Radiused edging strip</b> Please indicate door height and type of fitting with order.</p> <p>up to 4,500 mm length fixed length: 2,250 mm</p> <p><b>Notice:</b> When radiused edging strip is used the following glass measurement is valid = door rail width – 5 mm. TSG only.</p>	<p>10 mm 10 mm</p>	<p><b>01.231</b> <b>01.230</b></p>
	<p><b>Aluminum round profile</b> for pinch free doors with 65 mm pivot point, consisting of 2 halves, prepared for UNIVERSAL fittings or door rails (76.5 mm or 100 mm).</p> <p>Please indicate:</p> <ul style="list-style-type: none"> <li>• Panel height (max. 2,500 mm, higher dimension on request)</li> <li>• Required preparation of the profile for top and bottom fittings</li> </ul> <p><b>Aluminum round profile,</b> as above, stock length 6,000 mm (unprepared)</p> <p><b>Aluminum round profile,</b> as above, stock length 3,000 mm (unprepared)</p> <p><b>Aluminum round profile,</b> as above, stock length 2,800 mm (unprepared)</p> <p>Weight in kg/m: Aluminum 4.744</p>		<p><b>03.380</b></p> <p><b>03.381</b></p> <p><b>03.382</b></p> <p><b>03.383</b></p>

# Rails for side panel

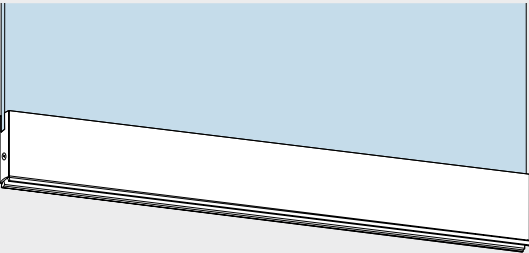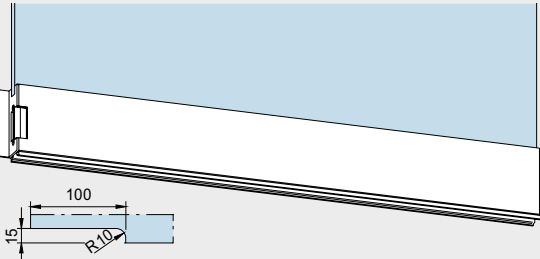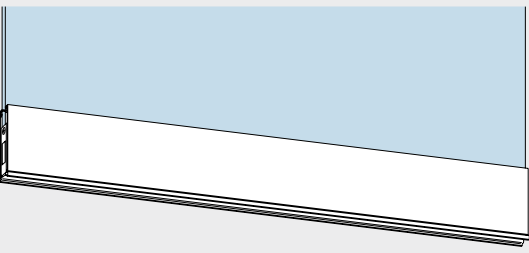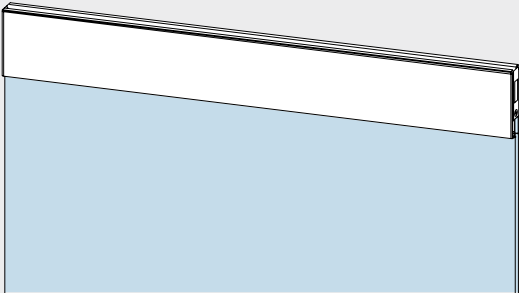complete, for 10 mm glass thickness

	Product description	Art. No.
	<p><b>Bottom rail for side panel,</b> up to approx. 6,000 mm long with rail filler insert 7 mm</p> <p>100 mm: <span style="float: right;"><b>04.301</b></span></p> <p>Weight in kg/m: Aluminum 5,604 Stainless steel 6,494</p> <p>76.5 mm: <span style="float: right;"><b>04.201</b></span></p> <p>Weight in kg/m: Aluminum 4,504 Stainless steel 5,273</p>	
	<p>...with electric strike release (standard: fail secure function, 6 to 12 V -/-), door width up to max. 1,200 mm (&gt; 1,200 mm on request)</p> <p>100 mm: <span style="float: right;"><b>*04.311/04.313</b></span></p> <p>Weight in kg/m: Aluminum 5,116 Stainless steel 6,055</p>	
	<p>...with strike-box for side bolt locking, door width up to max. 1,200 mm (&gt; 1,200 mm on request)</p> <p>100 mm: <span style="float: right;"><b>04.315</b></span></p> <p>Weight in kg/m: Aluminum 4,979 Stainless steel 5,918</p>	
	<p><b>Top rail for side panel,</b> up to approx. 6,000 mm long with rail filler insert 3 mm</p> <p>100 mm: <span style="float: right;"><b>04.302</b></span></p> <p>Weight in kg/m: Aluminum 5,441 Stainless steel 6,331</p> <p>76.5 mm: <span style="float: right;"><b>04.202</b></span></p> <p>Weight in kg/m: Aluminum 4,341 Stainless steel 5,110</p>	

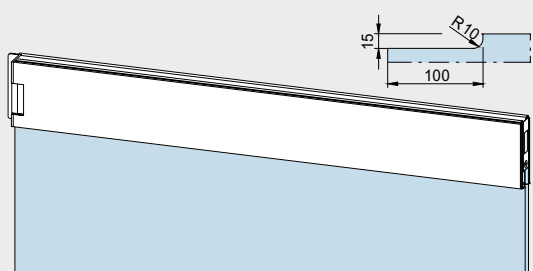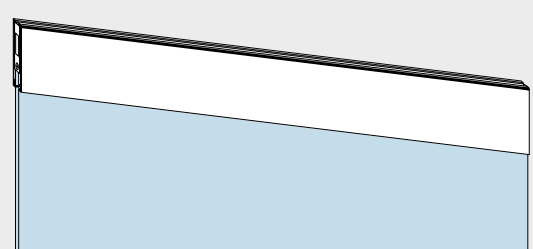\* Left / right hand (illustration shows right hand) are determined by view from hanging side.

	Product description	Art. No.
	<p>...with electric strike release (standard: fail secure function, 6 to 12 V -/-)</p> <p>100 mm:</p> <p>Weight in kg/m:                      Aluminum      5.578                      Stainless steel   6.468</p>	<p><b>*04.312/04.314</b></p>
	<p>...with strike-box for side bolt locking</p> <p>100 mm:</p> <p>Weight in kg/m:                      Aluminum      5.441                      Stainless steel   6.331</p>	<p><b>04.316</b></p>

\* Left / right hand (illustration shows right hand) are determined by view from hanging side.

# Space for your notes



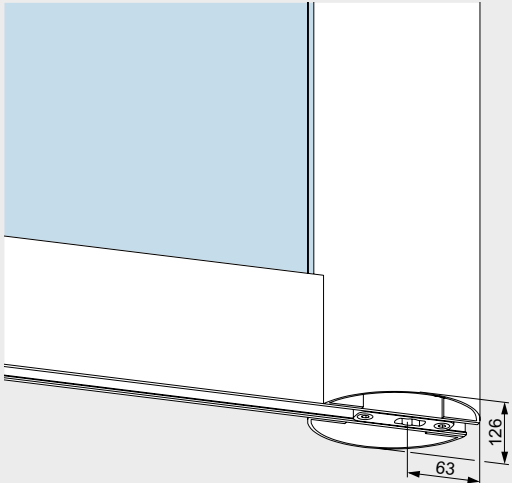
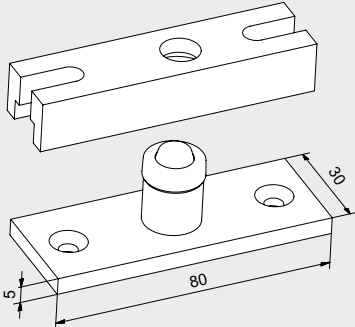
# Top centre frame portion

with patch fittings see EA





	Product description	Art. No.
	<p><b>Frame top centre</b> with fixing block</p> <p>Weight in kg/m: Aluminum 0.471</p>	<p><b>02.150</b></p>
	<p><b>Frame top centre</b> with angle bracket</p> <p>Weight in kg/m: Aluminum 0.453</p>	<p><b>02.151</b></p>
	<p><b>Frame top centre</b> with special wedge screw fixings</p> <p>Weight in kg/m: Aluminum 0.390</p> <p>Drill jig:</p>	<p><b>*02.152/02.153</b></p> <p><b>8.02.081.001.50</b></p>
	<p><b>Frame top centre</b> AT 212 GSR with fixing plate</p> <p>Weight in kg/m: Stainless steel 0.215</p>	<p><b>*02.340/02.341</b></p>

\* Left / right hand (illustration shows right hand) are determined by view from hanging side.





# Special accessories and special inserts for door rails

	Product description	Art. No.
	<p><b>Aluminum profile with brush seal</b> to prevent draughts and energy loss (not in the area of inserts, locks, etc.), connected with door rail at manufacturer</p> <p>Weight in kg/m: 0.753</p>	<p><b>04.600</b></p>
	<p><b>Rubber sealing</b> for door rails (also in the area of inserts, locks, etc.)</p> <p>fixed length stock length 200 m (= 1 coil)</p> <p>Weight in kg/m: 0.099</p>	<p><b>04.607</b> <b>04.608</b></p>
	<p><b>Aluminum round profile</b> for pinch free doors with 65 mm pivot point, consisting of 2 halves, prepared for UNIVERSAL fittings* or door rails (76.5 mm or 100 mm). Please indicate:</p> <ul style="list-style-type: none"> <li>• Panel height (max. 3,000 mm, higher dim. on request)</li> <li>• Required preparation of the profile for top and bottom fittings</li> </ul> <p>fixed length</p> <p>Weight in kg/m: Aluminum 4.744</p> <p>stock length 6,000 mm (not prepared) stock length 3,000 mm (not prepared)</p>	<p><b>03.380</b></p> <p><b>03.381</b> <b>03.382</b></p>
	<p><b>Screw-on floor bearing for damp environment,</b> without floor recess, with inserts for door rails, max. 80 kg</p> <p>Weight in kg/m: 0.193</p>	<p><b>01.136</b></p>

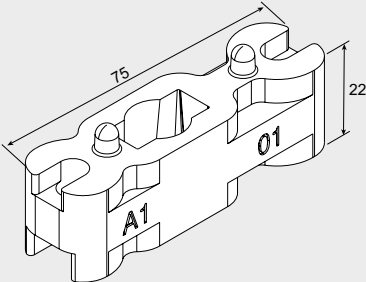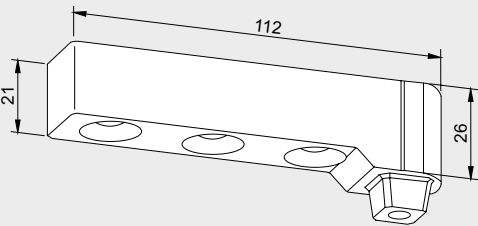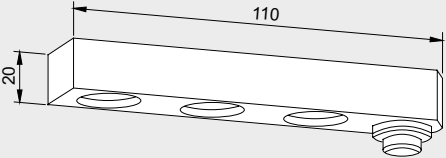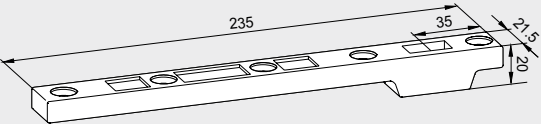\*Information as to the product UNIVERSAL you may find in the technical brochure "Patch fittings for toughened glass assemblies"

	Product description	Art. No.
	<p><b>Bottom insert</b> for DORMA floor spring spindle profile or round pivot 14 mm Ø, (DORMA floor spring BTS or floor bearing Art. No. 01.106 and 01.107), stainless steel, 55/65 mm pivot point, max. door weight 80 kg</p> <p>Weight in kg/m: 0.243</p>	<p><b>04.604</b></p>
	<p><b>Bottom strap,</b> steel, zinc plated, with spindle insert to suit DORMA floor springs, 18 mm pivot point, max. door weight 80 kg</p> <p>Weight in kg/m: 0.349</p>	<p><b>804.167.001.55</b></p>
	<p><b>Bottom strap,</b> aluminum, to suit floor bearings 01.106 and 01.107, 18 mm pivot point, max. door weight 80 kg</p> <p>Weight in kg/m: 0.129</p>	<p><b>804.060.002.50</b></p>
	<p><b>Bottom strap</b> in forged steel special edition, mounted in door rails, to suit DORMA floor spring spindles. (Also suitable for floor bearing 04.602, 04.603. Not suitable for floor bearing with round pivot.) For centre hung doors</p> <ul style="list-style-type: none"> <li>• normal frequented doors, max. door weight 150 kg, max. door width 1,400 mm</li> <li>• high frequented doors, max. door weight 120 kg, max. door width 1,200 mm</li> </ul> <p>Pivot point either 55 or 65 mm (please specify with order).</p> <p>Weight in kg/m: 0.385</p>	<p><b>04.605</b></p>

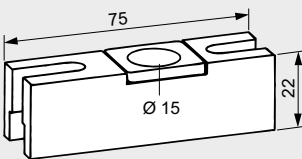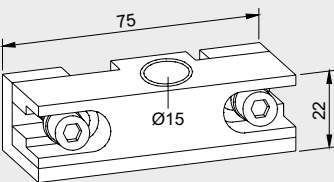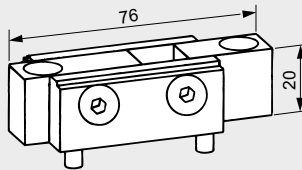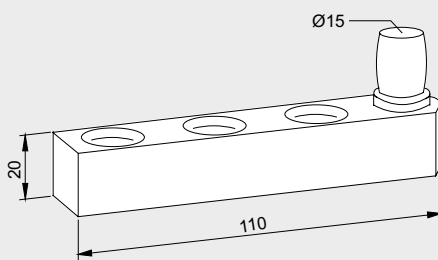

	Product description	Art. No.
	<p><b>Top insert</b> 55/65 mm pivot point, Aluminum</p> <p>Weight in kg/m: 0.091</p>	<p><b>04.610</b></p>
	<p><b>Top insert, two part,</b> Aluminum, special, 55/65 mm pivot point not in standard door rail</p> <p>Weight in kg/m: 0.088</p>	<p><b>04.606</b></p>
	<p><b>Top insert</b> for DORMA RTS transom closer, zinc plated steel, 65 mm pivot point</p> <p>Weight in kg/m: 0.240</p>	<p><b>04.611</b></p>
	<p><b>Top strap</b> Aluminum, 18 mm pivot point</p> <p>Weight in kg/m: 0.131</p>	<p><b>804.060.001.50</b></p>

# Content

## MANET Compact

156	<b>General information</b>
177	<b>Type illustrations</b>
224	<b>Accessories</b>
248	<b>Safety-related information</b>

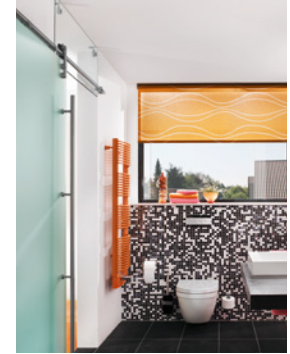


**MANET**  
**Compact**

# MANET Compact sets

The aesthetic elegance of the MANET Compact concept is also available in the form of standardized sets for simple, fast planning of the more popular system types.


Optional accessories enable the individual sets to be semi-customized. The system components offer numerous adjustment possibilities in order to ensure problem-free installation of whichever door type – swing or single-action or double-action – is required. Wall abutment profiles may need to be provided (by others) for fixing overpanels and sidelights.




Pivoting fitting short type,  
 max. door panel height 2,500 mm  
 max. door panel width 1,200 mm  
 max. door panel weight 80 kg

Pivoting fitting short type with intermediate tube,  
 max. door panel height 2,500 mm  
 max. door panel width 1,200 mm  
 max. door panel weight 80 kg


Countersunk bore for countersunk single-point fixings




Cylindrical bore for clamping disc single-point fixings




### Pivoting doors set 1




Construction 1 (1 set)




Construction 2 (1 set)




Construction 3 (1 set)




Construction 4 (1 set)




Construction 5 (2 sets)



Construction 6 (2 sets)




Construction 7 (2 sets)




Construction 8 (2 sets)


### Pivoting doors with overpanel set 2



Construction 9 (1 set)




Construction 12 (1 set)




Construction 18 (2 sets)


### Pivoting doors with overpanel and sidelight set 3



Construction 13 (1 set)




Construction 15 (1 set)



Construction 23 (2 sets)


### Drehtüren set 2 + 3



Construction 21 (1 set each)

# Set 1
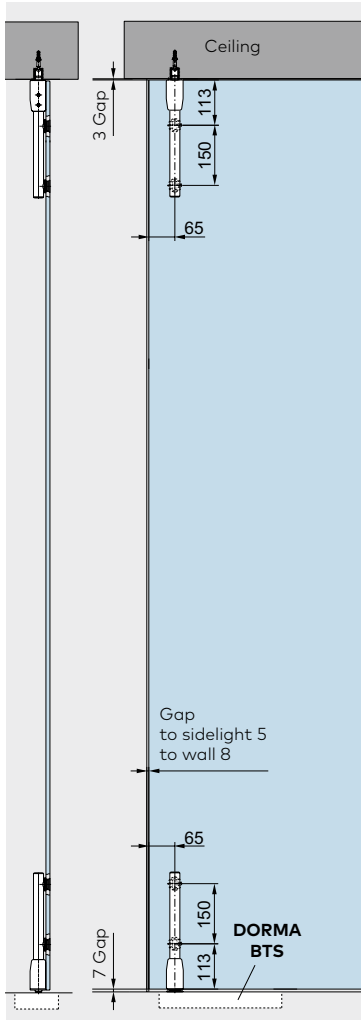
## Pivoting door MANET Compact without overpanel for 10 – 12 mm glass



Door weight 80 kg  
 Door height max. 2,500 mm  
 Door width max. 1,200 mm  
 TSG 10/12 mm glass thickness

Product description	Art. No.
<b>Set 1</b> with pivot rod pair short type	
<b>Set 1 with single-point fixings countersunk</b> consisting of: pivot rod pair top/bottom, short type	<b>29.910</b>
including: 4 single-point fixings for pivot rods 1 pivot fitting top, 1 PT 25 pin, 15 mm Ø, with plug 1 pivot fitting bottom for DORMA BTS/floor pivot	
<b>Option:</b> <b>Set 1,</b> but for additional intermediate tube in fixed length for pivot rod pair	<b>29.911</b>
Intermediate tube in fixed length	<b>29.555</b>
<b>Please indicate:</b>  Panel height _____ mm - 577 mm = length intermediate tube  _____ mm	


### Accessory options for Set 1

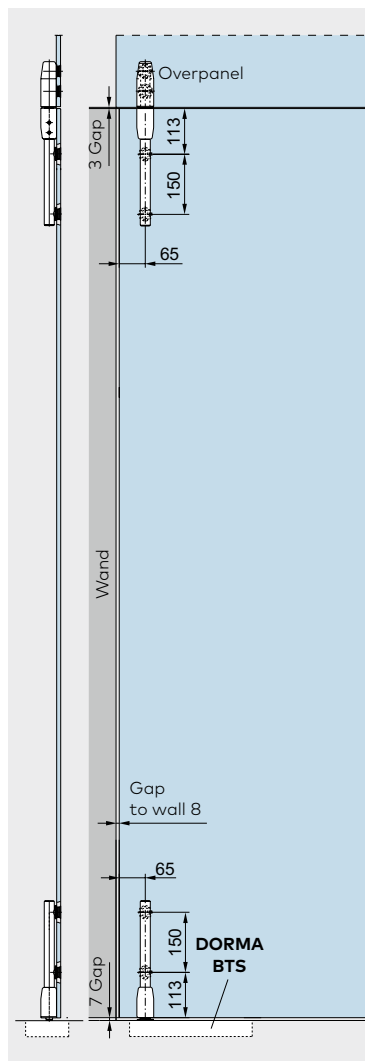Pull handles	Length	Art. No.
Pull handles (single-point fixing countersunk)	350	<b>29.268</b>
	720	<b>29.271</b>
	1,240	<b>29.274</b>
	1,760	<b>29.277</b>
	Pair of pull handles	350
	720	<b>21.270</b>
	1,240	<b>21.273</b>
	1,760	<b>21.276</b>
<b>Lock</b>		
Corner lock		<b>21.448</b>
Corner lock with rose on one lock side		<b>21.449</b>
Profile cylinder for corner lock 21.448/449		<b>14.206</b>
Eccentric bushing for corner lock 21.448/449		<b>05.194</b>
<b>Further accessories</b>		
Stop for pivoting door with ceiling mounting		<b>21.334</b>
Ceiling fixing (bearing function)		<b>29.337</b>
Floor pivot bearing		<b>01.106</b>
Assembling tool for MANET single-point fixings		<b>21.134</b>

For the requisite glass preparation please see pages 172 – 173

# Set 2

## Pivoting door MANET Compact with overpanel for 10 – 12 mm glass



Door weight 80 kg  
 Door height max. 2,500 mm  
 Door width max. 1,200 mm  
 TSG 10/12 mm glass thickness

Product description	Art. No.
<b>Set 2</b> with pivot rod pair short type  <b>Set 2 with single-point fixings countersunk</b> consisting of: pivot rod pair top/bottom, short type  including: 4 single-point fixings for pivot rods, 1 pivot fitting top, 1 pivot bearing location for overpanel, 1 pivot fitting bottom for DORMA BTS/floor pivot	<b>29.912</b>
<b>Option:</b> <b>Set 2,</b> but with additional intermediate tube in fixed length for pivot rod pair Intermediate tube in fixed length	<b>29.913</b> <b>29.555</b>
<b>Please indicate:</b>  Panel height _____ mm – 577 mm = length intermediate tube  _____ mm	


### Accessory options for Set 2

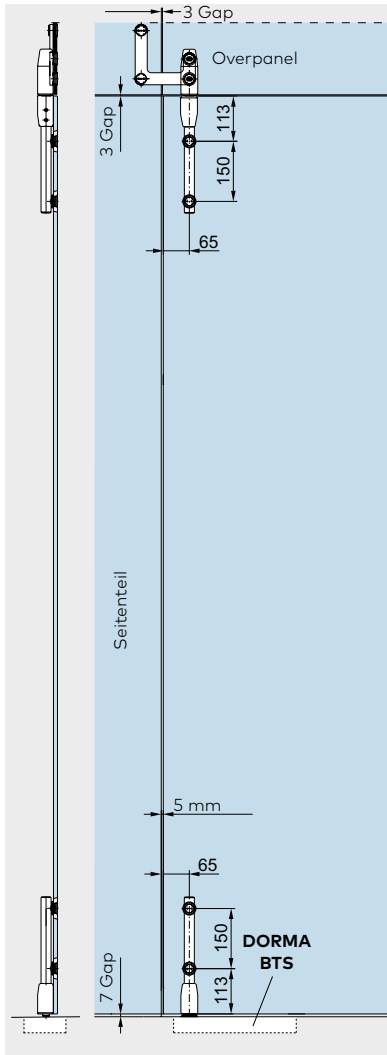	Length	Art. No.
<b>Pull handles</b>		
Pull handles (single-point fixing countersunk)	350	<b>29.268</b>
	720	<b>29.271</b>
	1,240	<b>29.274</b>
	1,760	<b>29.277</b>
Pair of pull handles	350	<b>21.267</b>
	720	<b>21.270</b>
	1,240	<b>21.273</b>
	1,760	<b>21.276</b>
Ceiling fixing (bearing function)		<b>29.337</b>
Stop at overpanel, (inside/outside) for 10/12 mm glass		<b>29.335</b>
<b>Lock</b>		
Corner lock		<b>21.448</b>
Corner lock with rose on one lock side		<b>21.449</b>
Profile cylinder for corner lock 21.448/449		<b>14.206</b>
Eccentric bushing for corner lock 21.448/449		<b>05.194</b>
<b>Further accessories</b>		
Overpanel-sidelight connector for 10/12 mm glass		<b>29.320</b>
Overpanel-sidelight connector with stop inside for 10/12 mm glass		<b>29.322</b>
Overpanel-sidelight connector with stop outside for 10/12 mm glass		<b>29.325</b>
Floor pivot bearing		<b>01.106</b>
Assembling tool for MANET single-point fixings		<b>21.134</b>

For the requisite glass preparation please see pages 172 – 173

# Set 3

## Pivoting door MANET Compact with overpanel for 10 – 12 mm glass



Door weight 80 kg  
 Door height max. 2,500 mm  
 Door width max. 1,200 mm  
 TSG 10/12 mm glass thickness

	Product description	Art. No.
	<b>Set 3</b> with pivot rod pair short type	
	<b>Set 3 with single-point fixings countersunk</b> consisting of: pivot rod pair top/bottom, short type	<b>29.914</b>
	einschließlich: 4 single-point fixings for pivot rods, 1 pivot fitting top, 1 overpanel-sidelight connector with pivot bearing location, 1 pivot fitting bottom for DORMA BTS/floor pivot	
	<b>Option:</b> <b>Set 3,</b> but with additional intermediate tube in fixed length for pivot rod pair Intermediate tube in fixed length	<b>29.915</b> <b>29.555</b>
	<b>Please indicate:</b>	
	Panel height _____ mm – 577 mm = length intermediate tube _____ mm	

### Accessory options for Set 3

	Length	Art. No.
<b>Pull handles</b>		
Pull handles	350	<b>29.268</b>
(single-point fixing countersunk)	720	<b>29.271</b>
	1,240	<b>29.274</b>
	1,760	<b>29.277</b>
Pair of pull handles	350	<b>21.267</b>
	720	<b>21.270</b>
	1,240	<b>21.273</b>
	1,760	<b>21.276</b>
Ceiling fixing (bearing function)		<b>29.337</b>
Stop at overpanel, (inside/outside) for 10/12 mm glass		<b>29.335</b>
<b>Lock</b>		
Corner lock		<b>21.448</b>
Corner lock with rose on one lock side		<b>21.449</b>
Profile cylinder for corner lock 21.448/449		<b>14.206</b>
Eccentric bushing for corner lock 21.448/449		<b>05.194</b>
<b>Further accessories</b>		
Overpanel-sidelight connector for 10/12 mm glass		<b>29.320</b>
Overpanel-sidelight connector with stop inside for 10/12 mm glass		<b>29.322</b>
Overpanel-sidelight connector with stop outside for 10/12 mm glass		<b>29.325</b>
Floor pivot bearing		<b>01.106</b>
Assembling tool for MANET single-point fixings		<b>21.134</b>

For the requisite glass preparation please see pages 172 – 173

# Content

## MANET Concept

162	<b>General information</b>
163	<b>Components</b>
172	<b>Glass preparation</b>
224	<b>Accessories</b>
248	<b>Safety-related information</b>

All elements up to and including the pull handles are available in an elegant stainless steel finish. All the components are manufactured from the steel grade 1.4305 (approx. AISI 303) for normal interior applications.

For damp room or external applications (but not for saunas or swimming pools), especially selected fittings manufactured in the stainless steel grade 1.4404 (approx. AISI 316) are also available.

The material selection necessary for your application can be determined with the aid of German general building regulations approval Z-30.3-6, Tables 1 according to DIN EN 1993-1-4, annexe A or other national equivalents.

**Note:** The products detailed in this brochure are exclusively intended for glass assemblies that do not require separate building regulations approval.






# MANET Concept

# Pivoting door system


MANET pivoting doors can be installed in both glass partitions and masonry openings. They come as both single and double-action swing doors. All the single-point fixings are designed for clip-on covers for easier installation. Other components include the bottom pivot bearing, top pivot fittings with bearing spigot or eccentric bushing and also overpanel/ sidelight connectors.

As a result, there are almost unlimited possibilities for inte-grating frameless swing doors both in masonry openings – with or without overpanels and sidelights – and in glass partition constructions retained by single-point fixings. Whether with a full-length pivot rod or a pair of shorter pivot rods, the top bearing socket is located in the fitting on the door leaf. This means that connection to the ceiling, lintel or transom can now be provided in the form of the standard PT25 top pivot spigot from the dormakaba range. The door assemblies can be equipped with floor springs such as the DORMA BTS 75V or BTS 84, and corner locks are naturally also available.




Pivot bearing with full-length pivot rod,  
max. door panel height 3,000 mm  
max. door panel width 1,200 mm  
max. door panel weight 100 kg


From a door panel height of 2,700 mm a fifth single-point fixing is recommended.






Pivot bearing with pivot rod pair short type,  
max. door panel height 2,500 mm  
max. door panel width 1,200 mm  
max. door panel weight 80 kg



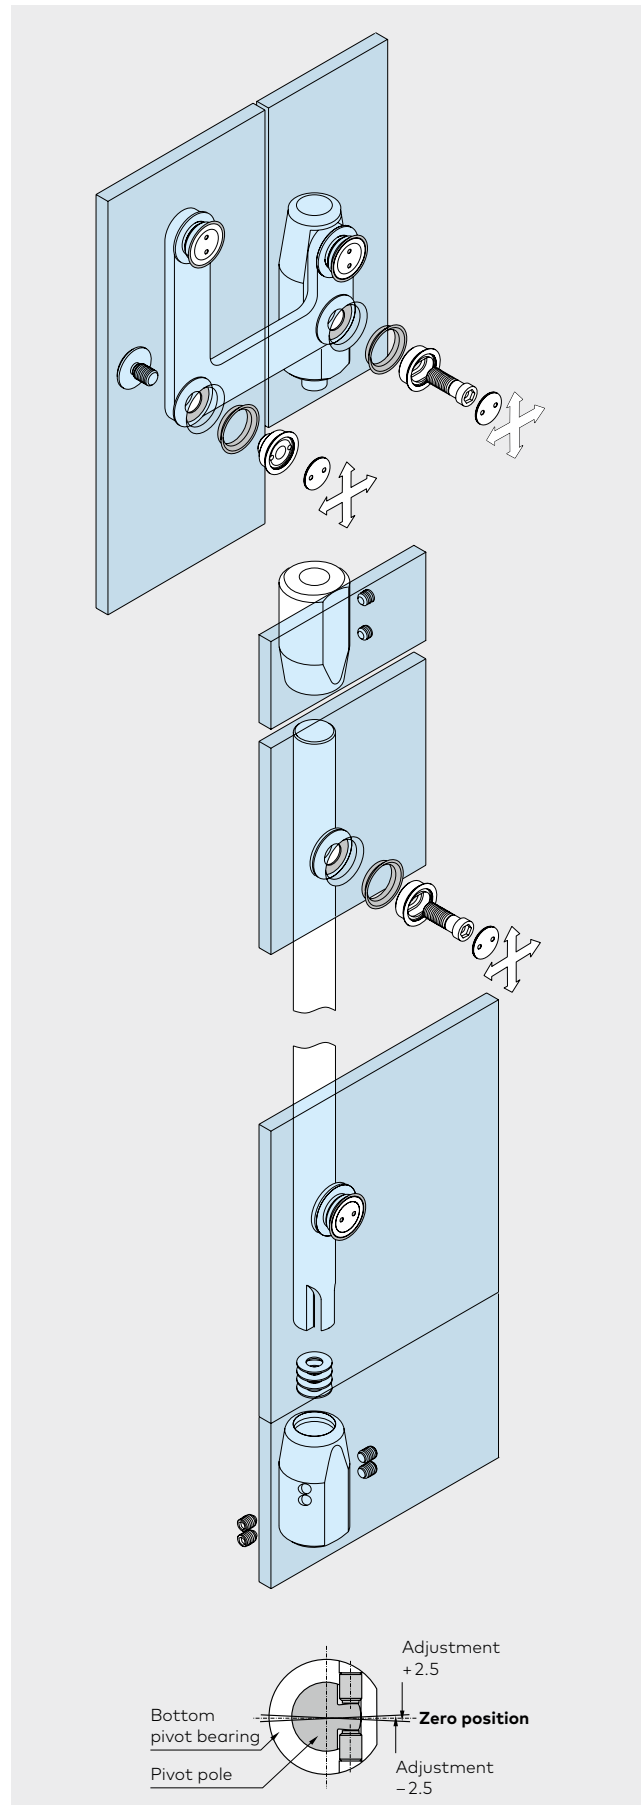Pivot bearing with pivot rod pair short type with intermediate tube,  
max. door panel height 2,500 mm  
max. door panel width 1,200 mm  
max. door panel weight 80 kg






# Components for pivoting door system

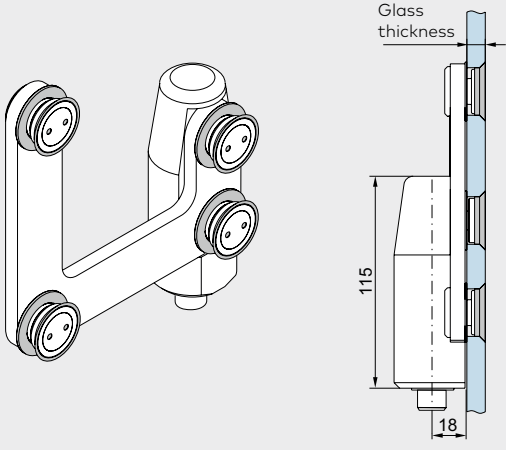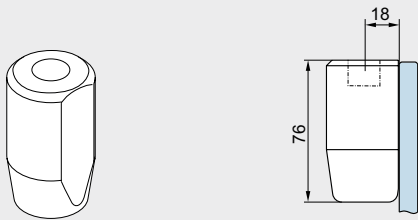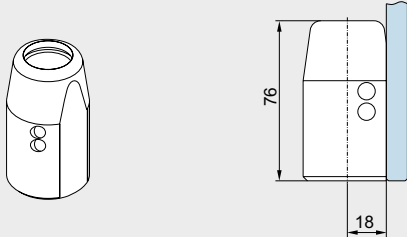	Product description	Glass thickness	Art. No.
	<p><b>Overpanel / sidelight connector complete fitting countersunk</b></p> <p>AISI 316L</p> <p>clamping disc</p>	<p>10, 12 mm</p>	<p><b>29.330</b></p> <p><b>29.362</b></p> <p><b>29.356</b></p>
	<p><b>Pivot bearing for overpanel and ceiling connection</b></p> <p>AISI 316L</p>		<p><b>21.310</b></p> <p><b>21.350</b></p>
	<p><b>Pivot bearing for DORMA BTS (max. 4 EN) / floor pivot</b></p> <p>AISI 316L</p>		<p><b>29.545</b></p> <p><b>29.550</b></p>





# Components for pivoting door system

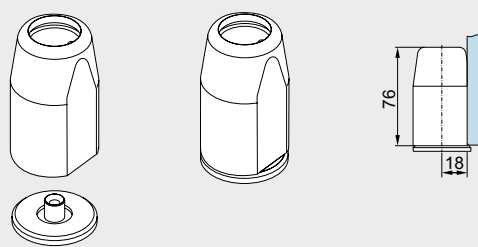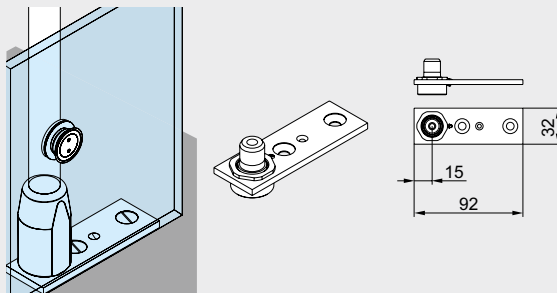	Product description	Glass thickness	Art. No.
	<b>Pivot rod,</b> drilled, fixed length		<b>29.551</b>
	<b>Single-point fixing,</b> <b>countersunk, fixed (1)</b>	10, 12 mm	<b>29.460</b>
	AISI 316L		<b>29.461</b>
		13.5–15.5 mm	<b>29.450</b>
	<b>clamping disc, fixed (1)</b>	10, 12 mm	<b>29.465</b>
	AISI 316L		<b>29.466</b>
	<b>Single-point fixing,</b> <b>countersunk, centering (2)</b>	10, 12 mm	<b>29.462</b>
AISI 316L		<b>29.463</b>	
	13.5–15.5 mm	<b>29.455</b>	
<b>clamping disc, centering (2)</b>	10, 12 mm	<b>29.467</b>	
<p>From a door panel height of 2,700 mm a fifth single-point fixing is recommended.</p>			
	<b>Pivot rod set, short type top/bottom,</b> incl. 4 single-point fixings		
	<b>countersunk</b>		<b>29.546</b>
	AISI 316L		<b>29.547</b>
	<b>clamping disc</b>		<b>29.560</b>
	AISI 316L		<b>29.561</b>







	Product description	Art. No.
	<p><b>Pivot rod set, short type top / bottom,</b> for intermediate tube, inclusive 4 single-point fixings</p> <p><b>countersunk</b></p> <p>AISI 316L</p> <p><b>clamping disc</b></p> <p>AISI 316L</p> <p><b>Intermediate tube</b> fixed length up to 2,000 mm</p> <p>AISI 316L</p>	<p><b>29.548</b></p> <p><b>29.549</b></p> <p><b>29.562</b></p> <p><b>29.563</b></p> <p><b>29.555</b></p> <p><b>29.557</b></p>
	<p><b>Pivot bearing for humid rooms</b> max. panel weight 60 kg</p> <p>AISI 316L</p>	<p><b>29.540</b></p>
	<p><b>Floor pivot</b></p>	<p><b>01.106</b></p>

# Components for pivoting door system
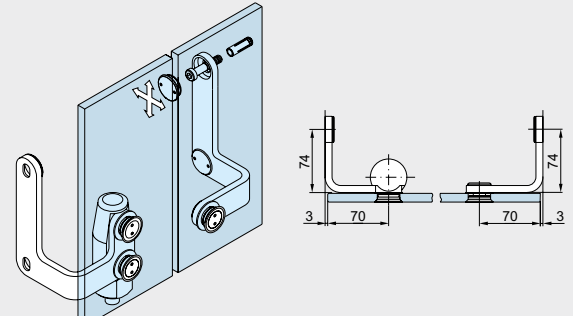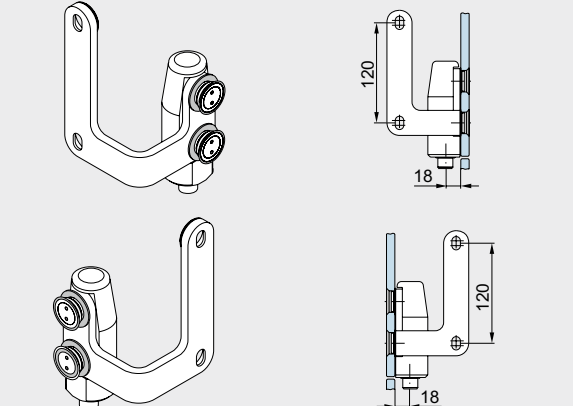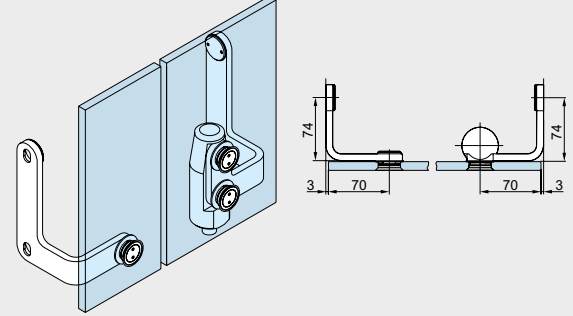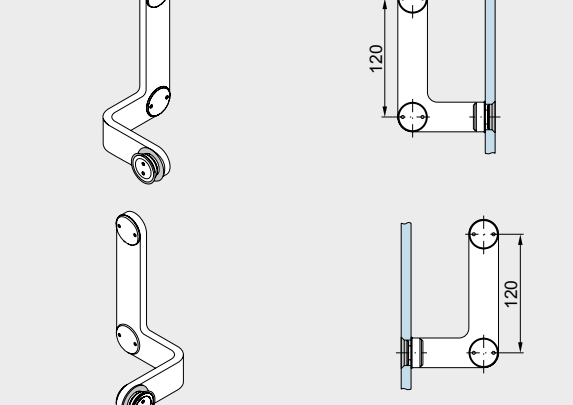
## Wall fixing

	Product description	Glass thickness	Art. No.
	<p><b>Overpanel / sidelight connector for wall fixing</b> 90° offset, with pivot bearing location, complete fitting</p> <p><b>right hand</b></p>	10, 12 mm	<b>29.328</b>
	<p><b>left hand</b></p>	10, 12 mm	<b>29.329</b>
	<p><b>Overpanel / sidelight connector for wall fixing</b> 90° offset, complete fitting</p> <p><b>right hand</b></p>	10, 12 mm	<b>29.326</b>
	<p><b>left hand</b></p>	10, 12 mm	<b>29.327</b>

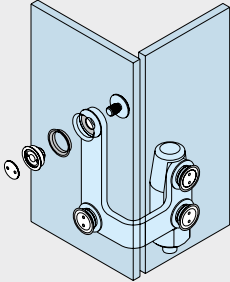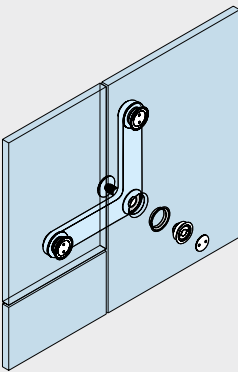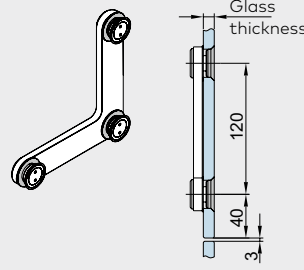Glass fixing

		Product description	Glass thickness	Art. No.
		<p><b>Overpanel / sidelight connector for glass fixing</b> 90° offset, with pivot bearing location, complete fitting</p>		
		<p><b>Overpanel / sidelight connector for glass fixing</b> 90° offset, with pivot bearing location, complete fitting</p>		
		<p><b>Overpanel / sidelight connection</b> countersunk clamping disc</p>	<p>10, 12 mm</p>	<p><b>29.320</b></p>
				<p><b>29.357</b></p>

# Components for pivoting door system

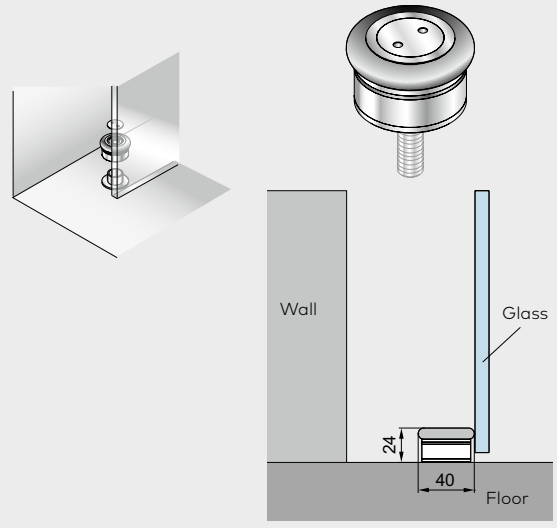
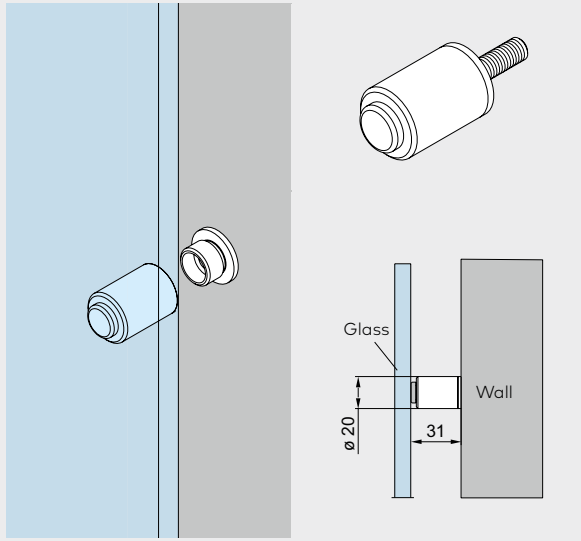
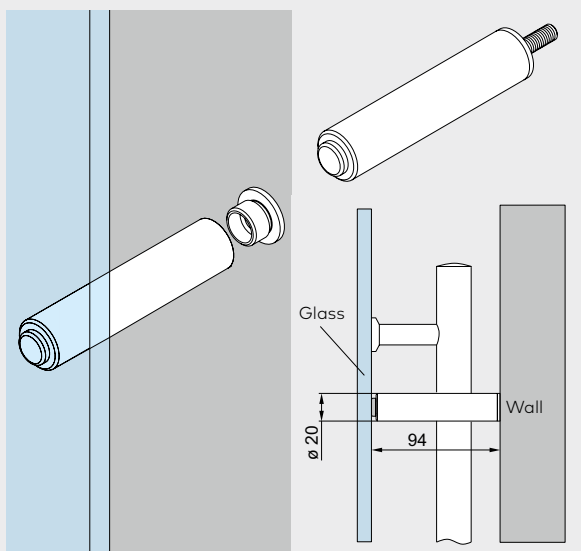
	Product description	Glass thickness	Art. No.
	<p><b>Pivot bearing fitting for overpanel with cylindrical bore for rod countersunk</b></p>	8-12 mm	<b>29.354</b>
	<p><b>Pivot bearing location for overpanel countersunk</b></p> <p>AISI 316L</p>	8-12 mm	<b>29.333</b> <b>29.353</b>
	<p><b>Pivot bearing for RTS</b></p> <p><b>Pivot pole, drilled, fixed length, for RTS pivot bearing 29.314</b></p>		<b>29.314</b> <b>29.553</b>
	<p><b>PT 25 pin</b> for ceiling connection,</p>		<b>01.115</b>
	<p><b>Pivot bearing for installation to ceiling adjustable</b></p> <p>AISI 316L</p>	8-12 mm	<b>21.319</b> <b>21.318</b>



# Accessories



	Product description	Glass thickness	Art. No.
	<p><b>Stop for pivoting door</b> with ceiling mounting</p>		<p><b>21.334</b></p>
	<p><b>Stop at overpanel</b> (inside/outside)</p>	<p>10, 12 mm</p>	<p><b>29.335</b></p>
	<p><b>Overpanel / sidelight connection</b> with stop inside countersunk</p>	<p>10, 12 mm</p>	<p><b>29.322</b></p>
	<p><b>Overpanel / sidelight connection</b> with stop outside countersunk</p>	<p>10, 12 mm</p>	<p><b>29.325</b></p>

# Accessories

	Product description	Art. No.
	<p><b>Stop for pivoting door</b> floor mounting</p>	<p><b>29.950</b></p>
	<p><b>Stop for pivoting door</b> wall mounting, short</p>	<p><b>29.951</b></p>
	<p><b>Stop for pivoting door</b> wall mounting, long</p>	<p><b>29.952</b></p>








	Product description	Glass thickness	Art. No.
	<b>Corner lock</b>	8-12 mm	<b>21.448</b>
	<b>Corner lock</b> with profile cylinder rose on inside	8-12 mm	<b>21.449</b>
	<b>Dead lock for KABA with rose</b> on inside	8-12 mm	<b>21.450</b>
	<b>Profile cylinder</b> for corner lock		<b>14.206</b>
	<b>Eccentric bushing</b> for corner lock		<b>05.194</b>
	<b>Bushing,</b> plastics		<b>00.110</b>
	<b>Strike plate</b>		<b>05.190</b>



# Glass preparation for pivoting door system

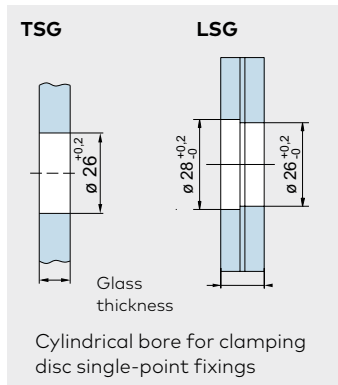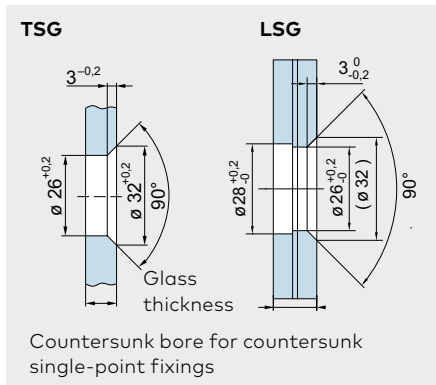


The gap and distance dimensions recommended by dormakaba are indicated in the adjacent table.

Glass thickness mm	Connection	X Gap	Y
10/12	Sidelight	5	65
	Wall	8	
13.5–15.5	Sidelight	8	62
	Wall	11	

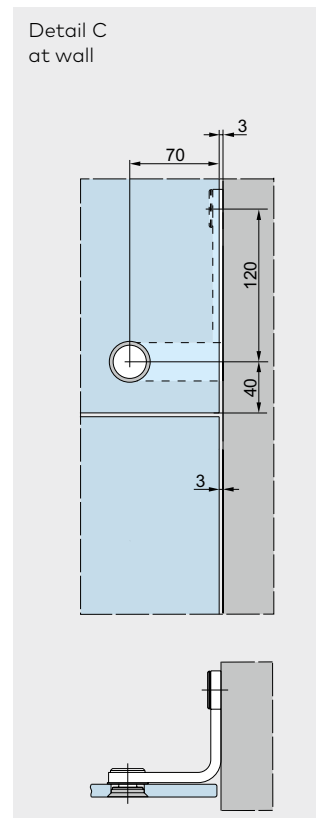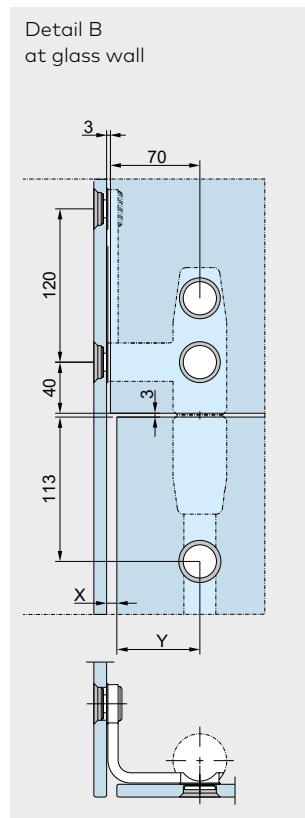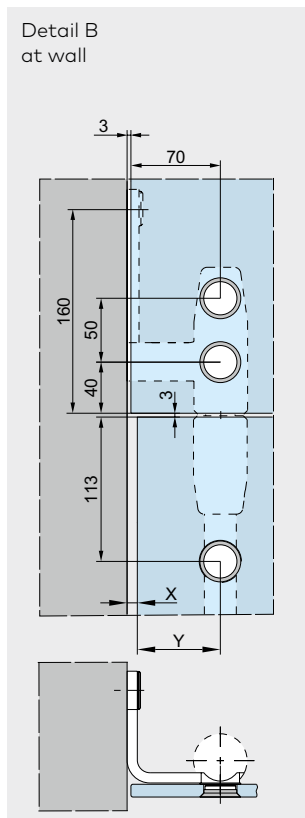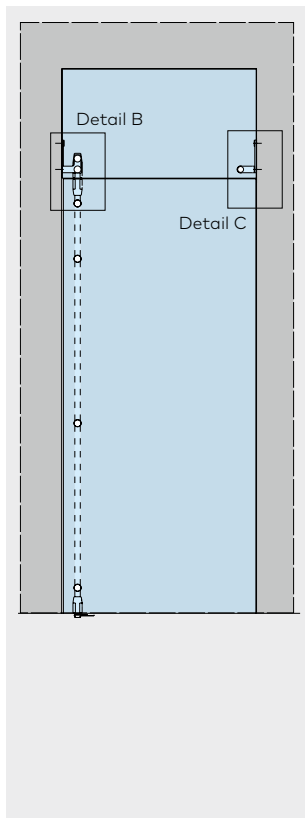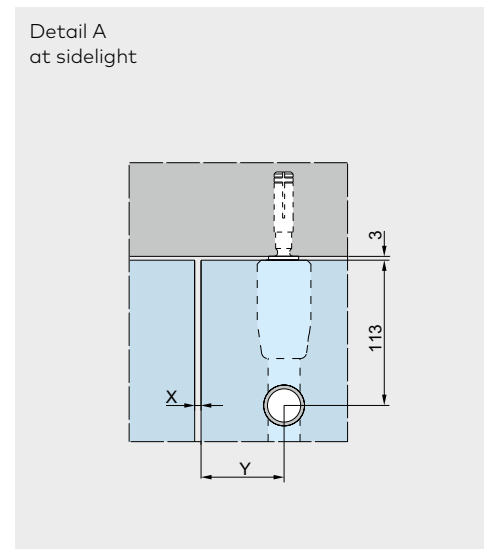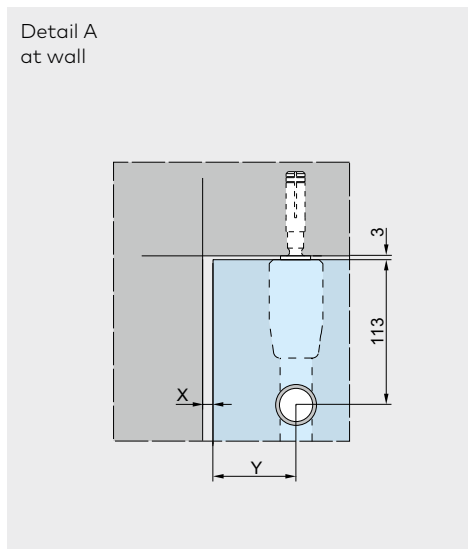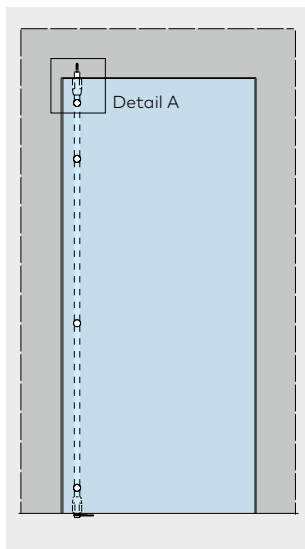


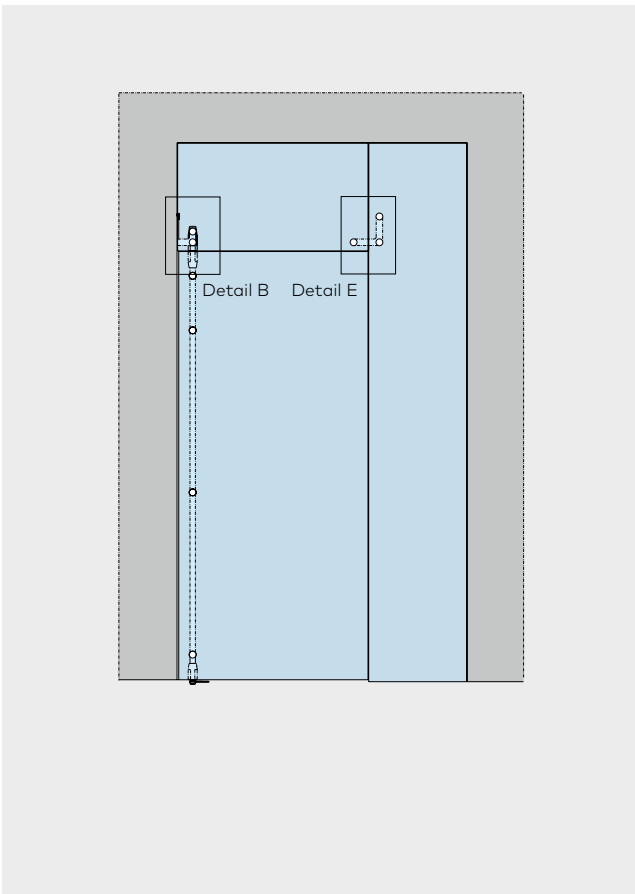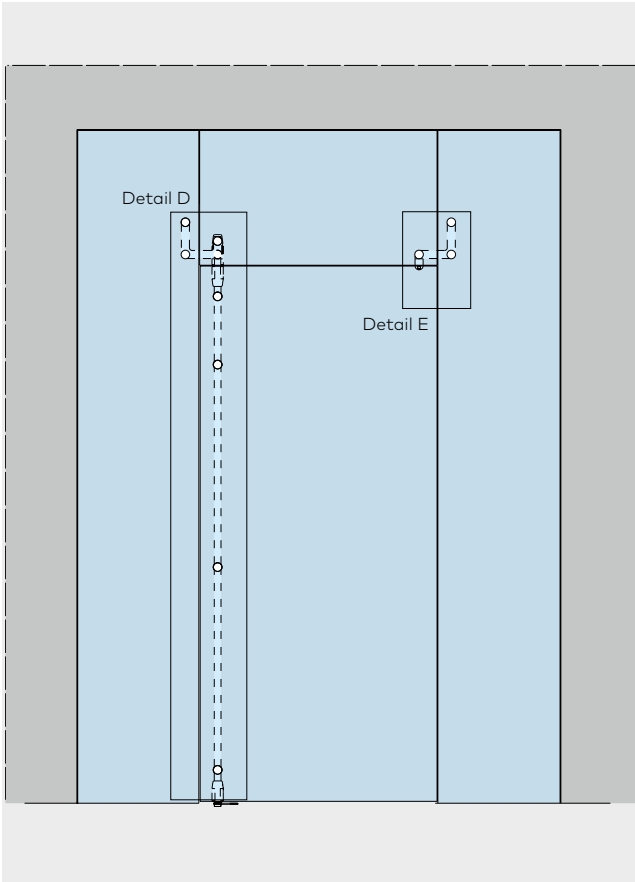


Detail D

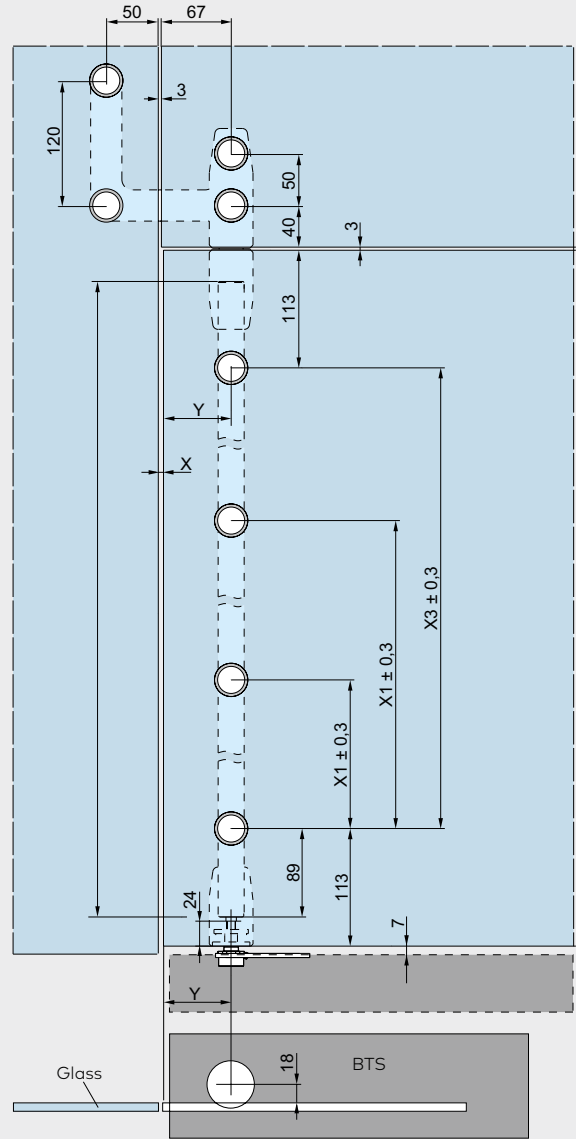

Detail E



Detail E with stop



# Content

## MANET Concept Connection system

176	<b>General information</b>
179	<b>Components</b>
180	<b>Glass preparation</b>
224	<b>Accessories</b>
248	<b>Safety-related information</b>



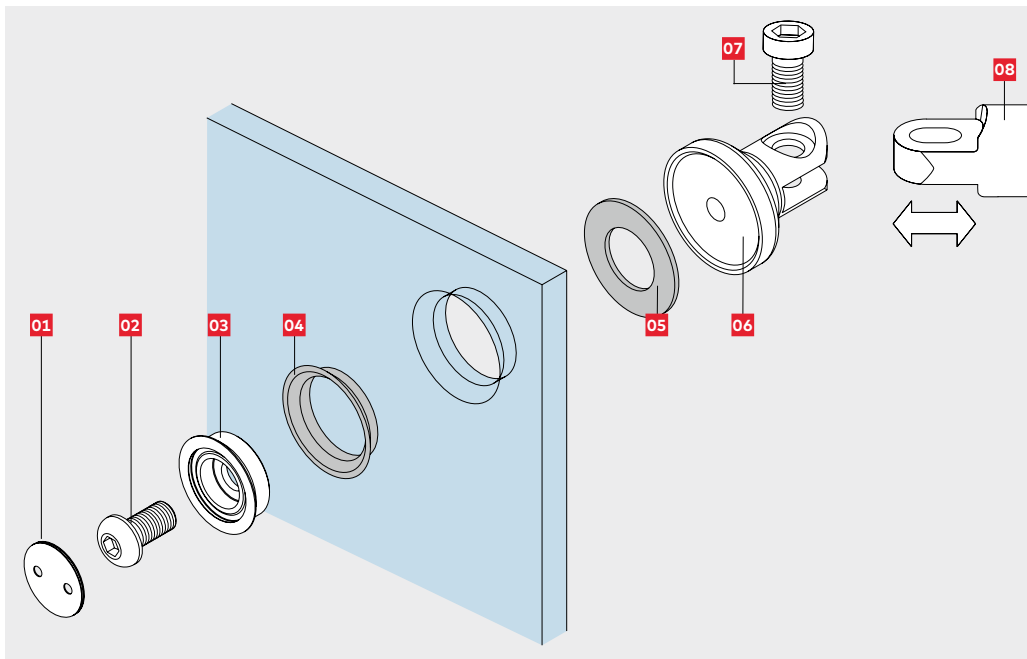
**MANET Concept  
Connection system**

# Connection system

The system approach is very much in evidence in the case of the interconnecting components. Elements such as clamping and angle connectors of various designs and also interconnecting fasteners of various lengths can be combined in order to attach glass of different thicknesses at any required angle to the floor, to ceilings, to walls and to plinth supports.

Single-point fixings flush with the glass are also used for this interconnection and glass-to-glass system. Tolerances are compensated by slotted holes in the interconnecting fasteners.


## Glass fixing



### Components

- 01** Clip-on cover
- 02** Connecting rod bolt
- 03** Conical collar
- 04** Conical sleeve
- 05** Gasket
- 06** Pivoting clamp
- 07** Connecting bolt
- 08** Connecting rod to suit length

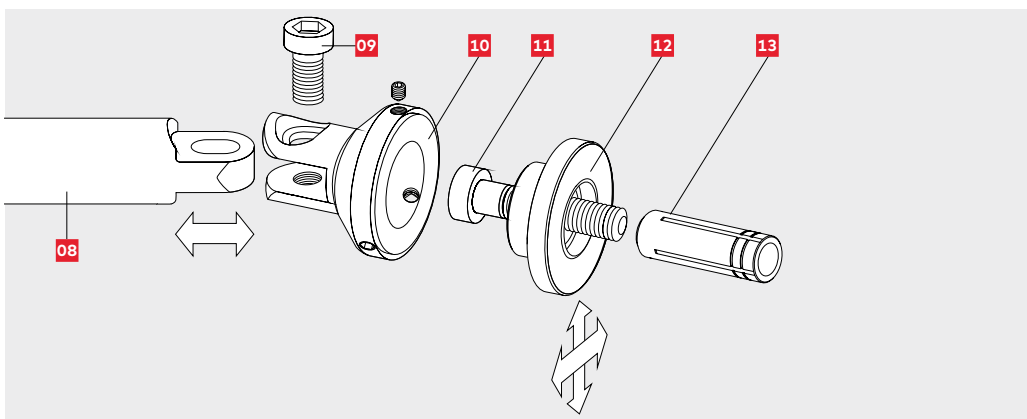
## Wall fixing




### Components

- 09** Connecting bolt
- 10** Pivoting clamp
- 11** Threaded rod M8 with small head, length and type to suit wallplug
- 12** Mounting plate, 2-dimensional adjustment
- 13** Wallplug on site to suit wall construction


### 90° – 180° Glass / Glass



### Glass / Glass Connector


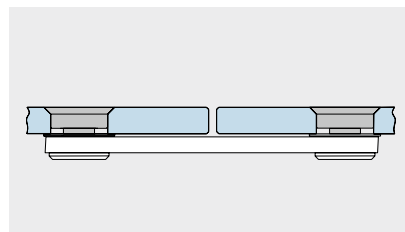


### 90° – 180° Glass / Wall







**Clamp connection glass**

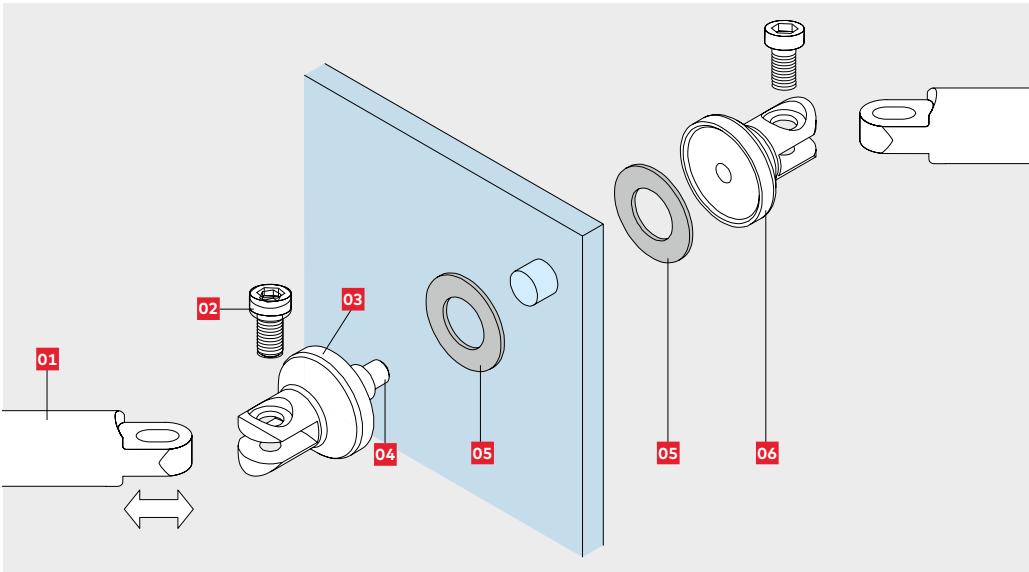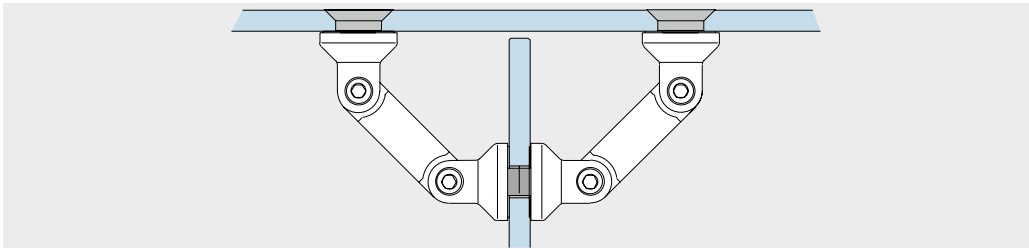

**Components**

- 01** Connecting rod or steel cable
- 02** Connecting bolt
- 03** Pivoting clamp
- 04** Connecting bolt
- 05** Gasket
- 06** Pivoting clamp

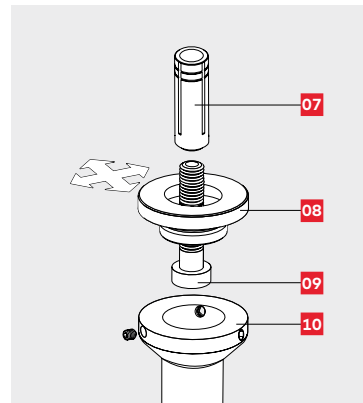
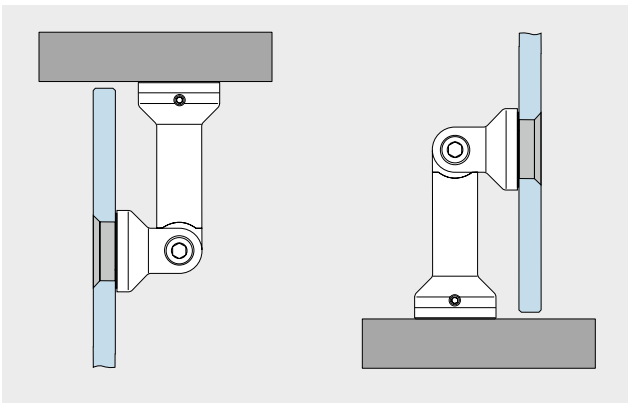
**Connection ceiling / floor**



**Components**

- 07** Wallplug on site
- 08** Mounting plate, 2-dimensional adjustable
- 09** Threaded rod M8
- 10** Column





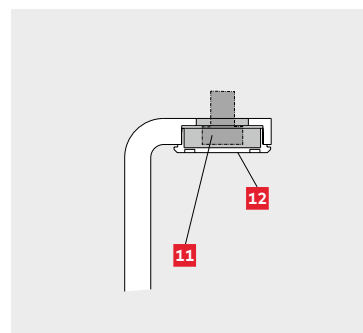
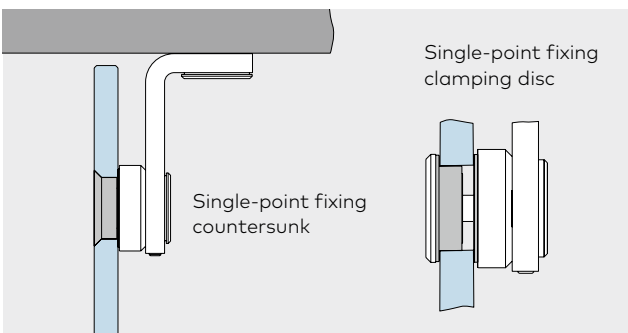
**Alternative connection ceiling**








**Components**

- 11** Threaded rod M8 DIN 7984 M10 x..., or oval-head wood screw DIN 7996 M8 x...
- 12** Clip-on cover
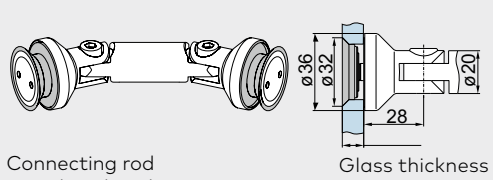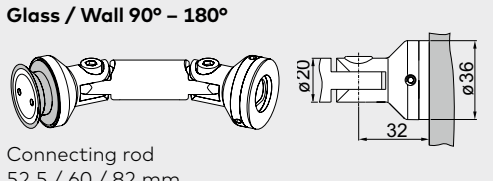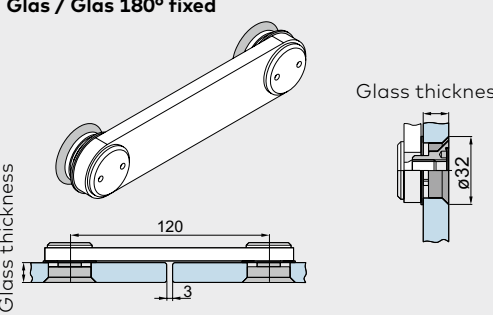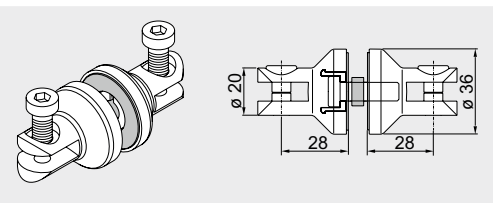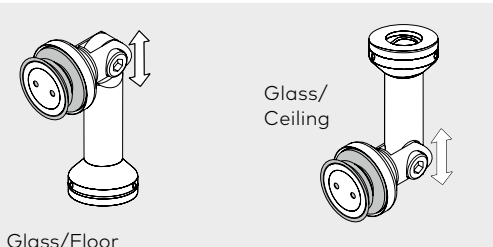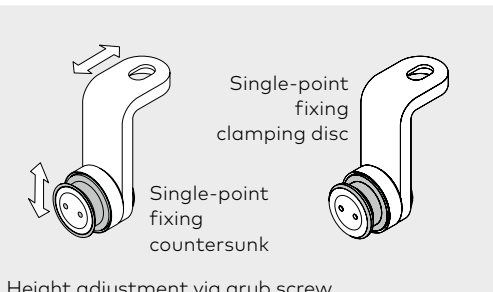
# Complete fitting

	Product description	Glass thickness	Art. No.
<p><b>Glass / Glass 90° – 180°</b></p>  <p>Connecting rod 52.5 / 60 / 82 / 103 mm</p>	<p><b>Complete fitting glass / glass</b></p> <p>With connecting rod 52.5 mm With connecting rod 60 mm With connecting rod 82 mm With connecting rod 103 mm</p>	8 – 12 mm	<p><b>29.120</b> <b>29.122</b> <b>29.125</b> <b>29.130</b></p>
<p><b>Glass / Wall 90° – 180°</b></p>  <p>Connecting rod 52.5 / 60 / 82 mm</p>	<p><b>Complete fitting glass / wall</b></p> <p>With connecting rod 52.5 mm With connecting rod 60 mm With connecting rod 82 mm</p>	8 – 12 mm	<p><b>29.139</b> <b>29.140</b> <b>29.142</b></p>
<p><b>Glas / Glas 180° fixed</b></p>  <p>Glass thickness</p> <p>120</p> <p>3</p>	<p><b>Complete fitting Connector</b></p> <p>AISI 303 AISI 316L</p>	8 – 12 mm	<p><b>29.148</b> <b>29.368</b></p>
	<p><b>Complete fitting Clamping connector</b></p>	8 – 12 mm	<b>29.149</b>
 <p>Glass/Floor</p> <p>Glass/ Ceiling</p>	<p><b>Complete fitting Corner connector 90°</b> (only bearing function)</p>	8 – 12 mm	<b>29.145</b>
 <p>Single-point fixing clamping disc</p> <p>Single-point fixing countersunk</p> <p>Height adjustment via grub screw</p>	<p><b>Complete fitting Ceiling fixing</b> (bearing function)</p> <p>countersunk AISI 316L clamping disc AISI 316L</p>	8 – 12 mm	<p><b>29.337</b> <b>29.339</b> <b>29.338</b> <b>29.340</b></p>


# Components

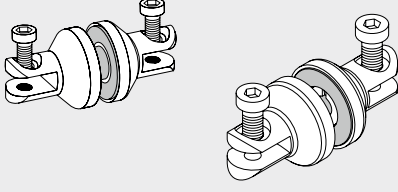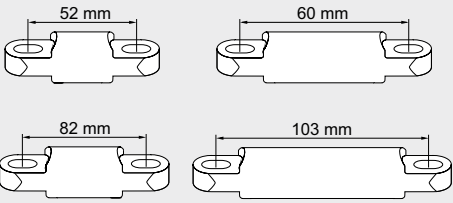	Product description	Glass thickness	Art. No.
	<b>Pivoting glass clamp</b> inclusive screw sets for glass	8 – 12/13.5 – 17.5 mm	
	countersunk	17.5 – 21.5 mm	<b>29.160</b>
	clamping disc		<b>29.165</b>
	<b>Pivoting wall fixing</b>		<b>21.141</b>
	<b>Column</b> Ceiling/floor fixing		<b>21.146</b>
	<b>Clamping connector</b>	8 – 12 mm	<b>21.149</b>
	<b>Connecting rods</b> Length 52.5 mm Length 60 mm Length 82 mm Length 103 mm		<b>21.355</b> <b>21.356</b> <b>21.357</b> <b>21.358</b>


# Glass preparation connection system

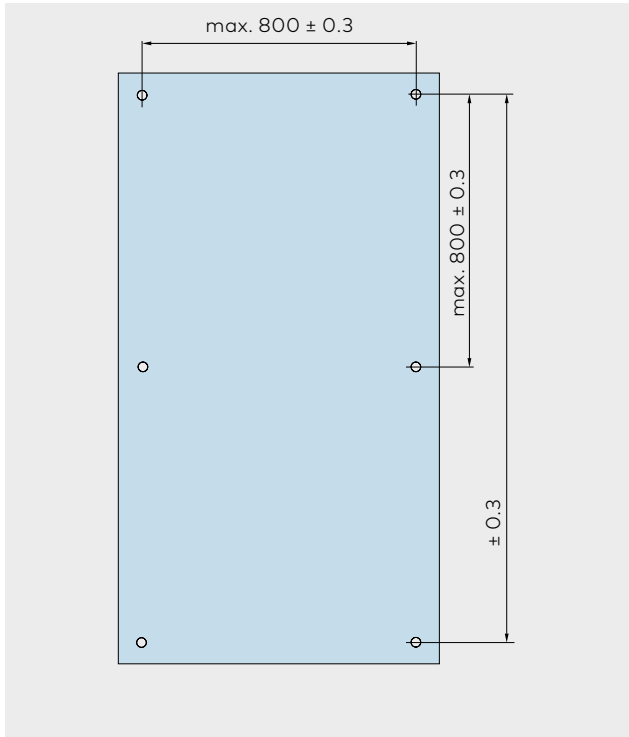For TSG and LSG from TSG.


Recommended centers for fixed glazing element




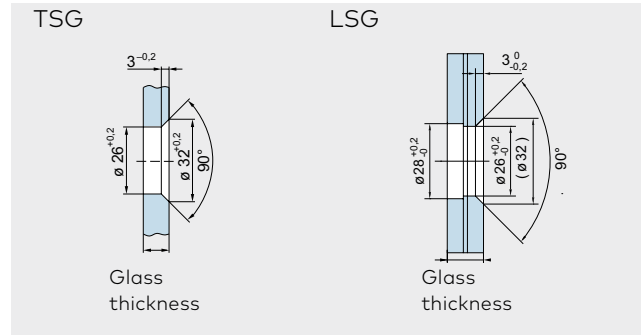
Countersunk bore for countersunk single-point fixings



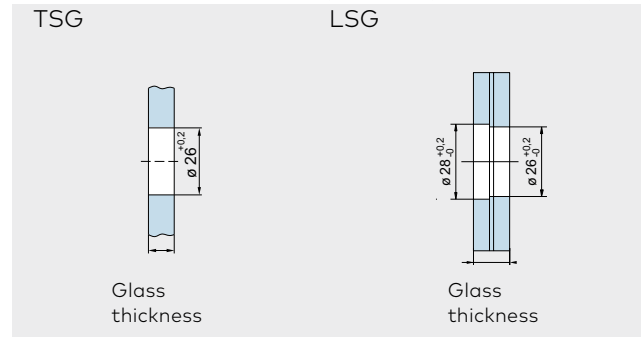Cylindrical bore for clamping disc single-point fixings



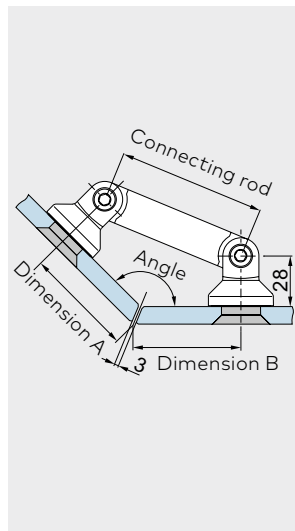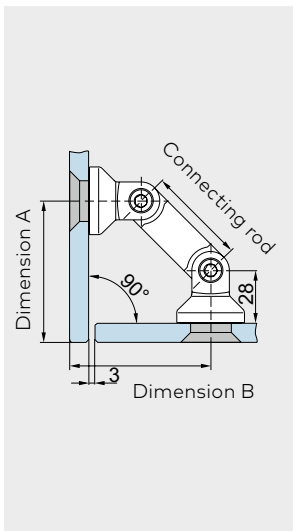
Corner connectors glass / glass 90 – 180°




Corner connectors glass / glass (dimensions in mm)

Angle	Length of connecting rod			
	52.5	60	82	103
90°	75	80	96	A/B
95°	70	75	90	A/B
100°	66	71	85	A/B
105°	62	67	81	A/B
110°	59	63	77	A/B
115°	55	60	73	A/B
120°	52	56	69	A/B
125°	49	54	66	A/B
130°	47	51	63	A/B
135°	44	48	60	A/B
180°				50

**Clamping connector**

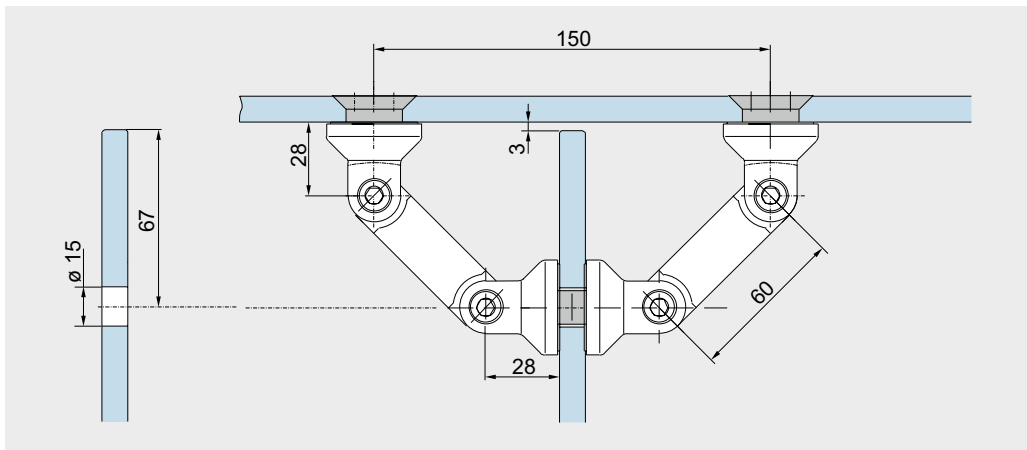


**Corner connectors glass / wall 90 – 180°**

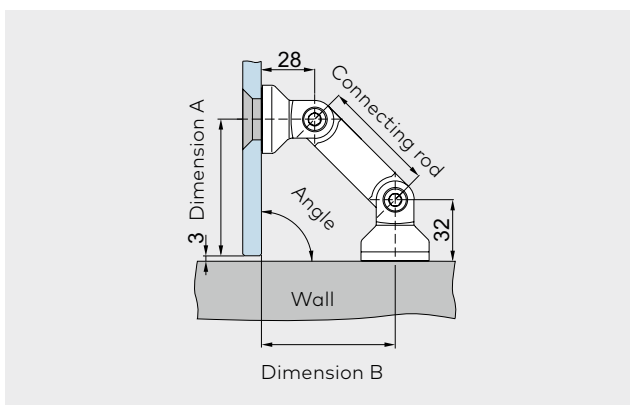


**Glass / wall (dimensions in mm)**

	Length of connecting rod		
	52.5	60	82
Dimensions for 10 mm glass thickness. Consider variants for other glass thicknesses.			
Angle	A/B	A/B	A/B
90°	67/65	72/70	87.5/86

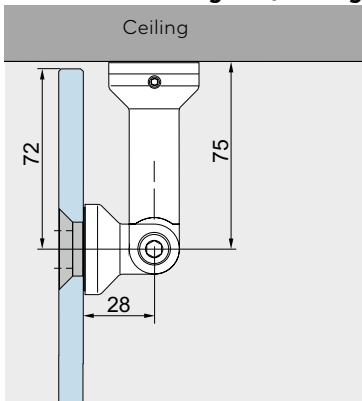
**Corner connector glass / ceiling**



**Corner connector glass / floor**

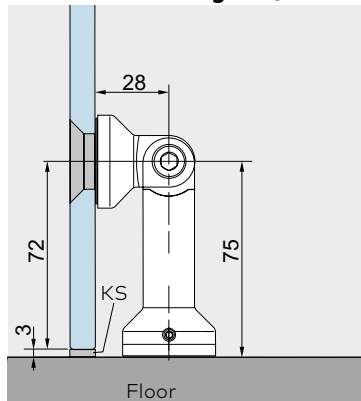

**Ceiling fixing (bearing)**

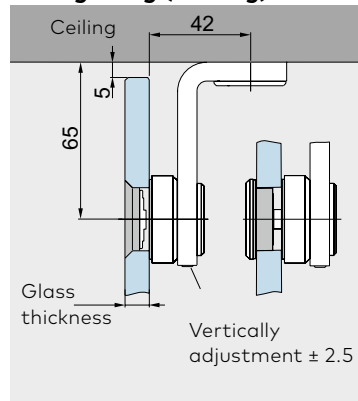


**Note:** Ensure compliance with minimum glass/bore clearances as per glass manufacturer recommendations. Glass preparation with a tolerance of max. ± 0.3 mm is recommended.

# Content
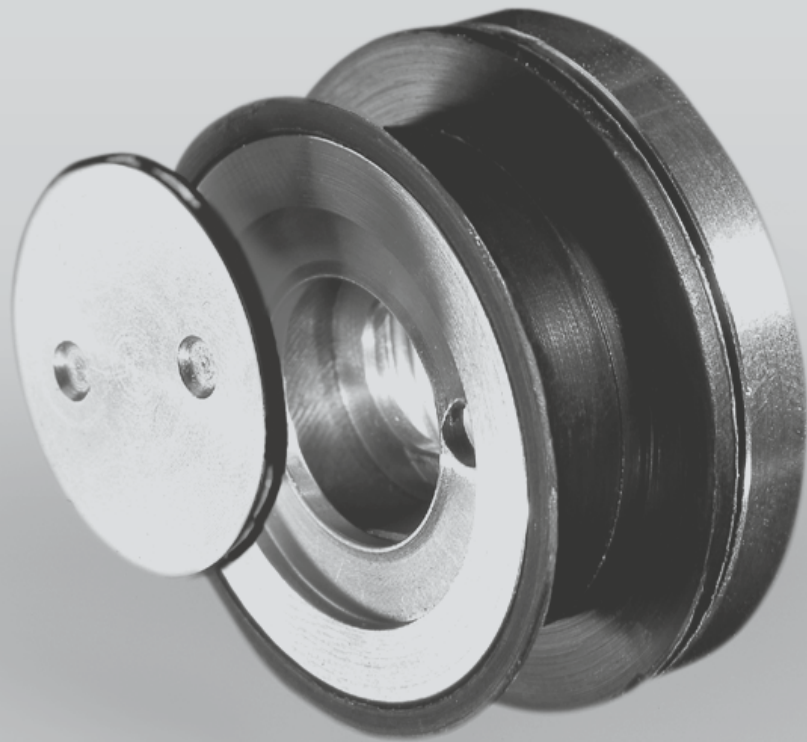
## MANET Concept Single-point fixing

184	<b>General information</b>
185	<b>Components</b>
186	<b>Type illustrations</b>
187	<b>Glass preparation</b>
224	<b>Accessories</b>
248	<b>Safety-related information</b>



# **MANET Concept**

## **Single-point fixing**

## Single-point fixing serie S32/35



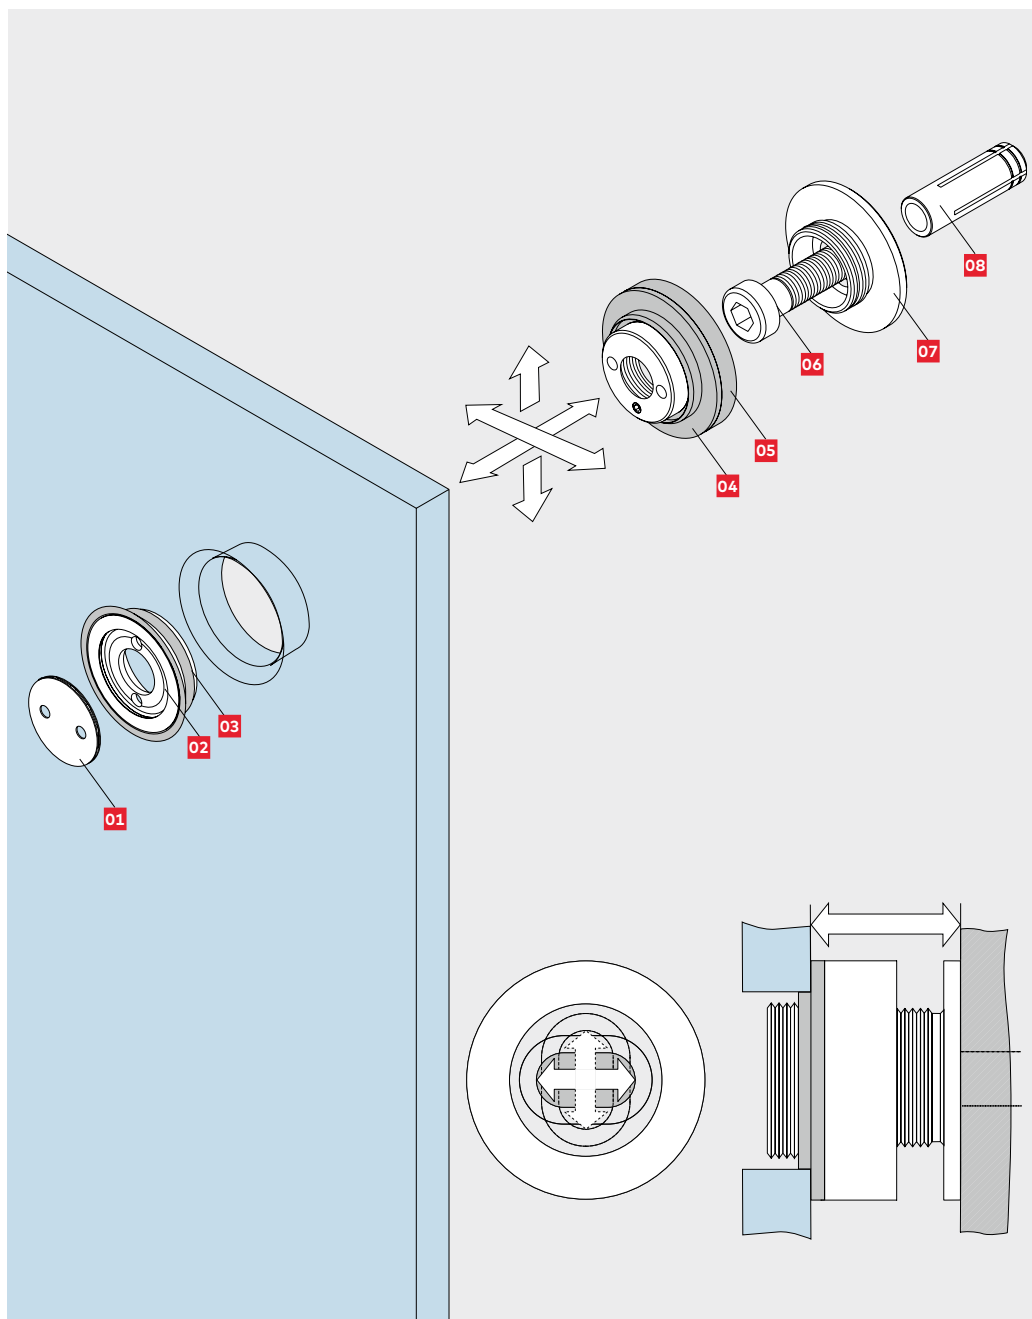
The basic component within the MANET system is the single-point fixing. Rather than cylindrical bore in the glass, this component has a tapered countersunk bore for a perfect seated fit to the glass. These give a flush finish of the single-point fixing in all applications.

The three-dimensional adjustability incorporated within the fitting ensures ideal compensation for structural and drilling tolerances. Constraint-free transmission of all the forces acting on the glass to the substructure is also ensured.



### Simple installation and metric adjustment


- The fixing and the gasket are wound onto the adjustment screw (7) already fitted to the wall, with the glass panel then being simply mounted over the top.
- The adjustment screw allows the position of the glass to be adjusted in 3 dimensions. An adjustment range of  $\pm 2$  mm in the vertical and lateral directions can be utilized by rotating the adjustment screw by up to  $90^\circ$ .
- Then it is simply a matter of aligning and securing the single-point fixing and conical sleeve. The clip-on cover (1) provides for a flush appearance.



### Components

- 01** Clip-on cover
- 02** Pin internal thread
- 03** Conical sleeve
- 04** Gasket
- 05** Fixing
- 06** Threaded rod M8 with small head (e.g. DIN 6912). Length and type to suit wallplug
- 07** Adjustment screw
- 08** Wallplug on site to suit wall construction

# Types



**Single-point fixing, glass / wall**  
 wall offset  
 8.5 – 11.5 mm,  
 adjustable

**Countersunk**  
 8/10 mm glass  
**Art. No. 29.200**

12 mm glass  
**Art. No. 29.210**

13.5 mm glass  
**Art. No. 29.240**

15 mm glass  
**Art. No. 29.244**

17.5 mm glass  
**Art. No. 29.248**


**Clamping disc**  
 8/10 mm glass  
**Art. No. 29.700**

12 mm glass  
**Art. No. 29.705**

13.5 mm glass  
**Art. No. 29.710**

15 mm glass  
**Art. No. 29.715**

17.5 mm glass  
**Art. No. 29.720**



**Single-point fixing, glass / wall**  
 wall offset  
 11.5 – 14.5 mm,  
 adjustable

**Countersunk**  
 8/10 mm glass  
**Art. No. 29.201**

12 mm glass  
**Art. No. 29.211**

13.5 mm glass  
**Art. No. 29.241**

15 mm glass  
**Art. No. 29.245**

17.5 mm glass  
**Art. No. 29.249**


**Clamping disc**  
 8/10 mm glass  
**Art. No. 29.701**

12 mm glass  
**Art. No. 29.706**

13.5 mm glass  
**Art. No. 29.711**

15 mm glass  
**Art. No. 29.716**

17.5 mm glass  
**Art. No. 29.721**



**Single-point fixing, glass / wall**  
 wall offset  
 14.5 – 22 mm,  
 adjustable

**Countersunk**  
 8/10 mm glass  
**Art. No. 29.202**

12 mm glass  
**Art. No. 29.212**

13.5 mm glass  
**Art. No. 29.242**

15 mm glass  
**Art. No. 29.246**

17.5 mm glass  
**Art. No. 29.250**


**Clamping disc**  
 8/10 mm glass  
**Art. No. 29.702**

12 mm glass  
**Art. No. 29.707**

13.5 mm glass  
**Art. No. 29.712**

15 mm glass  
**Art. No. 29.717**

17.5 mm glass  
**Art. No. 29.722**



**Single-point fixing, glass / wall**  
 fixed wall offset  
 6 mm,  
 not adjustable

**Countersunk**  
 8/10 mm glass  
**Art. No. 29.205**

12 mm glass  
**Art. No. 29.215**

13.5 mm glass  
**Art. No. 29.243**

15 mm glass  
**Art. No. 29.247**

17.5 mm glass  
**Art. No. 29.251**

**Clamping disc**  
 8/10 mm glass  
**Art. No. 29.730**

12 mm glass  
**Art. No. 29.731**

13.5 mm glass  
**Art. No. 29.732**


15 mm glass  
**Art. No. 29.733**

17.5 mm glass  
**Art. No. 29.734**


Stainless steel quality AISI 316L on request.

# Glass preparation connection system

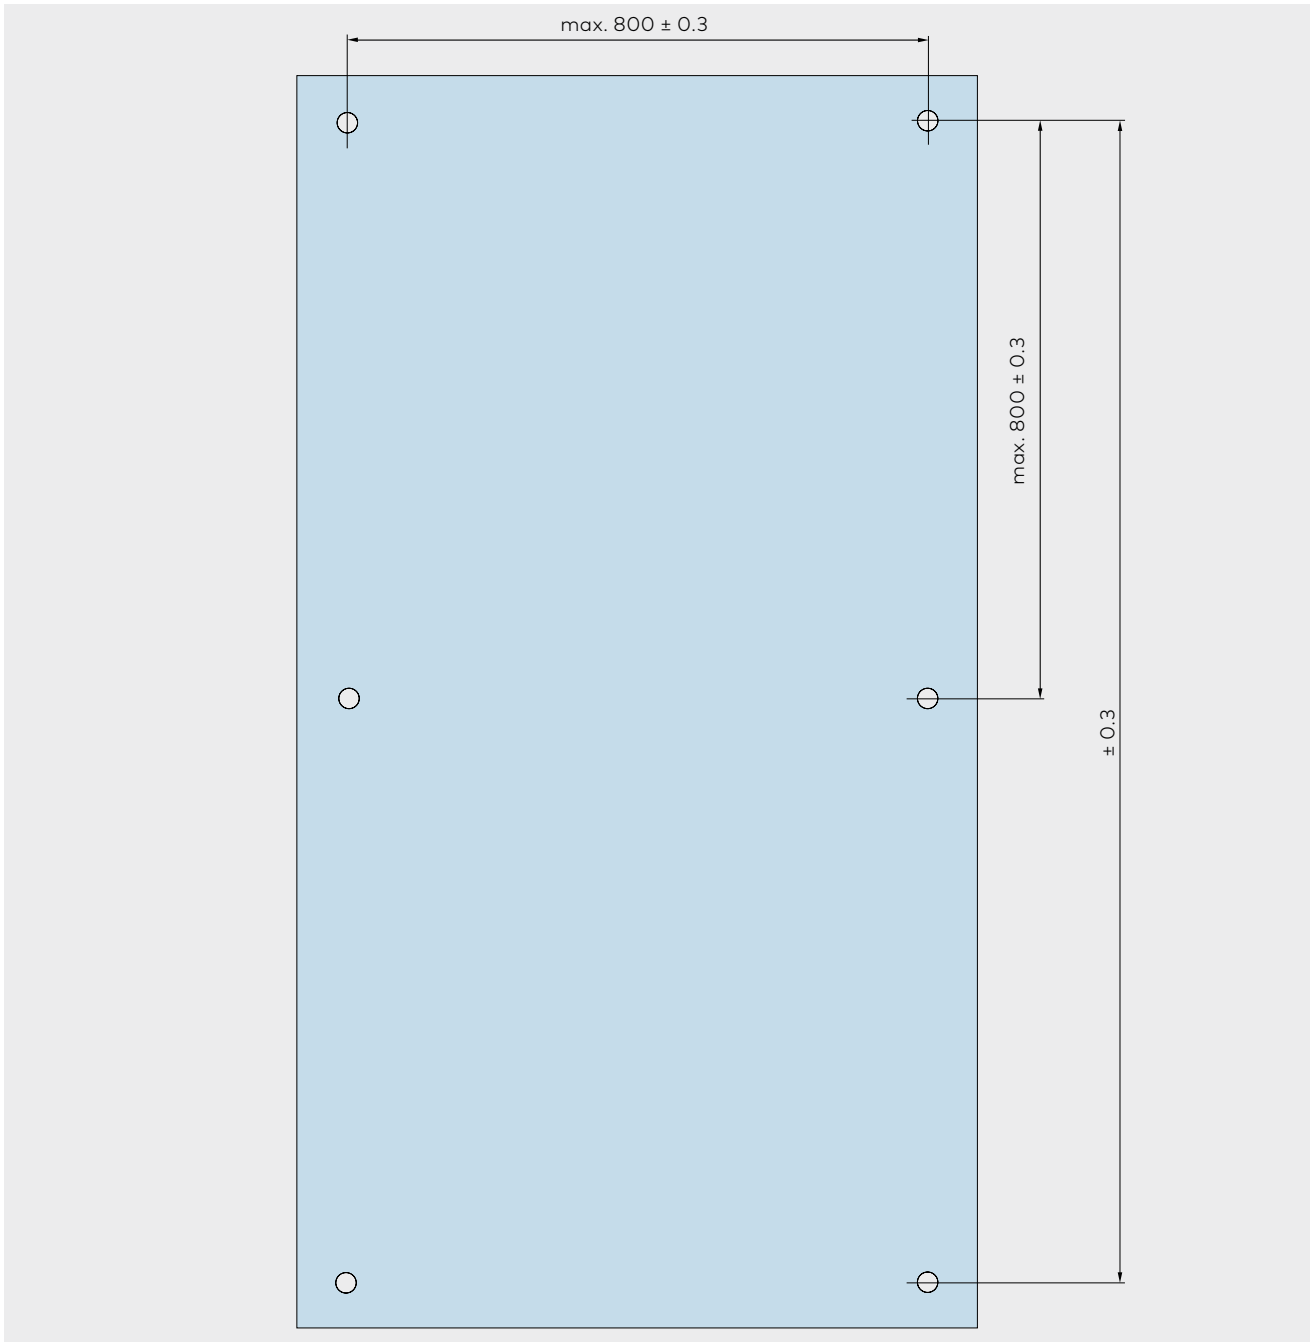
For TSG and LSG from TSG. Recommended centers for fixed glazing element



## TSG

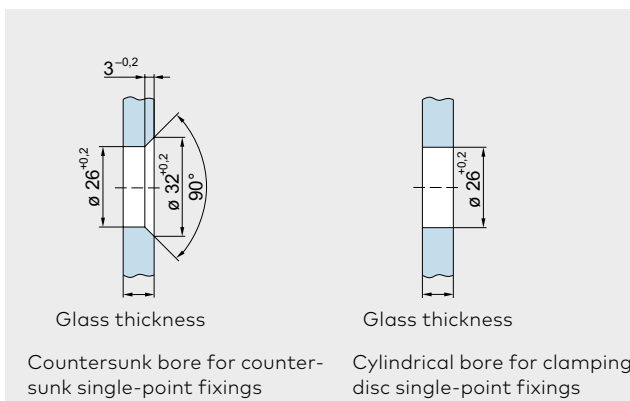

## LSG

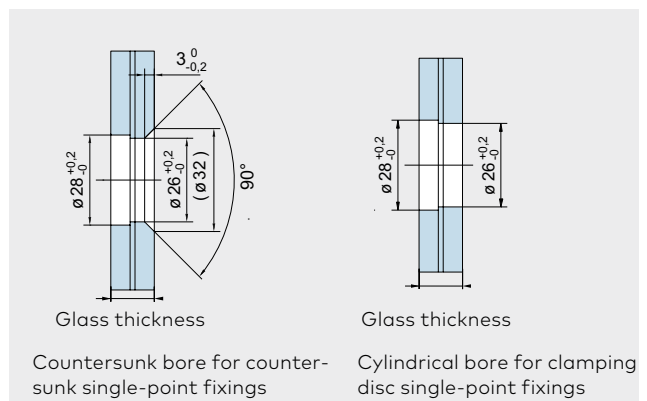

# Content

## SG

190	<b>General information</b>
190	<b>Components</b>
204	<b>Glass preparation</b>
224	<b>Accessories</b>
248	<b>Safety-related information</b>



**SG**

# A range of locks for all requirements

It doesn't matter what sort of glass door needs securing, what function it has to fulfill, or the type of fittings specified – there will be a lock in the SG range which will provide the shape, the function and the finish which you require.

### Simple glass preparation, firm fixing

dormakaba has an intimate knowledge of the special properties of glass as a building material. This has led to the design of locks requiring only simple cut-outs or holes in the glass. Carefully considered and positive measures have been taken to create the maximum clamping surface with optimum clamping efficiency.

### Reliability built in

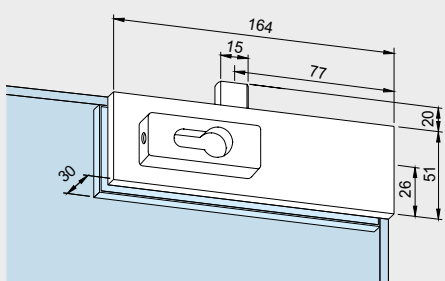
Quality materials and thorough workmanship mean that SG locks have the features necessary to meet the most demanding of specifications. Many satisfied customers will testify this. For safety reasons set lock case always on inside.

### Short delivery times






All the common patterns and types are available ex-stock (factory). Specials will be prepared promptly.

## UNIVERSAL top, bottom, centre locks and strike boxes with glass cut-outs






Complete, for 10 mm glass thickness

	Product description	Glass thickness	Art. No.
	<p><b>US 10 corner lock,</b> prepared for Europrofile cylinder, single throw, bolt projection 20 mm, with security rosettes on both sides, 14 mm thick. Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 232.</p> <p><b>Lock insert:</b></p> <ul style="list-style-type: none"> <li>• high corrosion resistance according to EN 1670</li> <li>• with regard to type-test according to DIN 18251, class 3*</li> </ul> <p>Not illustrated: prepared for KABA</p>	10 mm	<b>03.206</b>
	For half profile cylinder	10 mm	<b>03.340</b>
	left hand top/right hand bottom	10 mm	<b>03.288</b> not illustr.
	Weight in kg/m: Aluminum 0.942 Brass 1.061 Stainless steel 1.053		
	left hand bottom/right hand top	10 mm	<b>03.287</b> not illustr.

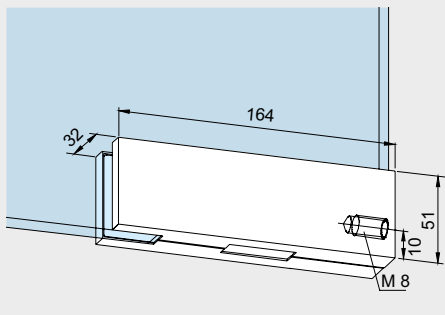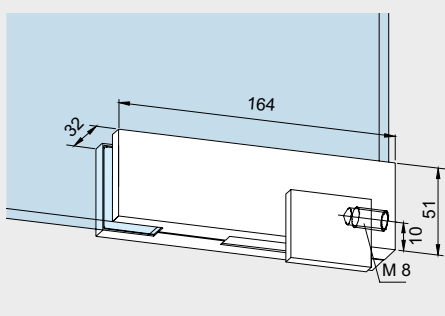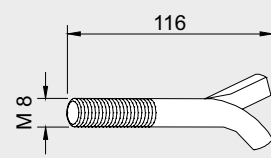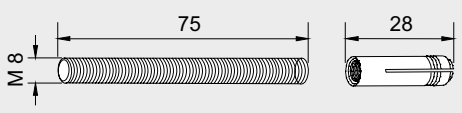\*Extract from DIN 18251, class 3: Type-test with 50,000 locking bolt operating cycles. Furthermore the lock was tested successfully by a neutral testing institute with 500,000 latch and 100,000 locking bolt operating cycles.




	Product description	Glass thickness	Art. No.
	<p><b>GK 30 single overpanel strike box</b> to suit US 10 corner lock</p> <p>Weight in kg: Aluminum 0.418 Stainless steel 0.536</p>	10 mm	<b>03.230</b>
	<p><b>GK 30</b> with stop</p>		<b>*03.234/ 03.235</b>
	<p><b>Fixing plate</b> for overpanel strike box GK 30 UNIVERSAL</p> <p>Weight in kg: Aluminum 0.016 Brass 0.038</p> <p>Stainless steel not available, satin chrome on brass supplied.</p>		<b>03.128</b>
	<p><b>Wall anchor</b> with thread M 8 for overpanel patch UNIVERSAL</p> <p>Weight in kg: 0.040</p>		<b>01.133</b>
	<p><b>Threaded rod</b> M 8 with plug for overpanel patch UNIVERSAL</p> <p>Weight in kg: 0.032</p>		<b>01.134</b>

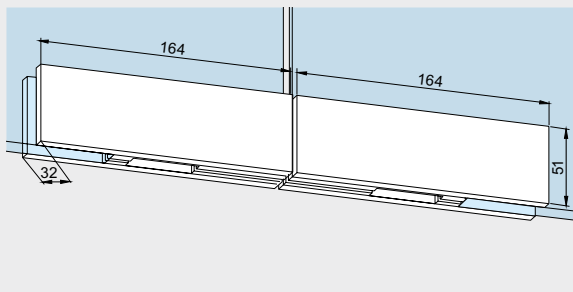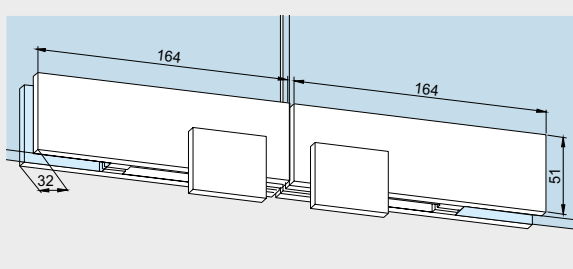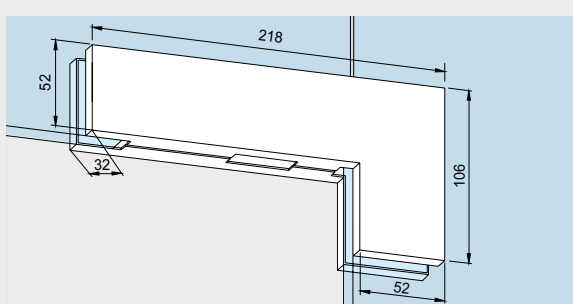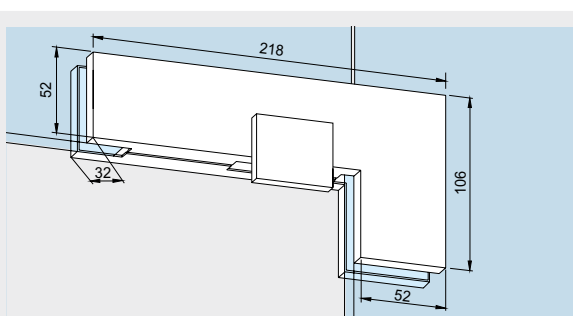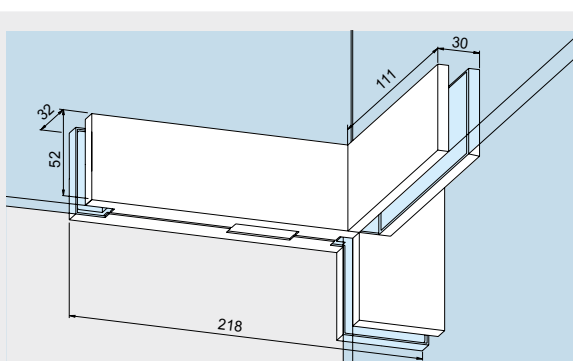\* Left / right hand (illustration shows left hand) are determined by view from hanging side.

	Product description	Glass thickness	Art. No.
	<p><b>GK 20 double overpanel strike box</b> to suit US 10 corner locks, consisting of two GK 30 with threaded connecting bolt</p> <p>Weight in kg:                      Aluminum 0.866                      Brass 1.154                      Satin stainless steel (700) 1.200</p> <p>Suitable for glass thicknesses up to max. 12 mm. If thicker glass is required, please talk first to our Applications Engineering people.</p>	10 mm	<b>03.245</b>
	<p><b>GK 20</b> with stop</p> <p>Weight in kg:                      Aluminum 0.926                      Brass 1.234                      Satin stainless steel (700) 1.192</p> <p>Suitable for glass thicknesses up to max. 12 mm. If thicker glass is required, please talk first to our Applications Engineering people.</p>		<b>03.247</b>
	<p><b>GK 40</b> <b>corner overpanel strike box</b> to suit US 10 corner lock</p> <p>Weight in kg:                      Aluminum 0.709                      Brass 1.035                      Stainless steel 1.010</p>		<b>03.250</b>
	<p><b>GK 40</b> with stop</p> <p>Weight in kg:                      Aluminum 0.769                      Stainless steel 1.082</p>		<b>*03.254 / 03.255</b>
	<p><b>GK 41 strike box</b> for PT 41, with fin fitting</p> <p>Weight in kg:                      Aluminum 0.906                      Stainless steel 1.270</p>		<b>*03.194 / 03.193</b>

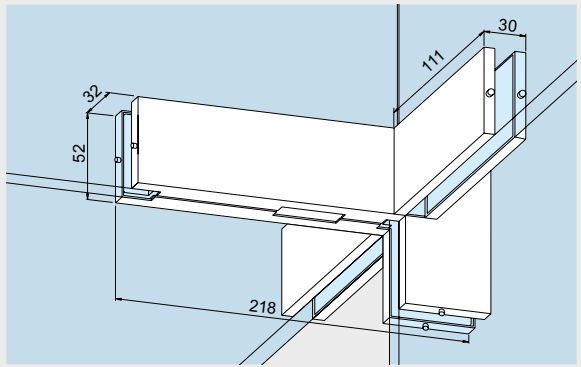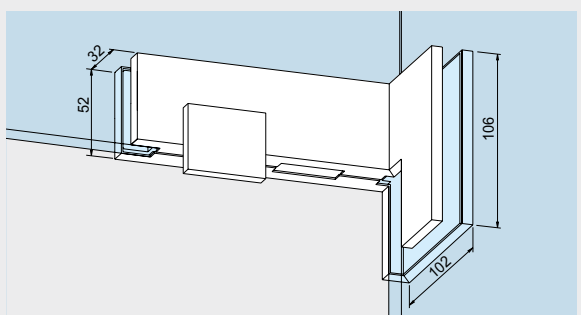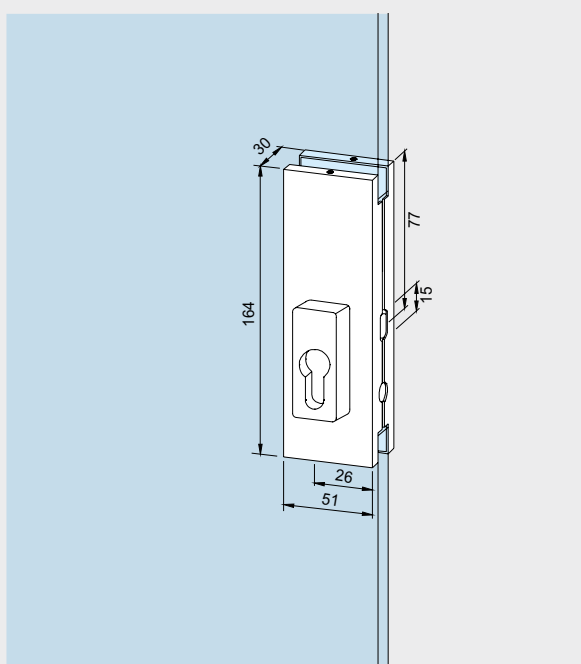\* Left / right hand (illustration shows left hand) are determined by view from hanging side.




	Product description	Glass thickness	Art. No.
	<p><b>GK 41 strike box</b> with fin fitting on both sides</p> <p>Weight in kg: Aluminum 1.103 Stainless steel 1.411</p>		<p><b>03.195</b></p>
	<p><b>GK 42 strike box,</b> <b>angle 90°, for PT 42,</b> <b>with stop inside</b></p> <p>Weight in kg: Aluminum 0.910 Stainless steel 1.306</p> <p>Not illustrated: GK 42, angle 135°</p>		<p><b>*03.274/ 03.275</b></p> <p><b>*03.276/ 03.277</b></p>
	<p><b>US 20 centre lock,</b> prepared for Europrofile cylinder, single throw, bolt projection 20 mm, with security rosettes 14 mm thick.</p> <p>Weight in kg: Aluminum 0.942 Brass 1.061 Stainless steel 1.053</p> <p><b>Lock insert:</b></p> <ul style="list-style-type: none"> <li>• high corrosion resistance according to EN 1670, class 4</li> <li>• with regard to type-test according to DIN 18251, class 3**</li> </ul> <p>Weight in kg: Aluminum 0.805 Stainless steel 0.925</p> <p>prepared for KABA</p> <p>Prepared for one-sided Europrofile cylinder (see drawing 03.215)</p>	<p>10 mm</p>	<p><b>03.215</b></p> <p><b>03.345</b> not illustr.</p> <p><b>*03.290/ 03.289</b></p>

\* Left / right hand (illustration shows left hand) are determined by view from hanging side.  
 \*\* Extract from DIN 18251, class 3: Type-test with 50,000 locking bolt operating cycles. Furthermore the lock was tested successfully by a neutral testing institute with 500,000 latch and 100,000 locking bolt operating cycles.




	Product description	Glass thickness	Art. No.						
	<p><b>GK 50 strike box</b> to suit US 20 centre lock</p> <p>Weight in kg:</p> <table data-bbox="766 492 1021 582"> <tr> <td>Aluminum</td> <td>0.602</td> </tr> <tr> <td>Brass</td> <td>0.730</td> </tr> <tr> <td>Stainless steel</td> <td>0.727</td> </tr> </table>	Aluminum	0.602	Brass	0.730	Stainless steel	0.727	<p>10 mm</p>	<p><b>03.224</b></p>
Aluminum	0.602								
Brass	0.730								
Stainless steel	0.727								

# Corner (OR centre) locks and strike boxes with drilled holes glass preparation

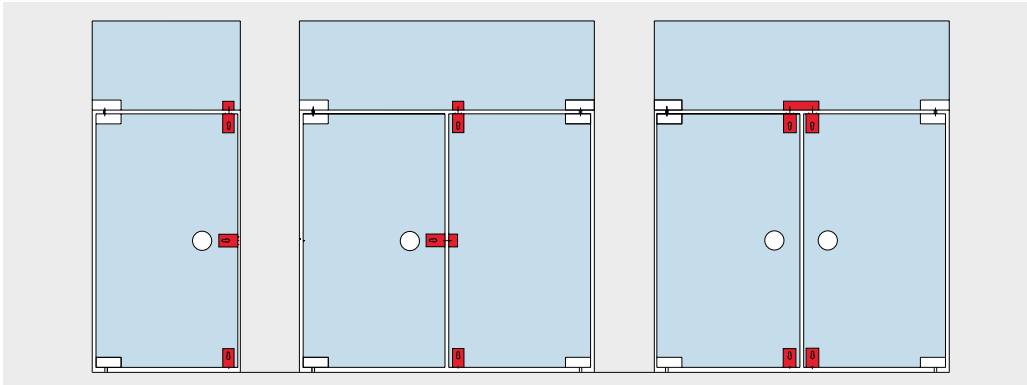Complete for 8, 10 and 12 mm glass thickness





		Product description	Art. No.
	<p><b>Corner lock,</b> for vertical or horizontal fixing, double throw, bolt projection 20 mm, hardened oval bolt, prepared for Europrofile cylinder</p> <p>Weight in kg: Aluminum 0.849 Brass 1.033</p>	<b>05.100</b>	
	<p>prepared for KABA</p> <p>Weight in kg: Aluminum 0.842 Brass 1.020</p>	<b>05.105</b> not illustr.	
	<p>Prepared for one-sided Europrofile cylinder, lockable from inside</p> <p>Weight in kg: Aluminum 0.858 Brass 1.038</p>	<b>05.116</b> not illustr.	
	<p><b>Corner lock,</b> prepared for Europrofile cylinder, rose inside</p> <p>Weight in kg: Aluminum 0.924 Brass 1.236</p>	<b>05.118</b>	

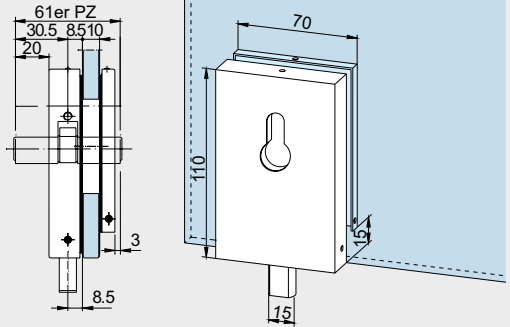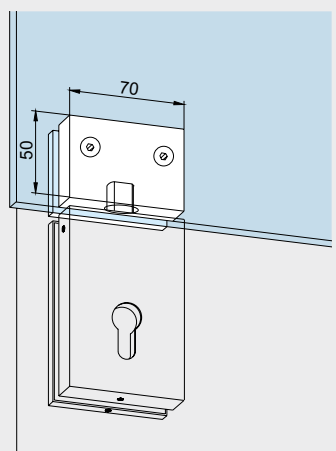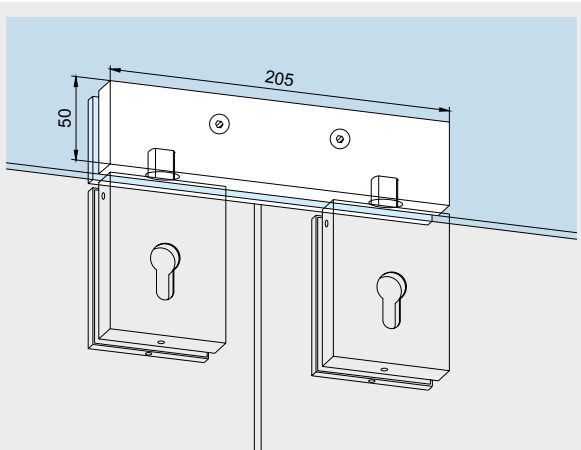	Product description	Art. No.
	<p><b>Corner lock,</b> for vertical fixing, double throw, bolt projection 20 mm, hardened oval bolt, counterplate shortened to give 15 mm free glass edge, prepared for Europrofile cylinder</p> <p>Weight in kg: Aluminum 0.807</p> <p>Prepared for one-sided Europrofile cylinder, lockable from inside</p> <p>Weight in kg: Aluminum 0.818 Brass 0.984</p> <p>Prepared for Europrofile cylinder, rose inside</p> <p>Weight in kg: Aluminum 0.882 Brass 1.184</p>	<p><b>05.103</b></p> <p><b>05.117</b> not illustr.</p> <p><b>05.119</b> not illustr.</p>
	<p><b>Strike box</b> to suit corner lock (05.100, 05.105, 05.116), for single door without stop</p> <p>Weight in kg: Aluminum 0.260 Brass 0.765</p> <p>with stop for Art. No. 05.103, 05.117, 05.119</p> <p>Weight in kg: Aluminum 0.264 Brass 0.760</p>	<p><b>05.108</b></p> <p><b>05.109</b> not illustr.</p>
	<p><b>Strike box</b> for corner lock (05.100, 05.116), for double doors without stop</p> <p>Weight in kg: Aluminum 0.760</p> <p>with stop for Art. No. 05.100, 05.105, 05.116, 05.118</p> <p>Weight in kg: Aluminum 0.770</p>	<p><b>05.110</b></p> <p><b>05.111</b> not illustr.</p>


# Corner and centre locks without glass preparation

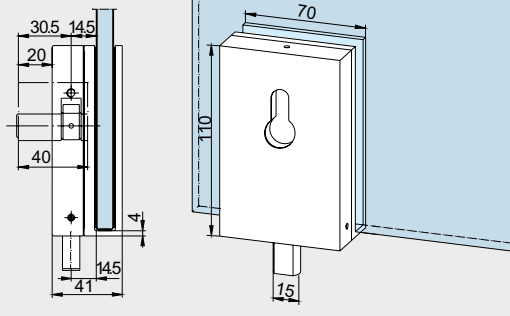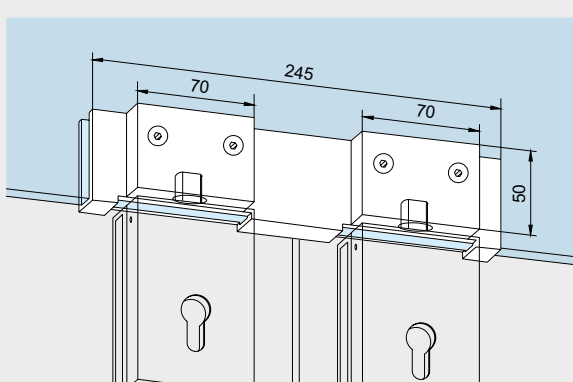Complete, for 10 and 12 mm glass thickness

	Product description	Glass thickness	Art. No.
	<p><b>Slide over corner lock</b> for single- and double-action doors for retrofitting, double throw, bolt projection 20 mm, hardened oval bolt, prepared for Euro-profile cylinder</p> <p>Special model for 8 mm glass also available.</p> <p>Weight in kg: Aluminum 0.740</p> <p>prepared for KABA</p> <p>Weight in kg: Aluminum 0.735</p>	<p>10 mm <b>05.106</b> 12 mm <b>05.130</b></p>	
	<p><b>Slide over strike box</b> for slide over corner lock for single door</p> <p>Weight in kg: Aluminum 0.341</p> <p>for Art. No. 05.106/05.107</p> <p>for Art. No. 05.130/05.131</p>	<p>10 mm <b>05.112</b> 12 mm <b>05.132</b></p>	
	<p><b>Slide over strike box</b> for slide over corner lock for double doors</p> <p>Weight in kg: Aluminum 0.737</p> <p>for Art No. 05.106/05.107</p> <p>for Art No. 05.130/05.131</p>	<p>10 mm <b>05.113</b> 12 mm <b>05.133</b></p>	

# Centre locks and strike boxes

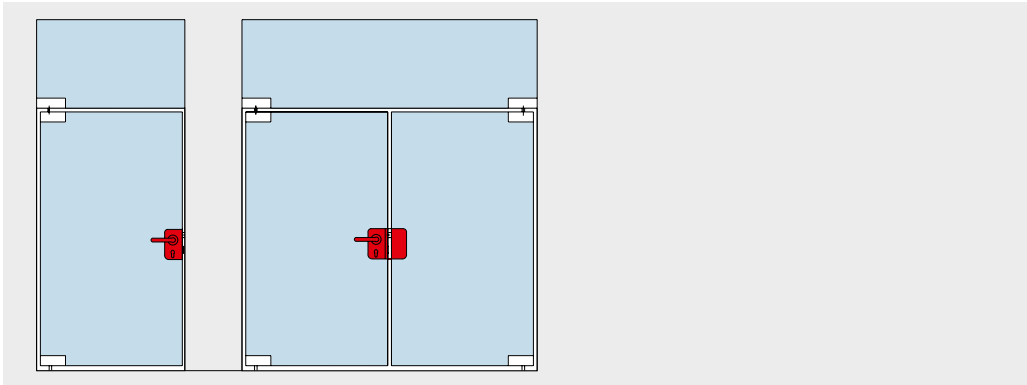Complete, for 10 mm glass thickness



Centre locks and strike boxes with drilled holes glass preparation

	Product description	Art. No.
	not available in Aluminum mill finish (100)	
	<p><b>Centre lock</b> for double-action door, prepared for Europrofile cylinder, double throw</p>	<p><b>*11.216/11.217</b></p>
	<p>Weight in kg: Aluminum 1.070</p> <p>Prepared for KABA</p> <p>Weight in kg: Aluminum 1.063</p>	<p><b>*11.250/11.251</b> not illustr.</p>
<p><b>Strike box</b> to suit centre locks for: Art. No. 11.216, 11.217, Art. No. 11.250, 11.251</p> <p>Weight in kg: Aluminum 0.965</p>	<p><b>*11.218/11.219</b></p>	

\* Left / right hand (illustration shows left hand) are determined by view from hanging side.

	<b>Product description</b>	<b>Art. No.</b>
	<p><b>Centre lock</b> for single-action door (with free glass edge), prepared for Europrofile cylinder, double throw</p> <p>Weight in kg: Aluminum 1.060</p> <p>Prepared for KABA</p> <p>Weight in kg: Aluminum 1.053</p>	<p><b>*11.220/11.221</b></p> <p><b>*11.252/11.253</b> not illustr.</p>
	<p><b>Strike box</b> to suit centre locks for: Art. No. 11.220, 11.221, Art. No. 11.252, 11.253</p> <p>Weight in kg: Aluminum 0.980</p>	<p><b>*11.222/11.223</b></p>
	<p><b>Centre lock</b> for single-action door (with free glass edge), with both latch and lock bolt, prepared for lever on round rose inside, smooth blanking plate outside, prepared for Europrofile cylinder, double throw</p> <p>Weight in kg: Aluminum 1.175</p> <p>Prepared for KABA</p> <p>Weight in kg: Aluminum 1.168</p>	<p><b>*11.224/11.225</b></p> <p><b>*11.254/11.255</b> not illustr.</p>
	<p><b>Strike box</b> to suit centre locks for: Art. No. 11.224, 11.225 Art. No. 11.254, 11.255</p> <p>Weight in kg: Aluminum 0.945</p>	<p><b>*11.203/12.207</b></p>
	<p><b>Lever handle, for inside</b> to suit centre locks for: Art. No. 11.224, 11.225, Art. No. 11.254, 11.255</p> <p>Weight in kg: Aluminum 0.195</p>	<p><b>11.226</b></p>
	<p><b>If used on glass doors in rebated frames, a minimum of 26–28 mm frame depth is needed.</b></p>	<p>*Left / right hand (illustration shows left hand) are determined by view from hanging side.</p>


		Product description	Art. No.
		<p><b>Centre lock,</b> with lockable latch, nightlatch function (suitable for aluminum lever handles with round roses), prepared for Europrofile cylinder</p> <p>Weight in kg: Aluminum 1.350</p>	<b>*05.210/05.211</b>
		<p><b>Strike box</b> to suit centre locks (nightlatch function) for Art. No. 05.210/05.211</p> <p>Weight in kg: Aluminum 0.900</p>	<b>*05.212/05.213</b>
		<p><b>Hook lock</b> for sliding doors, nightlatch function, suitable for <b>aluminum lever handles with round roses</b> (10.307), prepared for Europrofile cylinder, left hand and right hand, with lock keeper plate</p> <p>Weight in kg: Aluminum 1.325</p>	<b>05.200</b>
		<p><b>Suitable for lever handles with follower</b></p> <p>Weight in kg: Aluminum 1.325</p> <p><b>Strike box</b> to suit hook lock, (05.200, 05.202), non-handed</p> <p>Weight in kg: Aluminum 0.890</p>	<b>05.202</b>  <b>05.201</b>

\* Left / right hand (illustration shows left hand) are determined by view from hanging side.





# Locks and strike boxes with electric strike release

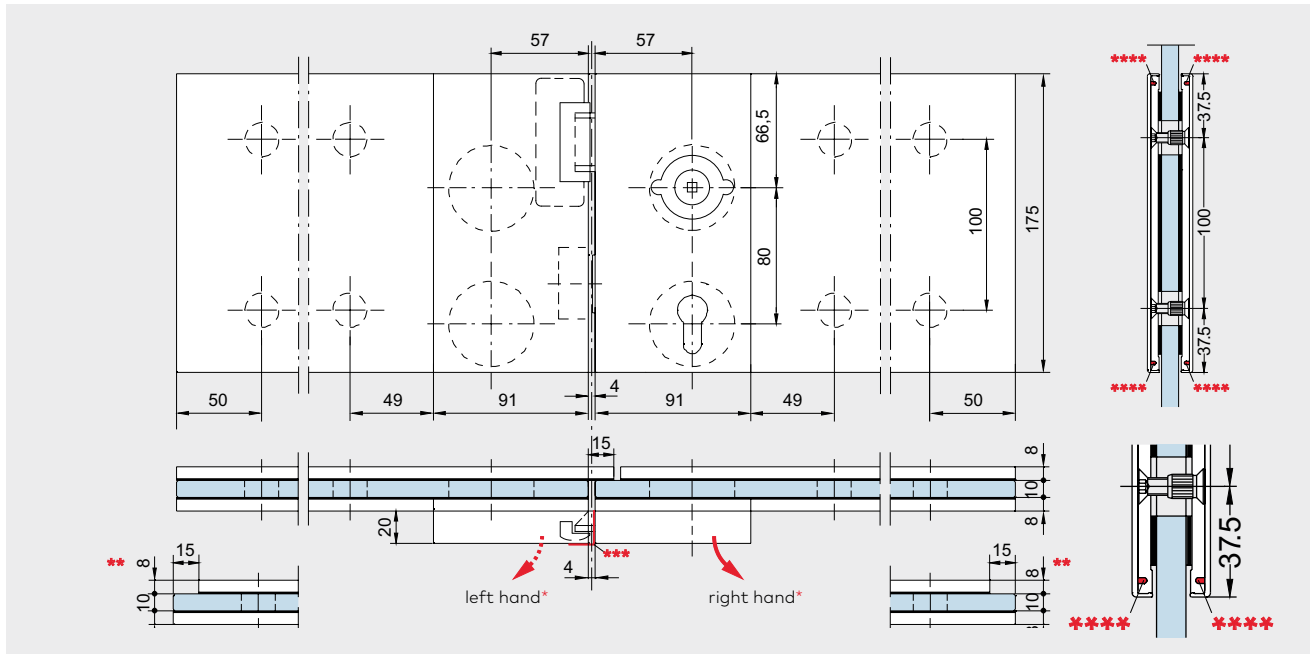for 10 mm glass thickness



Product description	Art. No.	Product description	Art. No.
<b>Strike box,</b> complete with midrail, <b>with electric strike release</b> (Standard: Fail secure function, 6 to 12 V –/–, with mechanical unlock. Further types on request.) To suit centre lock with midrail for Art. No. 05.220/05.221 Art. No. 05.232/05.233 Art. No. 05.256/05.257  Midrail 800 – 1,200 mm	*05.222/05.223	<b>Centre lock</b> complete with midrail, with latch and lock bolt, for inward opening single-action doors, prepared for lever on round rose inside, smooth blanking plate outside, pre- pared for Europrofile cylinder  Midrail 800 – 1,200 mm  Weight in kg/m: Aluminum 7.018  Midrail up to 799 mm  prepared for KABA Midrail 800 – 1,200 mm  Weight in kg/m: Aluminum 7.011  Midrail up to 799 mm	*05.220/05.221            *05.232/05.233            *05.256/05.257 not illustr.
Weight in kg/m: Aluminum 6.523  Midrail up to 799 mm	*05.234/05.235	*05.236/05.237	
<b>Aluminum midrail</b> for sidepanels, length up to 6,000 mm  Weight in kg/m: Aluminum 5.928	05.230		

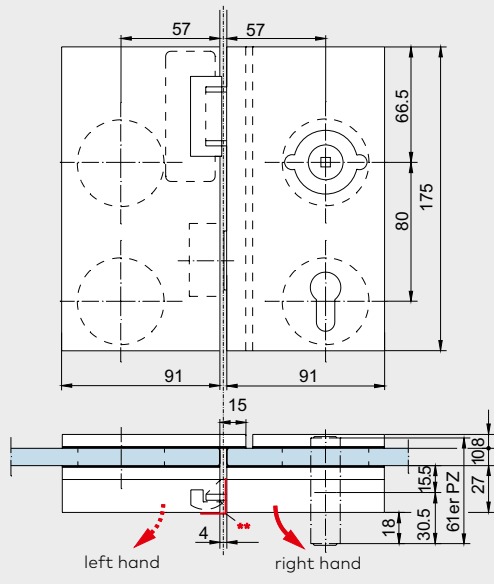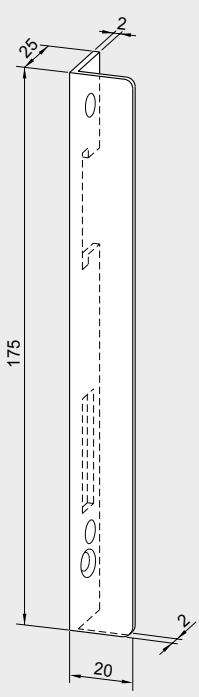\* Left / right hand are determined by view from hanging side.  
 \*\* All centre locks and strike boxes with midrail are also available with  
 free glass edge (when using fixed glass elements without end caps).  
**Please give details with order.**  
 \*\*\* Angel bracket (05.218/05.219) for door opening outwards (optional)  
 \*\*\*\* Recess for electric strike release cable

	Product description	Art. No.
	<p><b>Centre lock</b> with latch and lock bolt, for inward opening single-action doors, prepared for lever on round rose inside, smooth blanking plate outside, prepared for Europrofile cylinder</p> <p>Weight in kg: Aluminum 1.090</p> <p>Prepared for KABA</p> <p>Weight in kg: Aluminum 1.083</p> <p><b>Suitable lever handle</b> see page 199</p> <p><b>Centre lock</b> with latch and lock bolt, for inward opening single-action doors, prepared for rose lever on both sides, prepared for Europrofile cylinder</p> <p>Weight in kg: Aluminum 1.090</p> <p><b>Strike box,</b> to suit centre lock with latch and lock bolt, <b>with electric strike release</b> (Standard: fail secure function, 6 to 12 V -/-, with mechanical unlock. Further types on request.) (for Art. No. 05.224, 05.225, 05.258, 05.259)</p> <p>Weight in kg: Aluminum 0.595</p>	<p><b>*05.224/05.225</b></p> <p><b>*05.258/05.259</b> not illustr.</p> <p><b>11.226</b></p> <p><b>*05.228/05.229</b></p> <p><b>*05.226/05.227</b></p>
 <p>LH/ISO 6 door illustrated.</p>	<p><b>Angle bracket</b> for centre locks (opening to outside)</p> <p>Weight in kg: 0.040</p>	<p><b>*05.218/05.219</b></p>

\* Left / right hand are determined by view from hanging side.

\*\* Angle bracket (05.218/05.219) for door opening outwards (optional)

# Space for your notes

# Locks with panic function, opening to outside

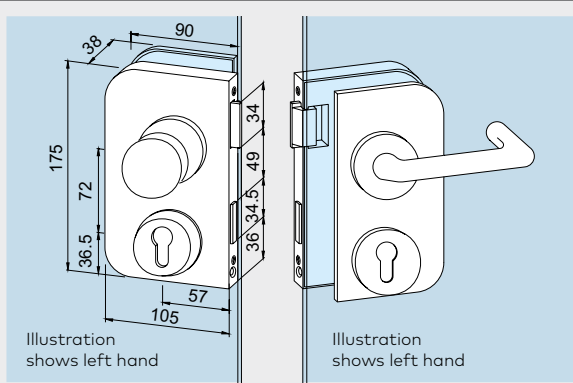
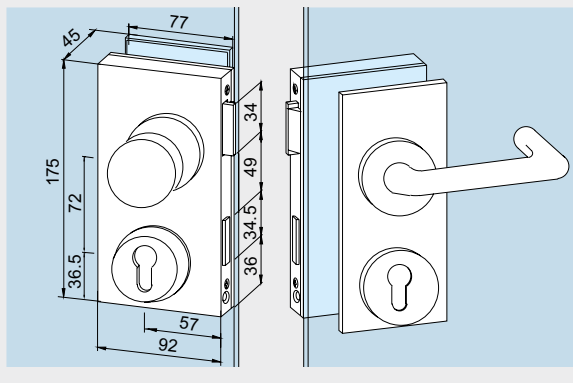
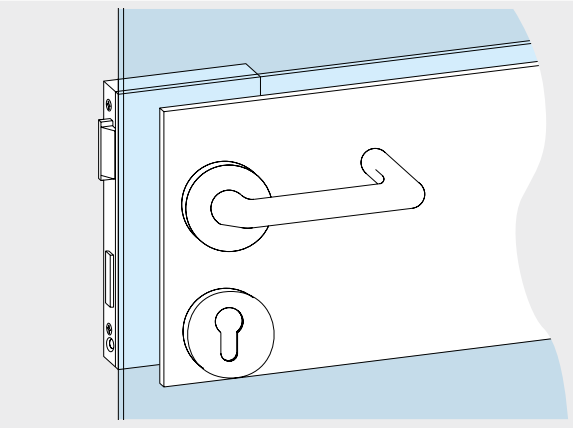
## for 10 mm glass thickness

**Operation outside:** Bolt is unlocked by turn of key, and latch is withdrawn by follower.

**Operation inside:** Lock can be operated by rose lever handle even when bolt is locked.

Not for emergency exit doors according to German Standard DIN EN 179 or DIN EN 1125 (corresponding modifications in preparation)

For best protection against burglary we recommend the use of the angle bracket (05.218/05.219)

	Product description	Art. No.
 <p>Illustration shows left hand</p>	<p><b>Centre lock</b> with both latch and lock bolt, <b>rose lever on inside</b> and fixed knob (without function) on outside. Prepared for Europrofile cylinder with roses</p> <p><b>Weight in kg:</b> Aluminum 1.706</p> <p>Please use strike box 11.206/11.207.</p>	<p><b>*05.240/05.241</b></p>
 <p>Illustration shows left hand</p>	<p><b>For strike boxes with electric strike release</b></p> <p><b>Centre lock</b> with both latch and lock bolt, with angled cover, for door opening outwards (not shown), <b>rose lever on inside</b> and fixed knob (without function) on outside. Prepared for Europrofile cylinder with roses. Lockable into strike boxes with electric strike release for Art. No. 05.226/05.227</p> <p><b>Weight in kg:</b> Aluminum 2.900</p>	<p><b>*05.244/05.245</b></p>
	<p><b>Centre lock</b> complete with midrail, with latch and lock bolt, with angled cover, for door opening outwards (not shown), rose lever on inside and fixed knob (without function) on outside. Prepared for Europrofile cylinder with roses. Lockable into strike boxes with electric strike release for Art. No. 05.222/05.223, for Art. No. 05.234/05.235</p> <p>Midrail 800 – 1,200 mm</p> <p><b>Weight in kg/m:</b> Aluminum 7.500</p> <p>Midrail up to 799 mm</p>	<p><b>*05.246/05.247</b></p> <p><b>*05.248/05.249</b></p>

\* Left / right hand are determined by view from hanging side.

Additional exit devices for glass doors with panic function covered by approval certification can be found in the technical documentation of PHA 2000 and Exit Pad



# Self-locking panic locks, opening to outside
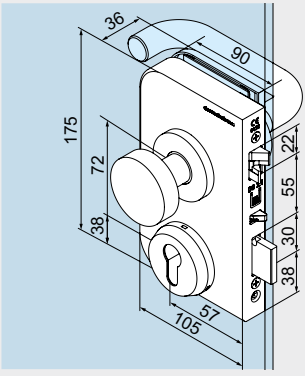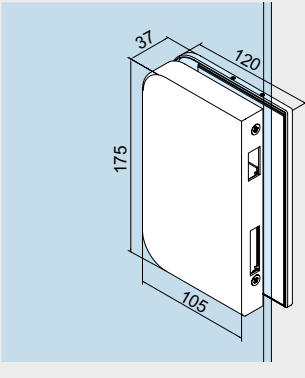
## for 10 mm glass thickness

**Operation outside:** Bolt is unlocked by turn of key, and latch is withdrawn by follower.

**Operation inside:** Lock can be operated by rose lever handle even when bolt is locked.

For emergency exit doors according to German Standard DIN EN 179.

	Product description	Art. No.
	<p><b>Centre lock OFFICE Junior SVP 5000</b> with both latch, lock bolt self-locking function <b>rose lever on inside</b> and fixed knob (without function) on outside. Prepared for Europrofile cylinder with roses</p> <p><b>Weight in kg:</b> Aluminum 1.706</p>	<b>*05.250/05.251</b>
	<p><b>Strike box for self-locking panic lock 05.250/05.251</b></p> <p>Weight in kg: Aluminum 1.486</p>	<b>*05.252/05.253</b>


**Please note:**

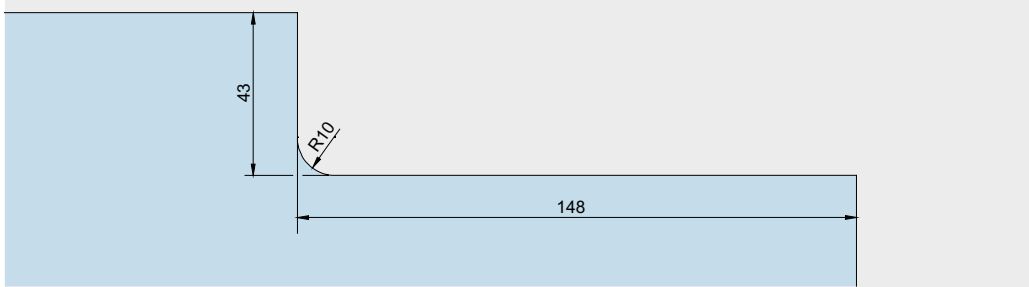For frame applications with 8 mm TSG a rebate depth of min. 26 mm required. With 10 mm TSG, a fold depth of at least 28 mm required.

\*Left / right hand are determined by view from hanging side.

Additional exit devices for glass doors with panic function covered by approval certification can be found in the technical documentation of PHA 2000 and Exit Pad


# Glass preparation locks



**US 10**

Corner locks  
 Art. No. 03.206,  
 03.285, 03.287,  
 03.288, 03.340

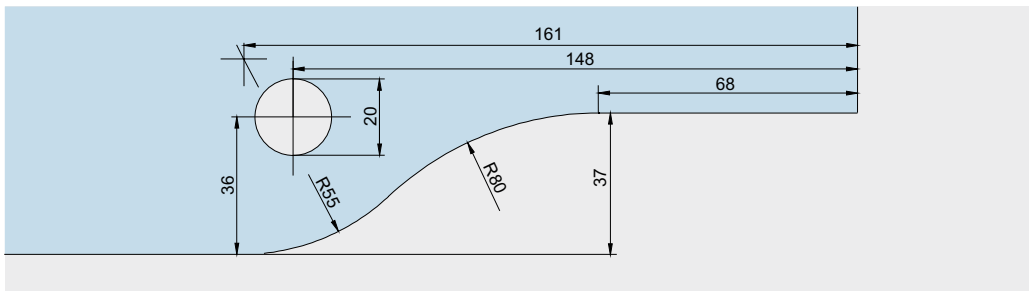
**Scale 1 : 2**



**GK 30 (PT 30)**

Single overpanel  
 strike box  
 Art. No. 03.230,  
 03.234, 03.235

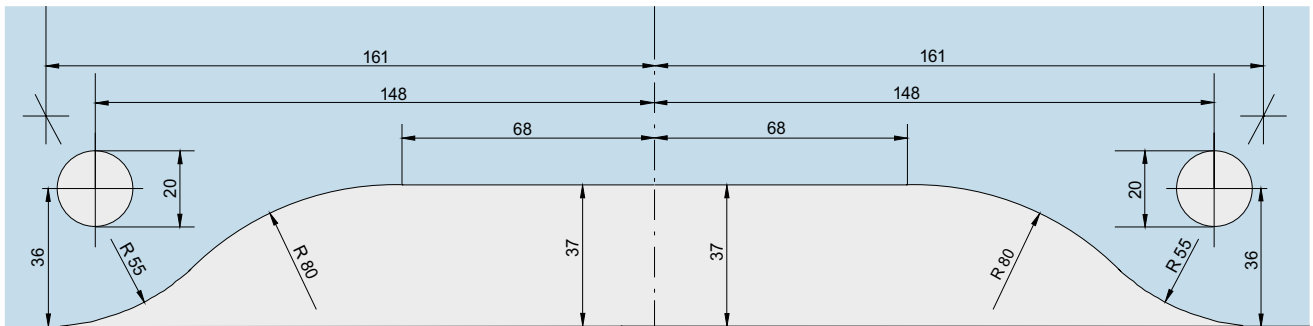
**Scale 1 : 2**



**GK 20**

Double overpanel  
 strike box  
 Art. No. 03.245,  
 03.246, 03.247

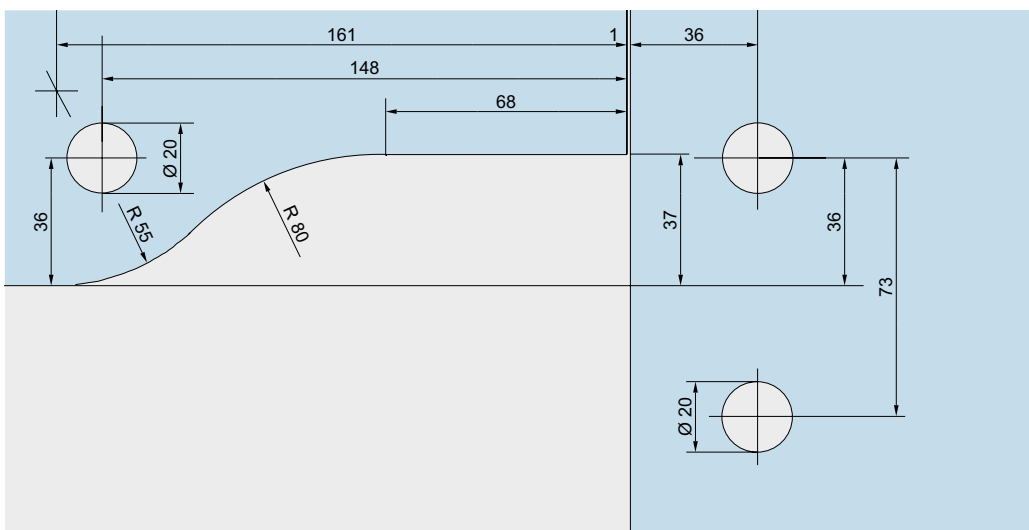
**Scale 1 : 2**



**GK 40 (PT 40)**

Corner overpanel  
 strike box  
 Art. No. 03.250,  
 03.254, 03.255

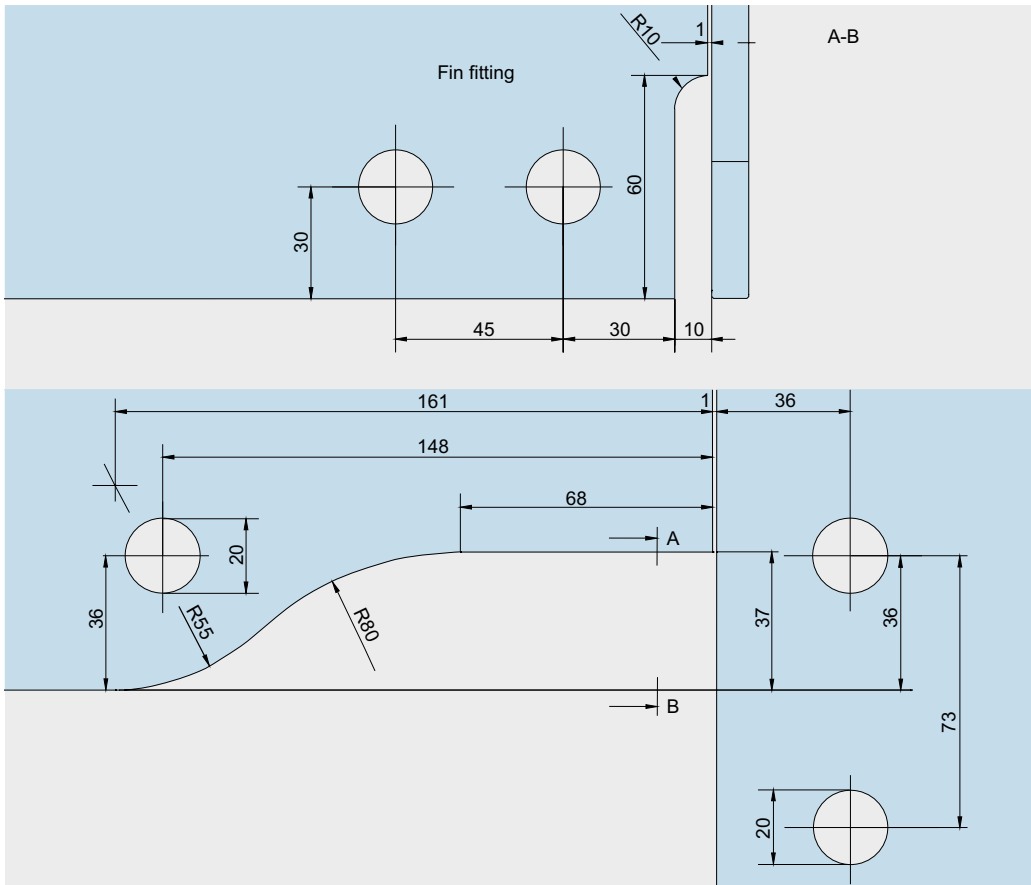
**Scale 1 : 2**



**GK 41**

Strike box with fin fitting inside  
Art. No. 03.193, 03.194

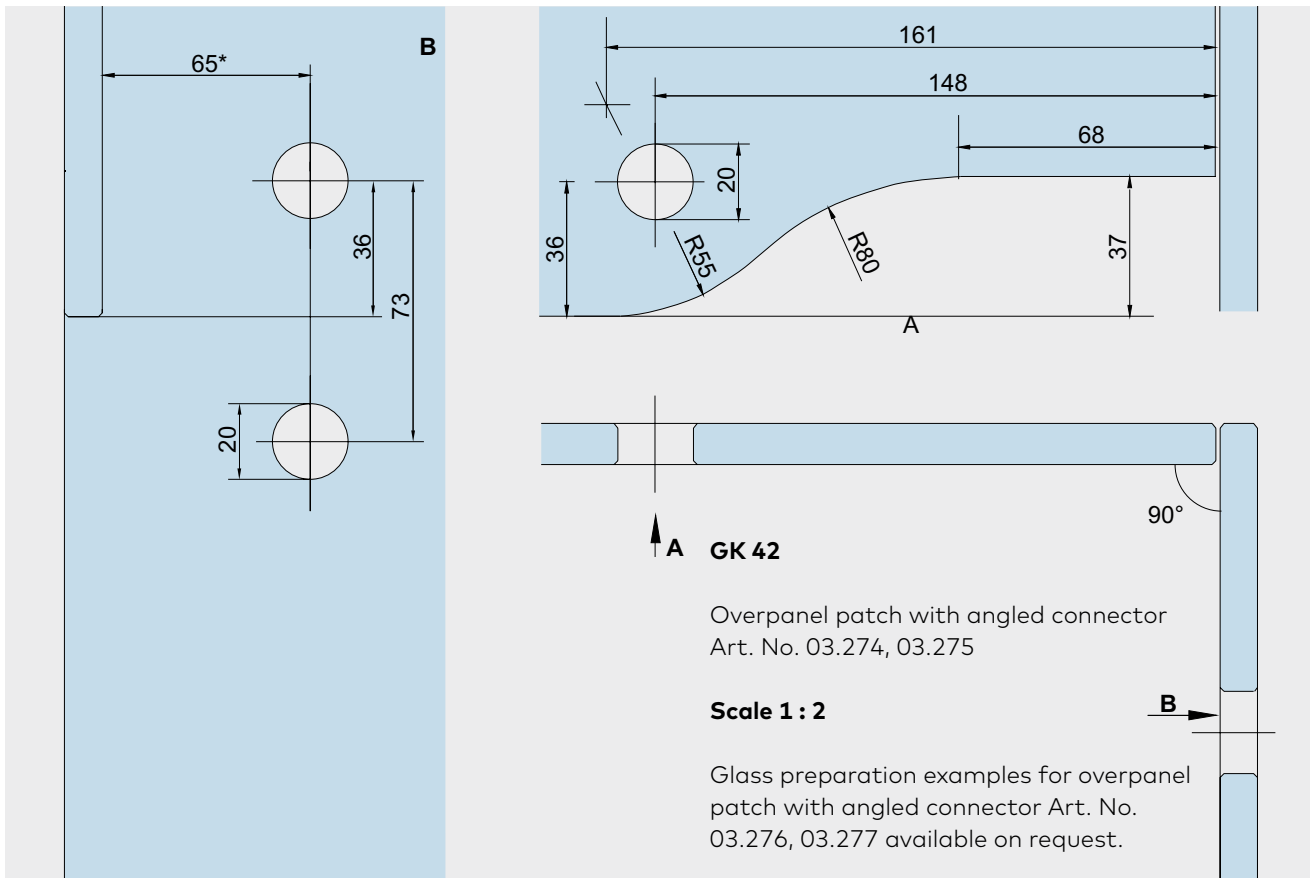**Scale 1 : 2**




**GK 42**

Overpanel patch with angled connector  
Art. No. 03.274, 03.275

**Scale 1 : 2**

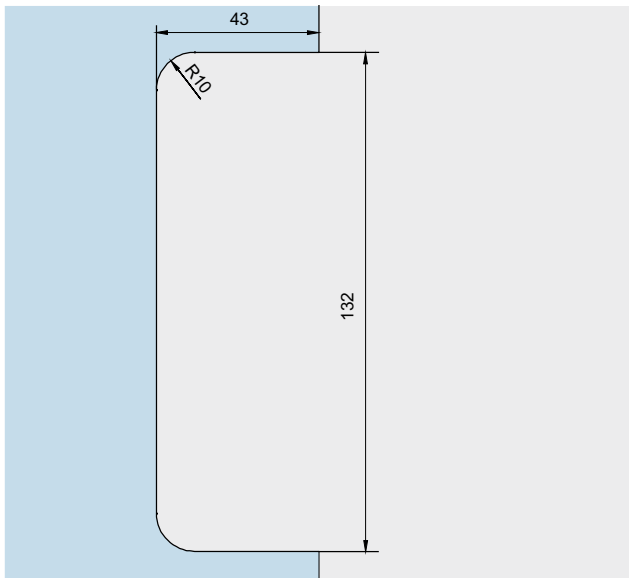Glass preparation examples for overpanel patch with angled connector Art. No. 03.276, 03.277 available on request.




**US 20, GK 50**

Centre lock  
 Art. No. 03.215, 03.289, 03.290, 03.345  
 and strike box for centre lock  
 Art. No. 03.224

**Scale 1 : 2**

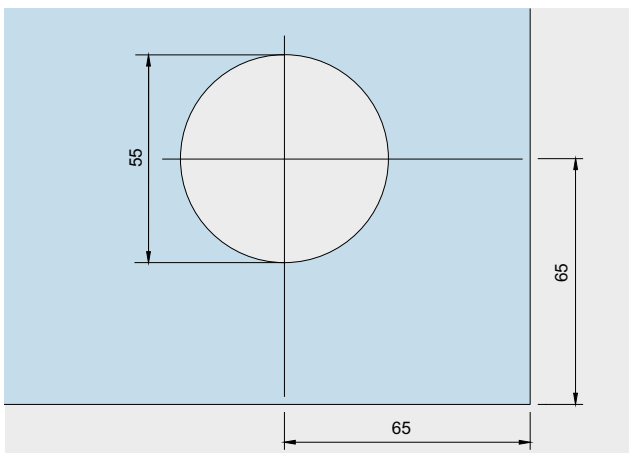
**Glass preparation for corner, centre locks and strike boxes, requiring drilled holes**



**Corner locks**

Art. No. 05.100, 05.103, 05.105, 05.116,  
 05.117, 05.118, 05.119

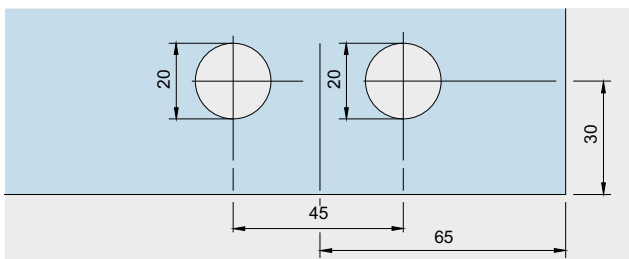
**Scale 1 : 2**



**Strike boxes**

Art. No. 05.108, 05.109

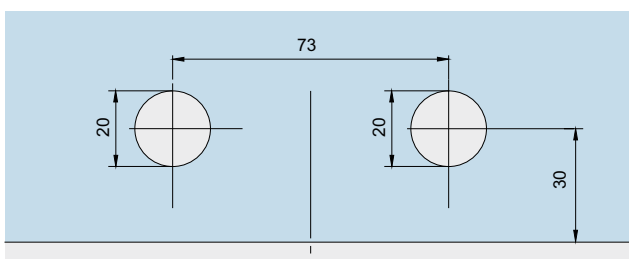**Scale 1 : 2**




**Strike boxes**

Art. No. 05.110, 05.111

**Scale 1 : 2**


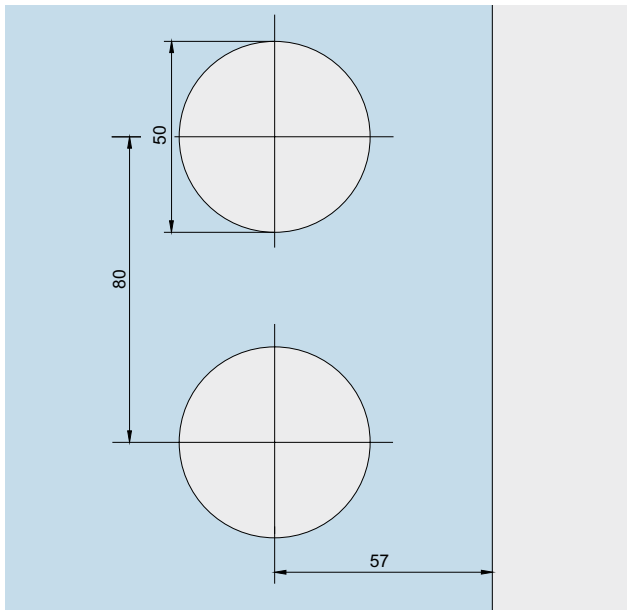
## Glass preparation for centre locks and strike boxes, requiring drilled holes




### Centre locks

Art. No. 05.250, 05.251, 11.216, 11.217, 11.220, 11.221, 11.224, 11.225, 11.250, 11.251, 11.252, 11.253, 11.254, 11.255

### Strike boxes for centre locks

Art. No. 05.252, 05.253, 11.206, 11.207, 11.218, 11.219, 11.222, 11.223

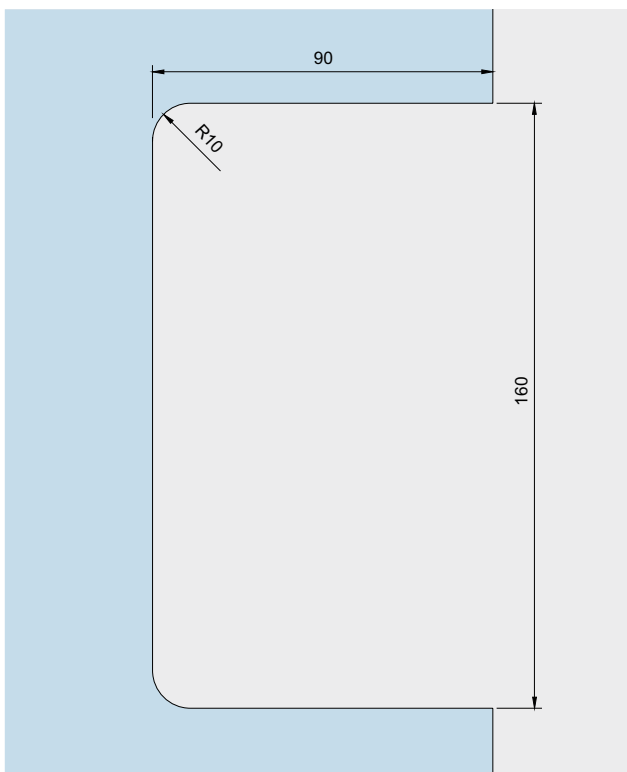
**Scale 1 : 2**



### Centre locks with nightlatch function, hook bolts and strike boxes

Art. No. 05.200, 05.201, 05.202, 05.210, 05.211, 05.212, 05.213

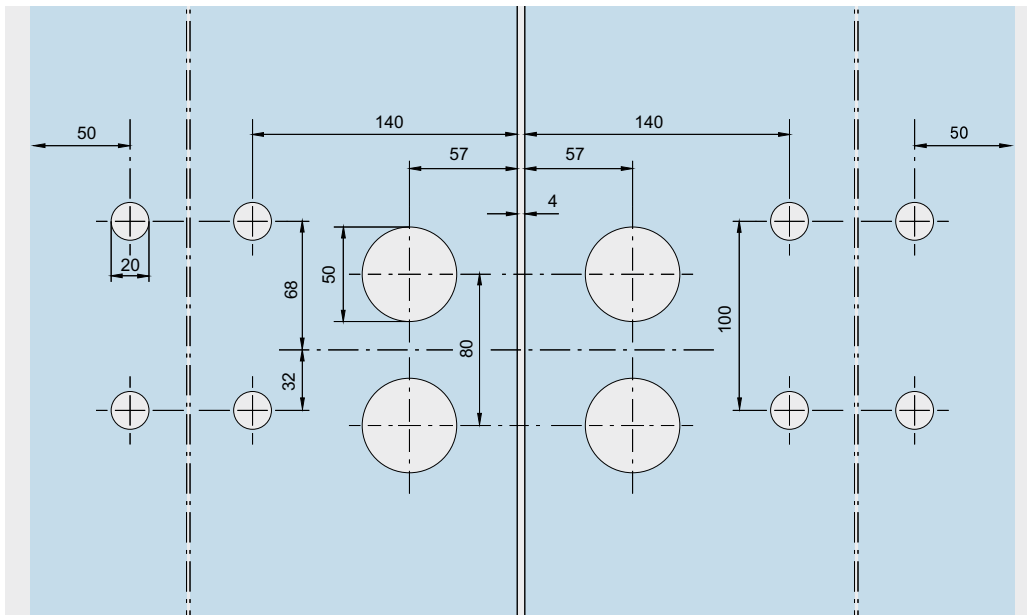
**Scale 1 : 2**



**Centre locks and strike boxes with midrails**

Art. No. 05.220, 05.221, 05.222, 05.223, 05.246, 05.247, 05.256, 05.257

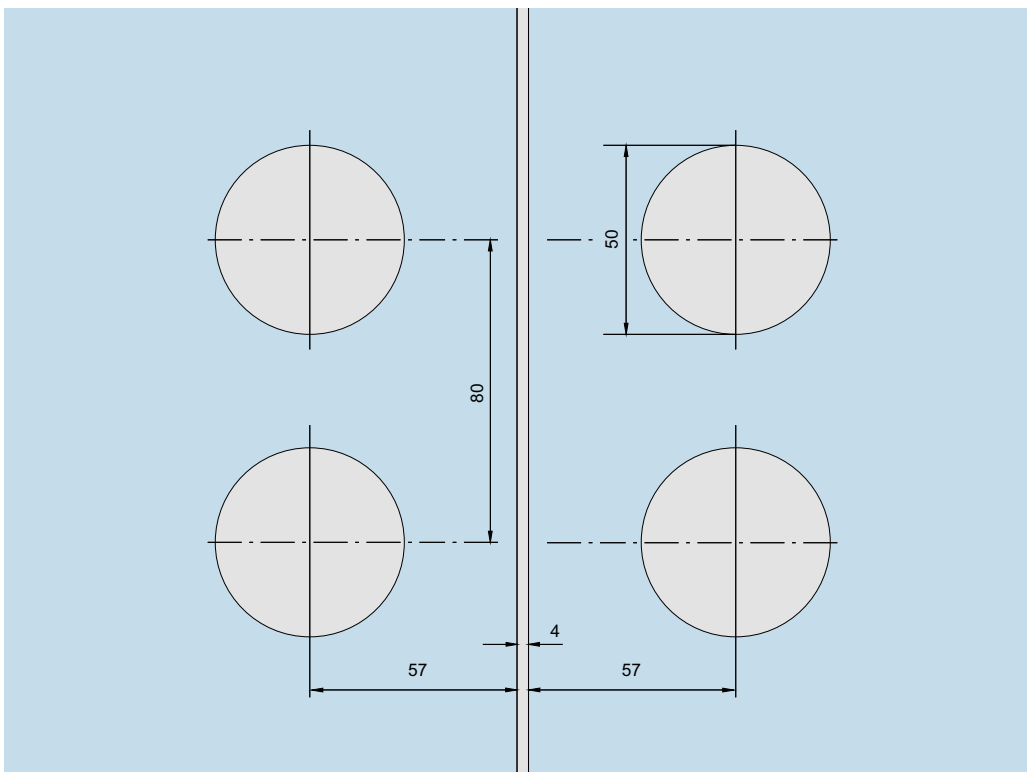**Scale 1 : 4**



**Centre locks with latch and lock bolts, and strike boxes**

Art. No. 05.224, 05.225, 05.226, 05.227, 05.240, 05.241, 05.244, 05.245, 05.250, 05.251, 05.252, 05.253, 05.258, 05.259

**Scale 1 : 2**

# Space for your notes

# Content

## Wall connection profile

214	<b>General information</b>
215	<b>Components</b>
224	<b>Accessories</b>
248	<b>Safety-related information</b>



## Wall connection profile

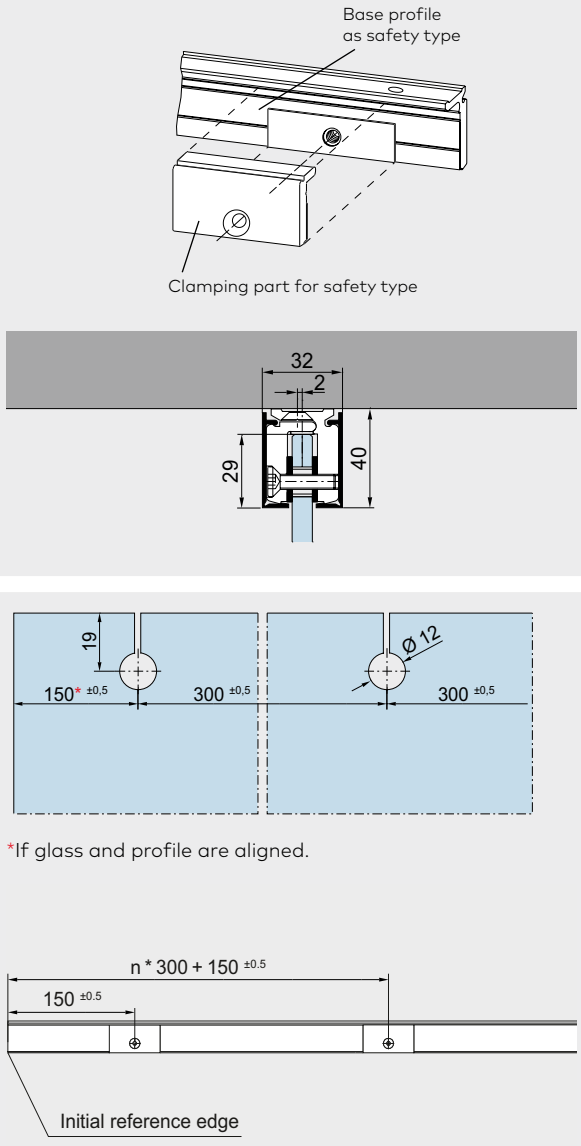
# Wall connection profiles






Consisting of: base profile, with bore holes (every 300 mm), incl. clamping parts with screws and gasket strips.

**Application:**

e. g. all around frame system for toughened glass assemblies, with fittings on sides and ceiling. The safety type prevents free hanging glass elements from falling down, by fixing the clamping fitting through glass holes. 15 kg load for each clamping part, torque for fixing screws 15 Nm (M 6 = Allan key size 4).

	Product description	Glass thickness	Art. No.	
	<b>Base profile</b> 6,000 mm Stock length	8 mm	<b>07.042</b>	
		10 mm	<b>07.001</b>	
		12 mm	<b>07.002</b>	
		12.7 mm	<b>07.045</b>	
		13.5 mm	<b>07.046</b>	
		15 mm	<b>07.047</b>	
		17 mm	<b>07.048</b>	
		19 mm	<b>07.049</b>	
		<b>Fixed length</b>	8 mm	<b>07.050</b>
			10 mm	<b>07.051</b>
			12 mm	<b>07.052</b>
			12.7 mm	<b>07.055</b>
			13.5 mm	<b>07.056</b>
			15 mm	<b>07.057</b>
			17 mm	<b>07.058</b>
			19 mm	<b>07.059</b>
		<b>Clamping part (addition/replacement)</b> 60 mm long, with screws and gasket strips	8 mm	<b>07.043</b>
			10 mm	<b>07.004</b>
			12 mm	<b>07.005</b>
			12.7 mm	<b>07.085</b>
		13.5 mm	<b>07.086</b>	
		15 mm	<b>07.087</b>	
		17 mm	<b>07.088</b>	
		19 mm	<b>07.089</b>	

Safety type	Product description	Glass thickness	Art. No.	
	<p><b>Base profile as safety type</b>  <b>6,000 mm Stock length</b></p>	<p>8 mm                      10 mm</p>	<p><b>07.060</b>  <b>07.061</b></p>	
	<p><b>Fixed length</b></p>	<p>8 mm                      10 mm</p>	<p><b>07.066</b>  <b>07.067</b></p>	
	<p>Weight in kg/m:                      Aluminum 1.200</p>			
	<p><b>Clamping part (addition/replacement) for Safety type</b>                      60 mm long,                      with screws and gasket strips</p>	<p>8 mm                      10 mm</p>	<p><b>07.063</b>  <b>07.064</b></p>	
	<p><b>Glass preparation for Safety type</b></p>			

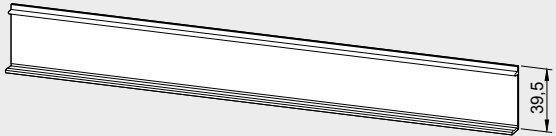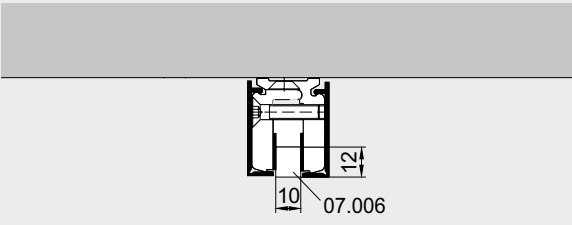	Product description	Glass thickness	Art. No.
	<p><b>Clip on cover profile</b> brass, stainless steel, satin and stainless steel polished door available</p> <p>Weight in kg/m: Aluminum 0.216 Stainless steel 0.366</p> <p>6,000 mm stock length fixed length</p>		<p><b>07.003</b> <b>07.053</b></p>
	<p><b>End cap</b></p> <p>Weight in kg/pc: Aluminum 0.003 Brass 0.090 Stainless steel 0.090</p> <p>Aluminum 0.003 Brass 0.010 Stainless steel 0.010</p> <p>Aluminum 0.003 Brass 0.011 Stainless steel 0.012</p>	<p>8 mm and 10 mm</p> <p>12–13.5 mm</p> <p>15–19 mm</p>	<p><b>07.007</b></p> <p><b>07.044</b></p> <p><b>07.065</b></p>
	<p><b>Filler block, 10 x 12 mm</b></p> <p>6,000 mm stock length fixed length</p> <p>Weight in kg/m: Aluminum 0.325</p>		<p><b>07.006</b> <b>07.054</b></p>
	<p><b>U-profile</b> 20 x 20 x 20 x 2 mm</p> <p>6,000 mm stock length fixed length</p> <p>Weight in kg/m: Aluminum 0.304</p>		<p><b>07.092</b> <b>07.093</b></p>
	<p><b>U-profile</b> 30 x 20 x 30 x 2 mm</p> <p>6,000 mm stock length fixed length</p> <p>Weight in kg/m: Aluminum 0,304</p>		<p><b>07.097</b> <b>07.096</b></p>



# Space for your notes

# Content

## MR 22/MR 28

**220** **Components**

**224** **Accessories**

**248** **Safety-related information**



**MR 22/MR 28**

# Wall connecting frame system MR 22 and MR 28

Comprising a frame profile (series-drilled), a clamping profile and two contact rubber extrusions (PVC, grey).

These decorative and elegant frame solutions are characterised by their remarkably easy installation. The viewface width in the case of the MR 22 is a mere 22 mm and in the case of the MR 28 it is just 28 mm. Suitable for glass thicknesses of 8 and 10 mm. No load transfer by the profiles. Can be readily

removed and re-installed elsewhere. The MR 28 features an additional screw-fixing channel for connecting angle brackets and enables combination with mullion profiles for the vertical connection of several glass panels and also abutment to frame systems AT 44 and AT 50.

**Applications:**

e.g. surrounding frame for toughened glass systems for fixing to walls and ceilings



**MR 22**



max. glass dimensions:  
height: 2,500 mm  
width: 1,000 mm


**MR 28**

max. glass dimensions:  
height: 2,800 mm  
width: 1,000 mm

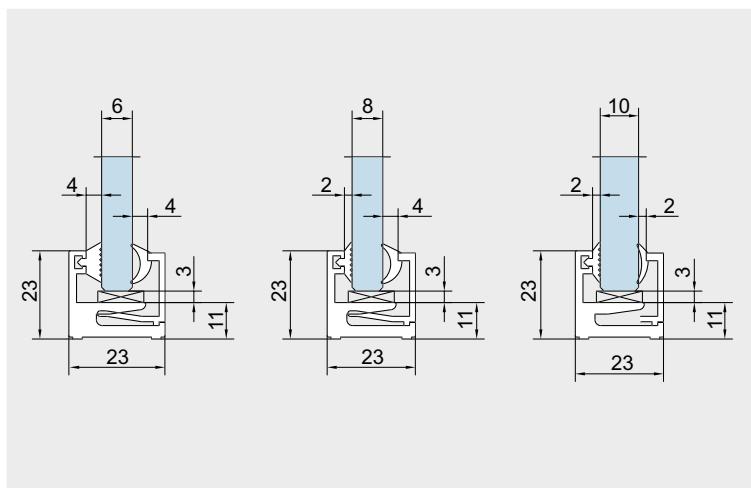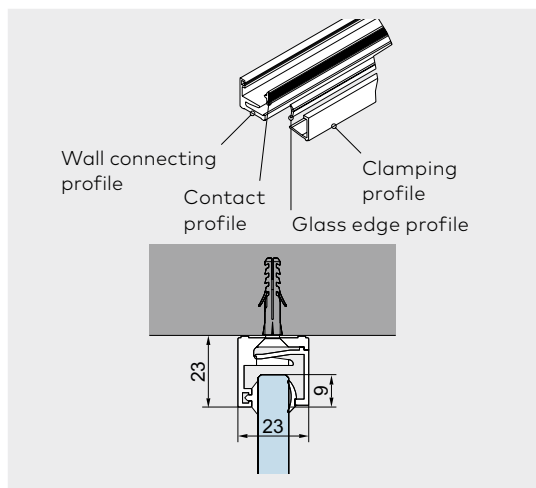
**Base profile MR 22**













	Features and data	Art. No.
	<b>MR 22</b> in 6,000 mm stock length, without PVC profile	<b>07.240</b>
	<b>Weight in kg/m:</b> Aluminum 0.648	
	<b>MR 22</b> in fixed length	<b>07.250</b>
	<b>Weight in kg/m:</b> Aluminum 0.648	





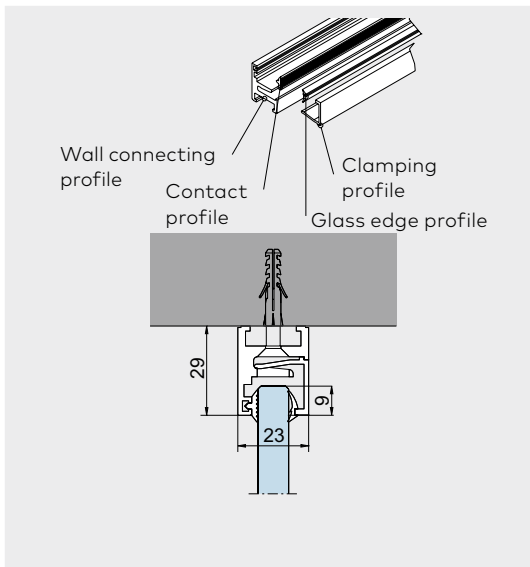
**Base profile MR 28****Attention:**

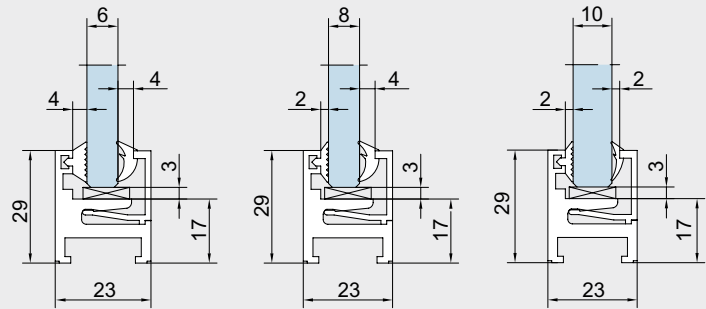Profiles are only delivered with straight cuts. Allowances in lengths of profiles to ensure producibility of bevel cuts have to be planned by the customer. The georgian bar profile must be prepared in addition on both sides. Please consider installation instruction

**Features and data****Art. No.**

	<p><b>MR 28</b> in 6,000 mm stock length, without PVC profile</p> <p><b>Weight in kg/m:</b> Aluminum 0.802</p>	<b>07.241</b>
	<p><b>MR 28</b> in fixed length</p> <p><b>Weight in kg/m:</b> Aluminum 0.802</p>	<b>07.251</b>
	<p><b>Georgian bar profile MR 28</b> in 6,000 mm stock length, without PVC profile</p> <p><b>Weight in kg/m:</b> Aluminum 0.542</p>	<b>07.242</b>
	<p><b>Georgian bar profile MR 28</b> in fixed length</p> <p>Screws for fixation at MR 28 base profile are not included in delivery. Recommendation: counter sunk screw 4.2 mm x 32 mm</p> <p><b>Weight in kg/m:</b> Aluminum 0.542</p>	<b>07.252</b>

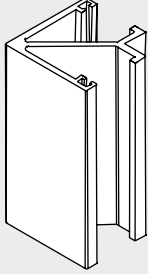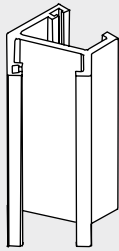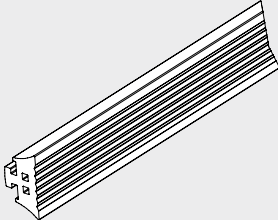	Product description	Art. No.
	<p><b>MR 28 georgian bar profile 90°</b> in 6,000 mm stock length</p> <p>Weight in kg/m: Aluminum 0.598</p>	<p><b>07.258</b></p>
	<p><b>MR 28 georgian bar profile 135°</b> in 6,000 mm stock length</p> <p>Weight in kg/m: Aluminum 0.466</p>	<p><b>07.259</b></p>
	<p><b>End mounted plate MR 22</b></p> <p>Weight in kg/pc: Aluminum 0.002</p>	<p><b>07.245</b></p>
	<p><b>End mounted plate MR 28</b></p> <p>Weight in kg/pc: Aluminum 0.002</p>	<p><b>07.246</b></p>
	<p><b>Contact profile</b> 2 mm thick, grey</p> <p>fixed length stock length 50 m</p> <p>Weight in kg/m: PVC 0.023</p>	<p><b>07.255</b> <b>07.265</b></p>
	<p><b>Contact profile</b> 4 mm thick, grey</p> <p>fixed length stock length 50 m</p> <p>Weight in kg/m: PVC 0.037</p>	<p><b>07.256</b> <b>07.266</b></p>

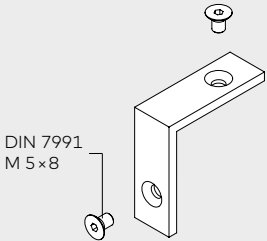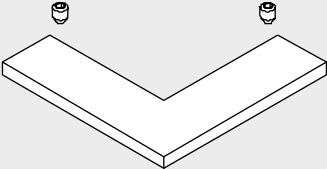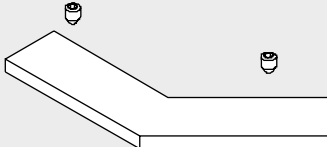	Product description	Art. No.
	<p><b>Glass wedge profile</b> 2 mm thick, grey</p> <p>fixed length stock length 50 m</p> <p>Weight in kg/m: PVC 0.016</p>	<p><b>07.253</b> <b>07.263</b></p>
	<p><b>Glass wedge profile</b> 4 mm thick, grey</p> <p>fixed length stock length 25 m</p> <p>Weight in kg/m: PVC 0.034</p>	<p><b>07.254</b> <b>07.264</b></p>
	<p><b>Corner connection set MR 28,</b> 4 pieces per set</p> <p>8 screws DIN 7991 M 5 x 8 included in scope of delivery</p> <p>Weight in kg/pc: Aluminum 0.0021</p>	<p><b>07.247</b></p>
	<p><b>Corner connection for MR 28</b> <b>georgian bar profil 90°</b></p> <p>2 grub screws DIN 916 M 4 x 5 included in scope of delivery</p>	<p><b>07.248</b></p>
	<p><b>Corner connection for MR 28</b> <b>georgian bar profil 135°</b></p> <p>2 grub screws DIN 916 M 4 x 5 included in scope of delivery</p>	<p><b>07.249</b></p>

# Content

## Accessories

227	<b>Top bearings, pivots</b>
229	<b>Floor bearings, lock keeper plate, floor sockets</b>
230	<b>Wall connection and cylinders</b>
232	<b>Gaskets</b>
234	<b>Clamping fittings</b>
236	<b>Accessories for door closer</b>
240	<b>Handle bars, door knobs, recessed pull grips</b>
248	<b>Safety-related information</b>





**Accessories**

## Perfection in detail

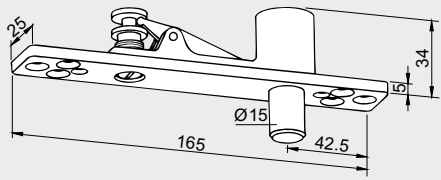
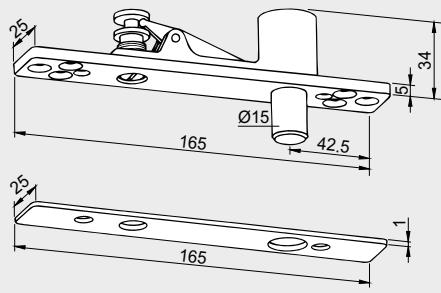
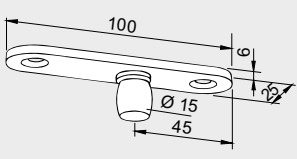
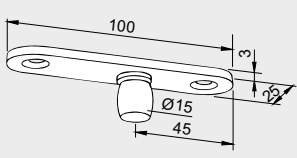
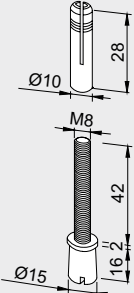

Original accessories for patch fittings, door rails and locks, matched to the dormakaba product range, are available.





They ideally complement the range of dormakaba hardware to optimise the technical excellence and cost effectiveness of toughened glass systems of all types.

Aside from functional components such as special floor pivots – including models for wet rooms – dormakaba also offers a choice of security-relevant options. Their installation further enhances the exceptional functional efficiency, reliability and long service life expected of dormakaba systems.







# Top bearing, pivots for UNIVERSAL, BEYOND, EA, TP/TA, MANET

**Advisory:** Please note that the upper pivots for UNIVERSAL and those for MUNDUS are not mutually compatible. The spigot diameters of the MUNDUS fittings vary.






	Product description	Art. No.
	<p><b>PT 21 frame portion top centre</b> with removable pin</p> <p>Weight in kg: 0.335</p> <p>15 mm Ø</p>	<p><b>01.117</b></p>
	<p><b>PT 21 frame portion top centre</b> with removable pin, with cover plate</p> <p>Weight in kg: 0.345</p> <p>15 mm Ø</p>	<p><b>01.118</b></p>
	<p><b>PT 24 pivot</b> with fixing plate, material thickness 6 mm, <b>to let into ceiling</b></p> <p>Weight in kg: 0.058</p> <p>Aluminum</p> <p>15 mm Ø</p>	<p><b>01.116</b></p>
	<p><b>PT 24 pivot</b> with fixing plate, material thickness 3 mm, <b>to screw on the ceiling</b></p> <p>Weight in kg: 0.042</p> <p>Aluminum 0.074</p> <p>15 mm Ø</p>	<p><b>01.123</b></p>
	<p><b>PT 25 pivot</b> with plug</p> <p>Weight in kg: 0.044</p> <p>15 mm Ø</p>	<p><b>01.115</b></p>
	<p><b>Loose pivot pin</b> for interface between patch and rail</p> <p>Weight in kg: 0.050</p>	<p><b>04.601</b></p>

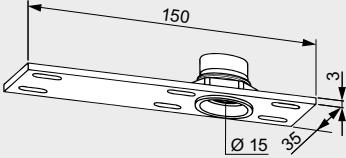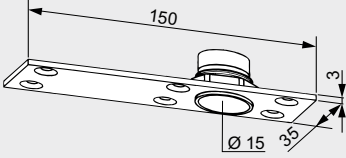	Product description	Art. No.
	<p><b>Top pivot bearing,</b> brass, nickel plated, for installation in frame or ceiling for 15 mm Ø pivot pin</p> <p>Weight in kg: 0.065</p>	<p><b>01.129</b></p>
	<p><b>Top pivot bearing</b> aluminum, for installation in frame or ceiling for 15 mm Ø pivot pin</p> <p>Weight in kg: 0.018</p>	<p><b>01.130</b></p>
	<p><b>Top pivot bearing</b> with steel fixing plate, for 15 mm Ø pivot pin</p> <p>Weight in kg: 0.160</p>	<p><b>01.131</b></p>
	<p><b>Top pivot bearing</b> with aluminum fixing plate, for 15 mm Ø pivot pin</p> <p>Weight in kg: 0.099</p>	<p><b>01.132</b></p>



# Floor bearing, lock keeper plate, floor socket for UNIVERSAL, BEYOND, EA, TP/TA, MANET

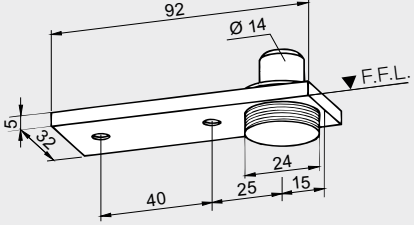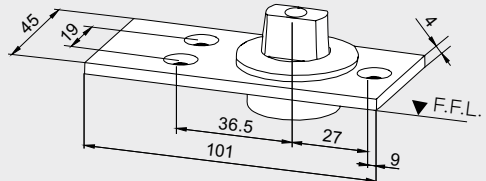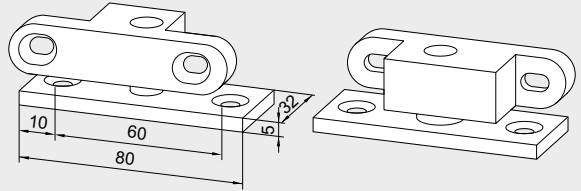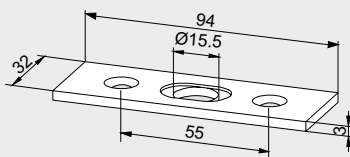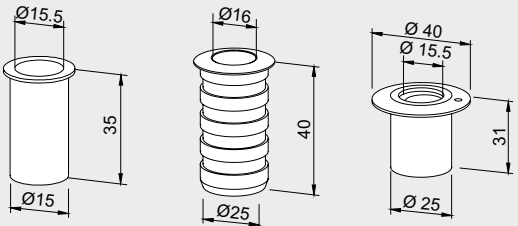	Product description	Art. No.
	<p><b>Floor pivot bearing</b> with round pivot 14 mm Ø, and cover plate; height adjustable by 5 mm max. door weight 100 kg</p> <p>Weight in kg: Aluminum 0.155 Brass 0.170 Stainless steel 0.169</p>	<p><b>01.106</b></p>
	<p><b>Floor pivot bearing</b> with round pivot 14 mm Ø and pin 24 mm Ø max. door weight 100 kg</p> <p>Weight in kg: 0.078</p>	<p><b>01.107</b></p>
	<p><b>Floor bearing</b> with profile spindle (longer spindle on request), max. door weight 200 kg</p> <p>Stainless steel, max. door weight 200 kg</p> <p>Weight in kg: 0.254</p>	<p><b>04.602</b>  <b>04.603</b></p>
	<p><b>Floor pivot bearing for damp environments,</b> with insert for UNIVERSAL PT 10 for mounting onto floor surface max. door weight 80 kg</p> <p>Weight in kg: 0.195</p>	<p><b>01.137</b></p>
	<p><b>Lock keeper plate,</b> stainless steel, two parts, adjustable ± 5 mm</p> <p>Weight in kg: 0.048</p>	<p><b>05.190</b></p>
	<p><b>Floor socket,</b> zinc coated brass for lock bolt</p> <p>Weight in kg: 0.020</p> <p><b>Floor socket,</b> aluminum, with spring and plastic stopper, dirt protection</p> <p>Weight in kg: 0.026</p> <p><b>Eccentric socket,</b> eccentric, zinc coated brass, with adjustable plastic socket insert</p> <p>Weight in kg: 0.020</p>	<p><b>05.192</b>  <b>05.193</b>  <b>05.194</b></p>

# Wall connection and cylinders for UNIVERSAL, BEYOND, EA, TP/TA, MANET

	Product description	Art. No.
	<p><b>Fixing plate</b> for overpanel patches from UNIVERSAL, EP and EA program</p> <p>Weight in kg: Aluminum 0.019 Brass 0.045</p> <p>Stainless steel not available, satin chrome on brass supplied.</p>	<b>01.127</b>
	<p><b>Wall anchor</b> for overpanel patches from UNIVERSAL, EP and EA program with thread M 8</p> <p>Weight in kg: 0.040</p>	<b>01.133</b>
	<p><b>Threaded rod</b> for overpanel patches from UNIVERSAL, EP and EA program M 8 with plug</p> <p>Weight in kg: 0.032</p>	<b>01.134</b>
	<p><b>Profile cylinder</b> length 61 mm, differently keyed, with DORMA Logo</p>	<b>05.001</b>
	<p><b>Profile cylinder</b> length 61 mm, equally keyed, with DORMA Logo</p>	<b>05.002</b>
	<p><b>Half-profile cylinder</b> length 31 mm, differently keyed, with DORMA Logo</p>	<b>05.003</b>
	<p><b>Half-profile cylinder</b> length 31 mm, equally keyed, with DORMA Logo</p>	<b>05.004</b>

# Profiles for UNIVERSAL

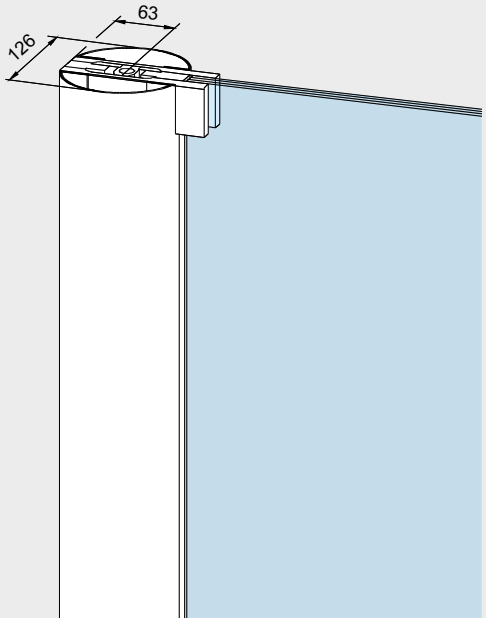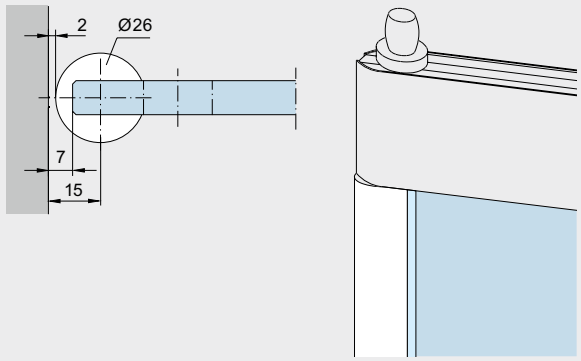	Product description	Art. No.
	<p><b>Aluminum round profile</b> for pinch free doors with 65 mm pivot point, consisting of 2 halves, prepared for UNIVERSAL fittings or door rails (76.5 mm or 100 mm).</p> <p>Please indicate:</p> <ul style="list-style-type: none"> <li>• Panel height (max. 2,500 mm, higher dim. on request)</li> <li>• Required preparation of the profile for top and bottom fittings</li> </ul> <p>Fixed length <span style="float: right;"><b>03.380</b></span>            Stock length 6,000 mm <span style="float: right;"><b>03.381</b></span>            Stock length 3,000 mm <span style="float: right;"><b>03.382</b></span></p> <p>Weight in kg/m:            Aluminum <span style="float: right;">4.744</span></p>	
	<p><b>Radiused edging strip</b> for fittings with 15 mm/18 mm pivot point. For pinch free doors, (strip is clamped onto free glass edge), Acrylic.</p> <p>Length: up to 4,500 mm <span style="float: right;"><b>01.230</b></span>            (specify height)            Length: 2,250 mm <span style="float: right;"><b>01.231</b></span></p> <p>Weight in kg/m: <span style="float: right;">0.408</span></p>	

# Gasket sets for UNIVERSAL

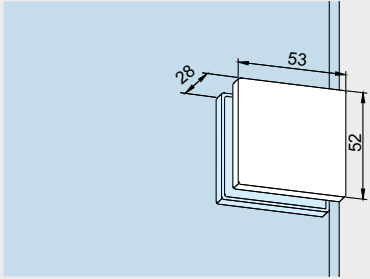
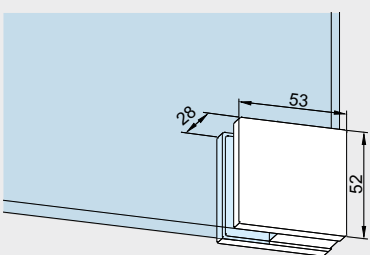
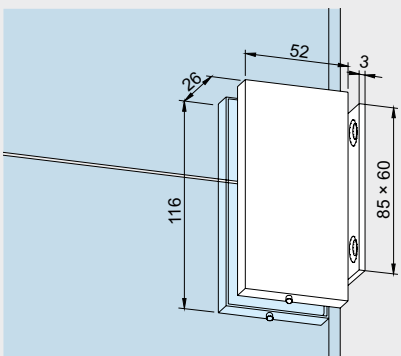
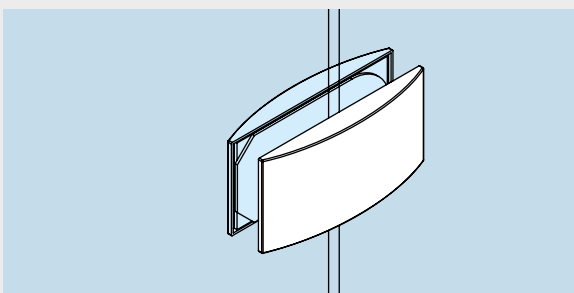
Product description	Art. No.	Product description	Art. No.
<b>Gasket sets for 12 mm glass thickness</b>		<b>Gasket sets for 8 mm glass thickness</b>	
for PT10/20/22/29/30/GK30	<b>03.900</b>	for PT10/20/22/29/30/GK30	<b>03.920</b>
for US 10/20/GK50	<b>03.901</b>	for US 10/20/GK50	<b>03.921</b>
for PT40/41/42/GK40/41/42	<b>03.902</b>	for PT40/41/42/GK40/41/42	<b>03.922</b>
for PT51	<b>03.903</b>	for PT51	<b>03.923</b>
for PT60/61/62	<b>03.904</b>	for PT60/61/62	<b>03.924</b>
for PT70/71	<b>03.905</b>	for PT70/71	<b>03.925</b>
for PT80/81	<b>03.906</b>	for PT80/81	<b>03.926</b>
for PT80 semi-high	<b>03.907</b>	for PT80 semi-high	<b>03.927</b>
for PT90/91	<b>03.908</b>	for PT90/91	<b>03.928</b>
for sidelight connector 01.153	<b>03.909</b>	for sidelight connector 01.153	<b>03.929</b>
for patch fitting 03.198	<b>03.910</b>	for patch fitting 03.198	<b>03.930</b>




**Note:** All fittings with a 15 mm pivot point are technically only designed for 8 mm glass thickness !




## Space for your notes

# Clamping fittings

	Product description	Art. No.
	<p><b>PT 90 Srew on fitting</b></p> <p>Weight in kg:                      Aluminum 0.120                      Brass 0.160                      Stainless steel 0.155</p>	<p><b>07.021</b></p>
	<p><b>PT 91 corner fitting</b></p> <p>Weight in kg:                      Aluminum 0.120                      Brass 0.160                      Stainless steel 0.155</p>	<p><b>07.023</b></p>
	<p><b>Side connector with fixing plate</b></p> <p>Weight in kg:                      Aluminum 0.313                      Stainless steel 0.376</p> <p>Also suitable for 12 mm glass thickness</p>	<p><b>01.153</b></p>
	<p><b>Overpanel-sidelight connector</b></p> <p>Weight in kg:                      Aluminum 0.146</p>	<p><b>12.536</b></p>

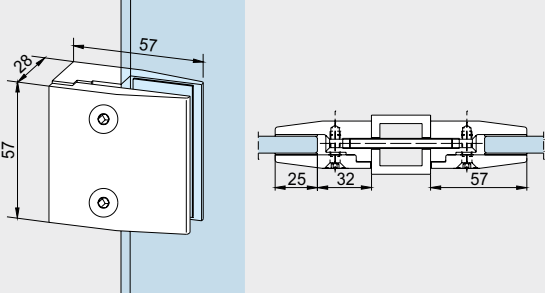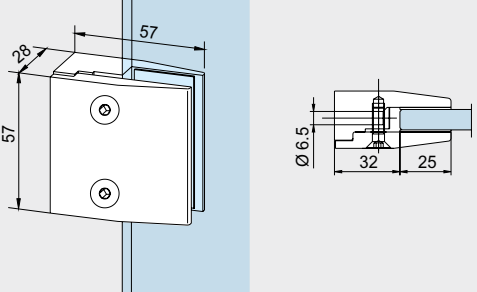	Product description	Glass thickness	Art. No.
	<b>Clamping fitting, right angle</b> with screw thread M 6	8 mm	<b>07.008</b>
		10 mm	<b>07.009</b>
	Weight in kg: Aluminum 0.185	12 mm	<b>07.010</b>
	Aluminum 0.181 Aluminum 0.180		
	<b>Threaded bolt</b> M 6 x 70 mm, zinc plated		<b>07.020</b>
Weight in kg: Aluminum 0.012			
	<b>Clamping fitting,</b> aluminum, with passage hole for M 6 thread	8 mm	<b>07.037</b>
		10 mm	<b>07.038</b>
	Weight in kg: Aluminum 0.180	12 mm	<b>07.039</b>


## Usage and assembly of fins

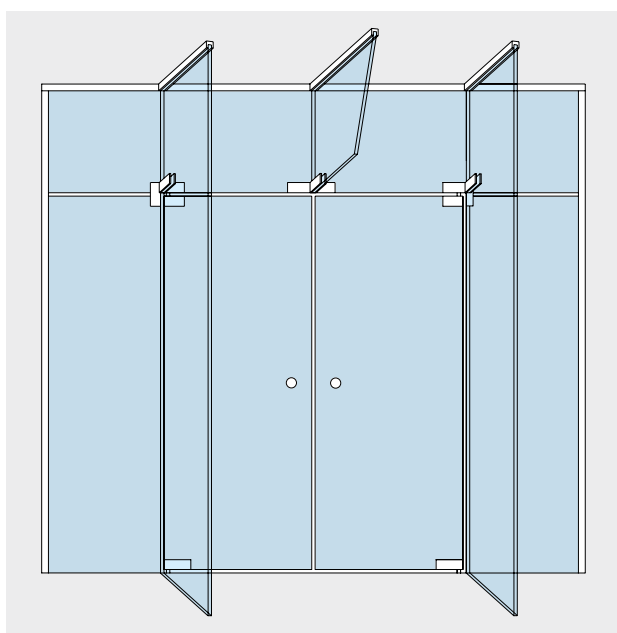

Fin fittings and corner connectors do not have a supporting structure. Overpanels, side-lights and fins have to be fixed securely to the ceiling by dormakaba wall connecting profiles or similar systems.

The need for stiffeners and the requisite glass thickness must be specified by a properly qualified structural engineer.


# Accessories for door closer TS 73 V

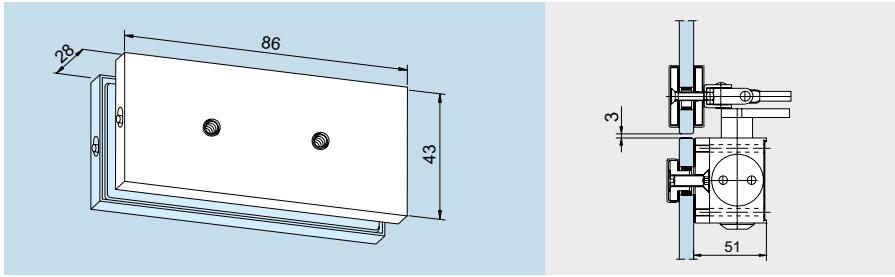


**Fixing plate**  
for DORMA TS 73 V,  
closer arm for overpanel

**Art. No. 12.330**

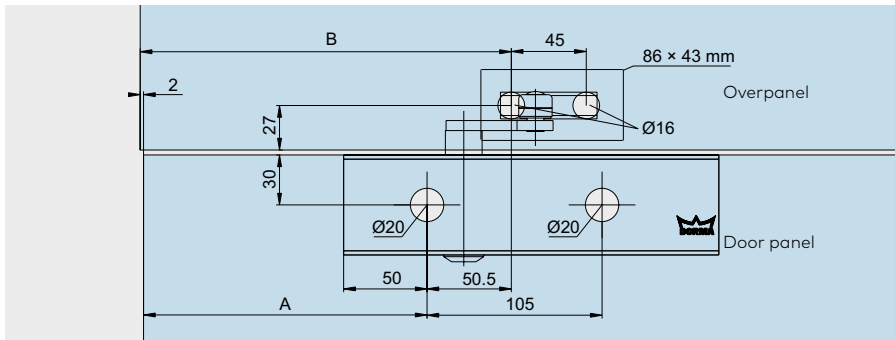Weight in kg:  
Aluminum 0.132




Pivot point fitting	A	B
EA (AT)	195	248
UNIVERSAL/EP/ MUNDUS	245	298
STUDIO/JUNIOR	170	223
UNIVERSAL Arcos	262	315

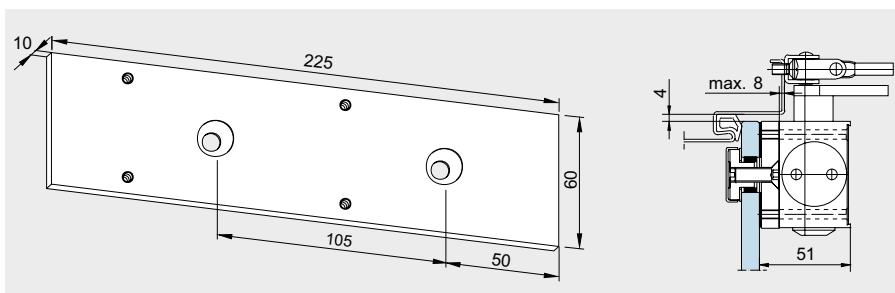

**Fixing plate**  
225 mm,  
for DORMA TS 73 V


**Art. No. 12.335**

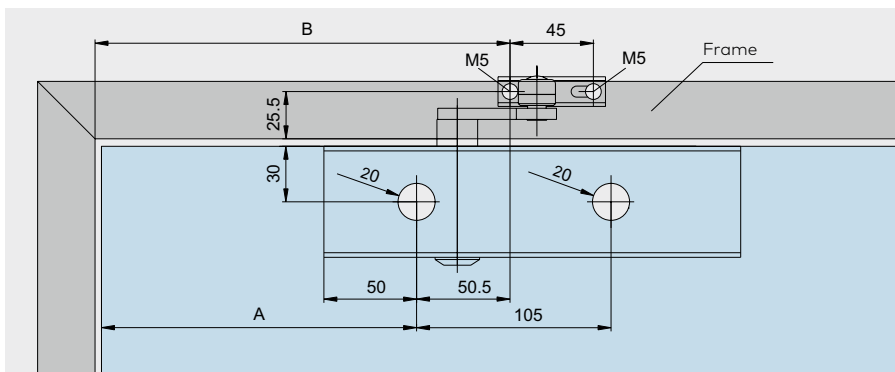Weight in kg  
Aluminum 0.289



Pivot point fitting	A
EA (AT)	195
UNIVERSAL/EP/ MUNDUS	245
STUDIO/JUNIOR	170
UNIVERSAL Arcos	262


# Accessories for door closer TS 92

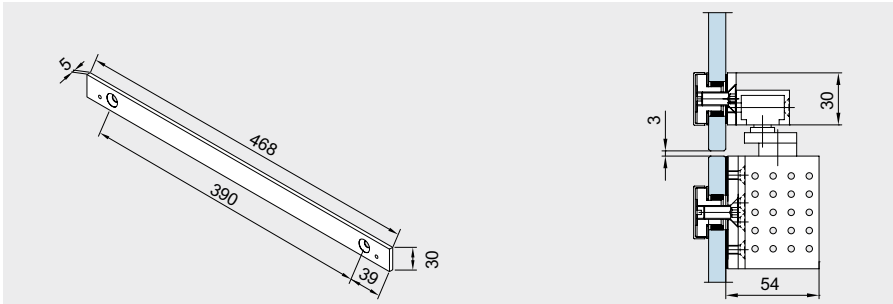


**Fixing plate**  
for DORMA TS 92,  
slide channel for overpanel

**Art. No. 12.332**

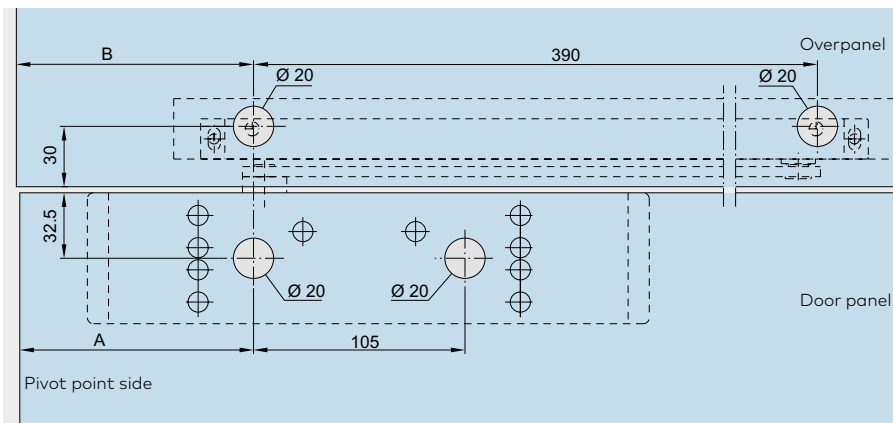Weight in kg  
Aluminum 0.265




Drehpunkt-Beschlag	A	B
EA (AT)/EP	200	202
UNIVERSAL/ MUNDUS	250	252
STUDIO/JUNIOR	148	250
UNIVERSAL Arcos	265	267

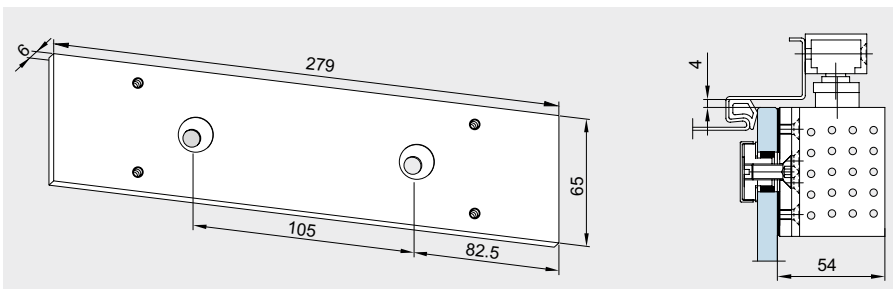


**Fixing plate**  
279 mm,  
for DORMA TS 92

**Art. No. 12.334**

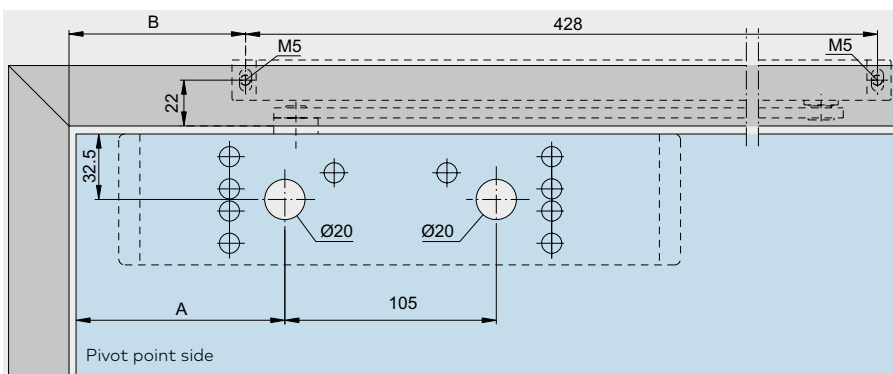Weight in kg:  
Aluminum 0.290




Drehpunkt-Beschlag	A
EA (AT)/EP	200
UNIVERSAL/ MUNDUS	250
STUDIO/JUNIOR	148
UNIVERSAL Arcos	265

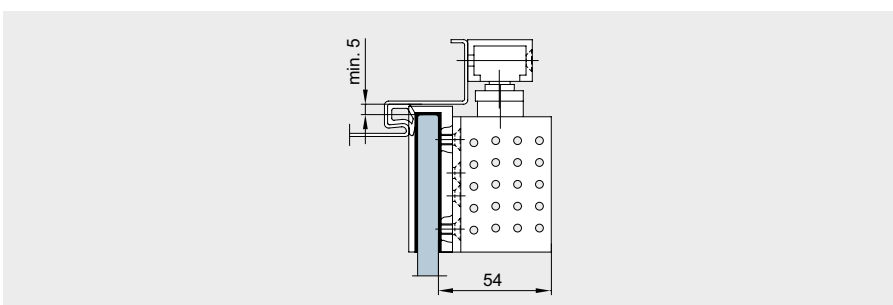

**Saddle plate**  
and door closer TS 92 are  
available at dormakaba,  
Ennepetal, or at special  
suppliers for building hard-  
ware.

## Door closer TS 97

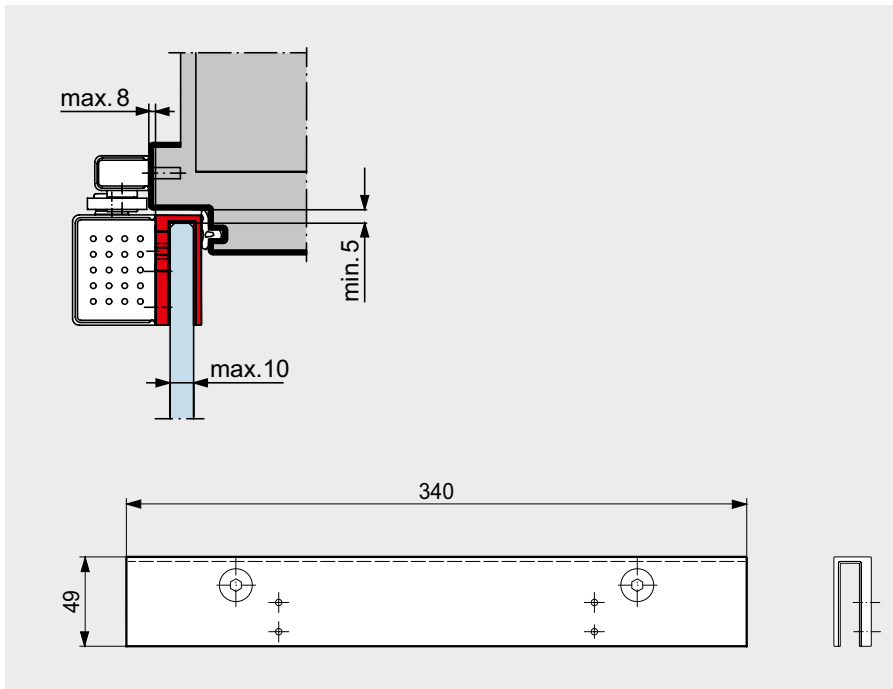

### TS 97 including saddle plate

For connecting the closer to toughened glass doors – no glass recess machining or drilling required.

The DORMA TS 97 with this special glass fixing bracket should be used with STUDIO Arcos and OFFICE Arcos / OFFICE Junior hinges.

For more information please see our technical brochure TS 97.

## Space for your notes

## Pull handles, door knobs and recessed pull grip

The pull handle/knob system is designed for glass of 8, 10 and 12 mm thickness.

The pull handles can be fixed to both sliding and pivoting (swing) doors on one face using the appropriate connectors or on both faces by through-bolting (back-to-back arrangement).

Due to a flat structure recessed pull grips are also suitable for sliding doors.

The single-point fixings and through bolts are included as standard equipment in the scope of supply.

The pull handles can be fitted horizontally, vertically or in a handrail arrangement.





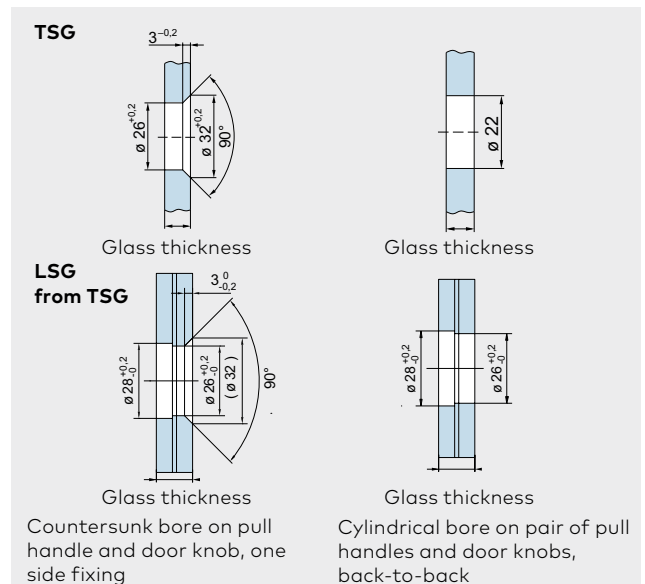
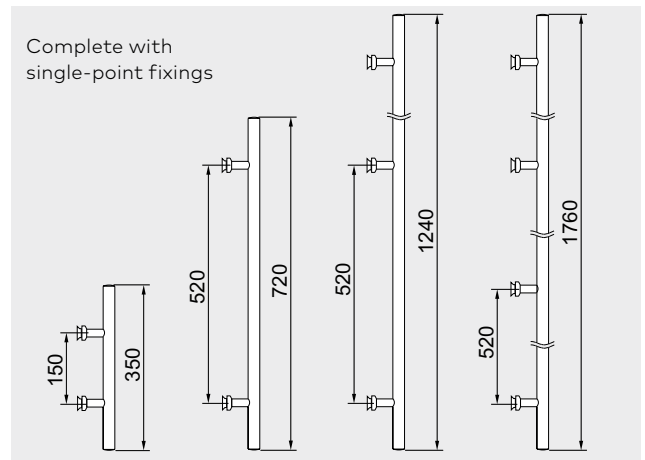
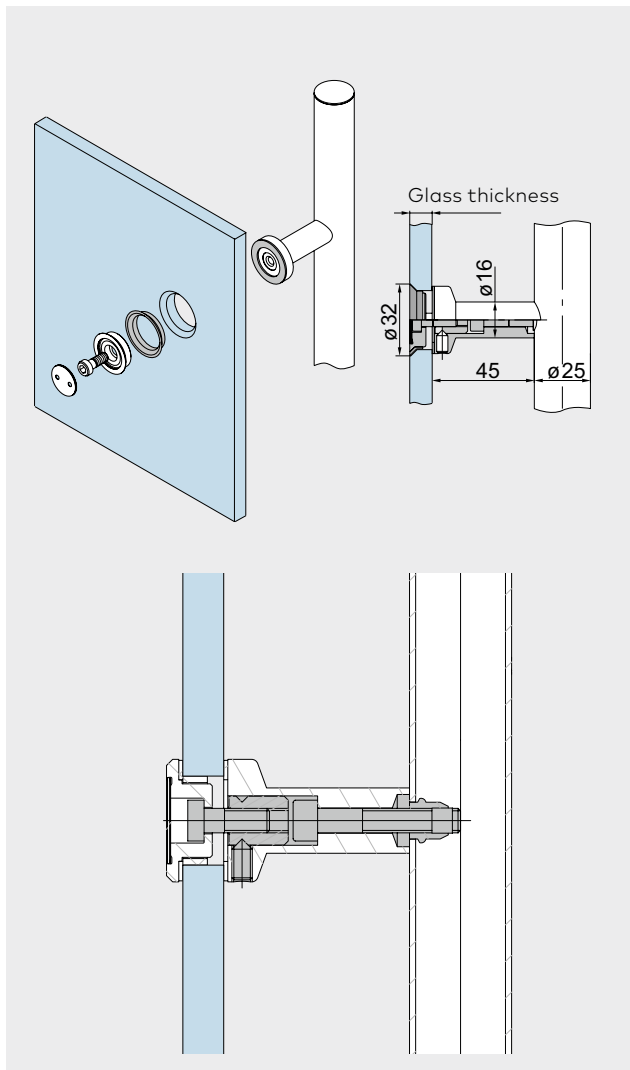


	Product description	Glass thickness	Art. No.
	<p><b>Pair of handle bars satin stainless steel</b> length 350 mm, 2 fixing points, weight in kg: 1.254 material 1.4305 do., material 1.4404</p>	8/10/12 mm	<b>21.267*</b> <b>21.247</b>
	<p><b>Pair of handle bars aluminum</b> length 350 mm, 2 fixing points, weight in kg: aluminum 1.326</p>	8/10/12 mm	<b>03.400</b>
	<p><b>Pair of handle bars satin stainless steel</b> length 720 mm, 2 fixing points, weight in kg: 1.947 material 1.4305 do., material 1.4404</p>	8/10/12 mm	<b>21.270*</b> <b>21.250</b>
	<p><b>Pair of handle bars aluminum</b> length 720 mm, 2 fixing points, weight in kg: aluminum 2.423</p>	8/10/12 mm	<b>03.402</b>
	<p><b>Pair of handle bars satin stainless steel</b> length 1,240 mm, 3 fixing points, weight in kg: 3.400 material 1.4305 do., material 1.4404</p>	8/10/12 mm	<b>21.273*</b> <b>21.253</b>
	<p><b>Pair of handle bars satin stainless steel</b> length 1,760 mm, 4 fixing points, weight in kg: 5.000 material 1.4305 do., material 1.4404</p>	8/10/12 mm	<b>21.276*</b> <b>21.256</b>






\* Conversion sets for back to back pull handles for timber doors resp. other glass thicknesses see unter "Spacing adjustment for pull handles and door knobs", page 243.

# Pull handles single

	Product description	Glass thickness	Art. No.	
	<b>Pull handles with single-point fixings, countersunk</b> <b>Edelstahl</b> Pull handle 350 mm with 2 fixings, material 1.4305 do., AISI 316L Pull handle 720 mm with 2 fixings, material 1.4305 do., AISI 316L Pull handle 1,240 mm with 3 fixings, material 1.4305 do., AISI 316L Pull handle 1,760 mm with 4 fixings, material 1.4305 do., AISI 316L	8/10/12 mm	<b>29.268</b> <b>29.269</b> <b>29.271</b> <b>29.272</b> <b>29.274</b> <b>29.275</b> <b>29.277</b> <b>29.278</b>	
		<b>Pull handles with single-point fixings, clamping disc</b> Pull handle 350 mm with 2 fixings, material 1.4305 do., AISI 316L Pull handle 720 mm with 2 fixings, material 1.4305 do., AISI 316L Pull handle 1,240 mm with 3 fixings, material 1.4305 do., AISI 316L Pull handle 1,760 mm with 4 fixings, material 1.4305 do., AISI 316L	8/10/12 mm	<b>21.240</b> <b>21.241</b> <b>21.281</b> <b>21.242</b> <b>21.243</b> <b>21.283</b>




# Spacing adjustment for pull handles and door knobs

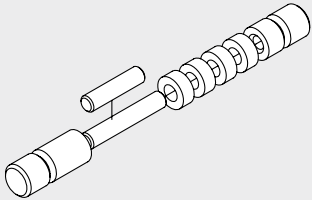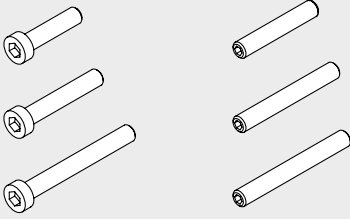
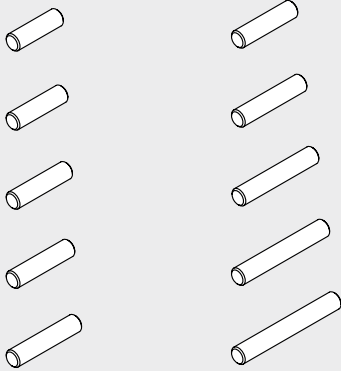
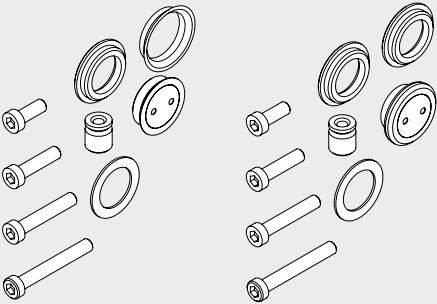
	Product description	Door thickness	Art. No.
 <p>Distance washer 2 mm</p>	<p><b>Conversion set 1 for glass doors,</b> pair of pull handles / knob back-to-back</p> <p>without distance washer with 1 distance washer with 2 distance washers with 3 distance washers with 4 distance washers</p>	<p>13.5 – 21.5 mm</p> <p>13.5 mm 15 mm 17.5 mm 19 mm 21.5 mm</p>	<b>21.285</b>
 <p>Distance washer 5 mm</p>	<p><b>Conversion set 2 for timber doors,</b> pair of pull handles / knob back-to-back</p> <p>without distance washer with 1 distance washer with 2 distance washers with 3 distance washers with 4 distance washers</p>	<p>20 – 40 mm</p> <p>20 mm 25 mm 30 mm 35 mm 40 mm</p>	<b>21.286</b>
 <p>Set 3                      Set 4</p>	<p><b>Conversion set 3 for glass / timber doors*,</b> pair of pull handles / knob back-to-back, countersunk 15 - 40 mm glass / timber thickness</p>		<b>21.287</b>
	<p><b>Conversion set 4 for glass / timber doors*,</b> pair of pull handles / knob back-to-back, clamping disc 15 - 40 mm glass / timber thickness</p>		<b>21.288</b>
 <p>Set 5                      Set 6</p>	<p><b>Conversion set 5 for glass doors*,</b> recessed pull grip 13.5 - 21.5 mm glass thickness</p>		<b>21.295</b>
	<p><b>Conversion set 6 for timber doors*,</b> recessed pull grip 20 - 40 mm timber thickness</p>		<b>21.296</b>
 <p>Set 7                      Set 8</p>	<p><b>Conversion set 7 for glass / timber doors*,</b> for pull handles fixed on both sides to pull handle fixed on one side, countersunk 8 - 40 mm glass / timber thickness 1 set per pull handle fixing</p>		<b>21.297</b>
	<p><b>Conversion set 8 for glass / timber doors*,</b> for pull handles fixed on both sides to pull handle fixed on one side, clamping disc 8 - 40 mm glass / timber thickness 1 set per pull handle fixing</p>		<b>21.298</b>

\*Not suitable for Arcos pull handles 26.500 / 26.510


# Pair of pull handles

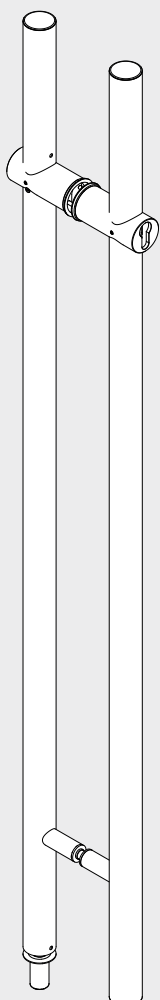	Product description	Glass thickness	Art. No.
	<p><b>Pair of stainless steel handlebars,</b> lockable on both sides, prepared for standard PZ, length 1200 mm, incl. floor socket</p>	<p>8 – 12 mm</p>	<p><b>21.580</b></p>
	<p><b>Pair of stainless steel handlebars,</b> lockable on one side, prepared for standard PZ, length 1200 mm, incl. floor socket</p>	<p>8 – 12 mm</p>	<p><b>21.581</b></p>






# Arcos pull handle

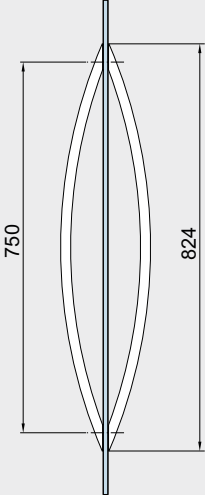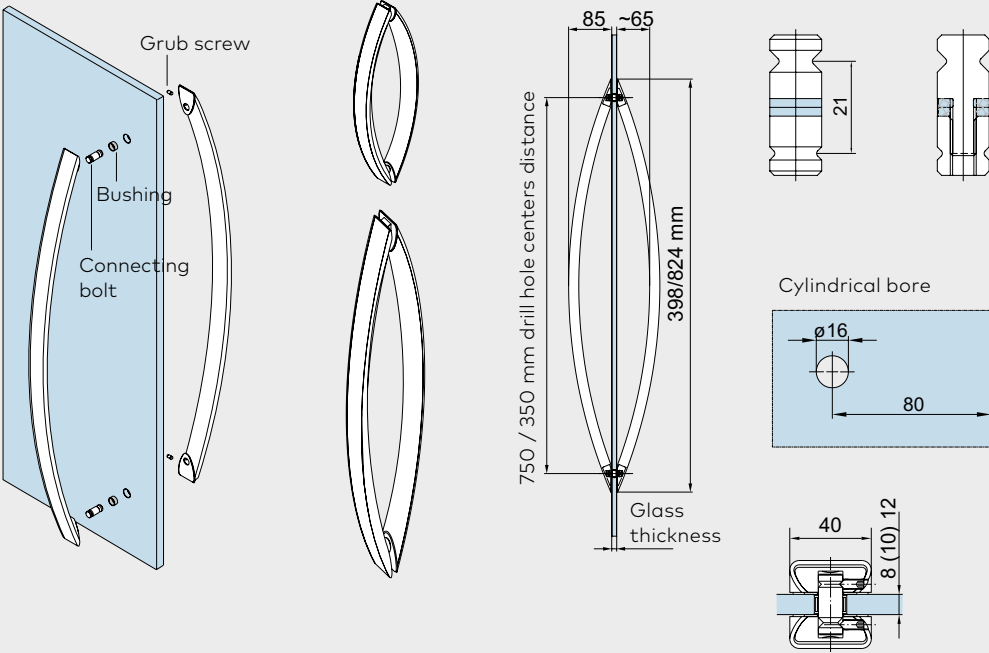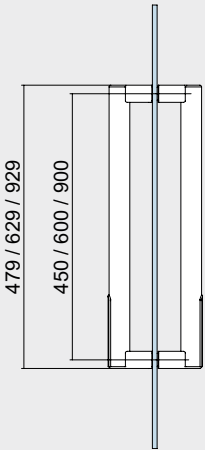	Product description	Glass thickness	Art. No.
	<p><b>Arcos pair of pull handle</b> incl. connecting bolt Aluminium, stainless steel look</p> <p>Pull handle 350 mm with 2 fixings Pull handle 750 mm with 2 fixings</p>	<p>8/10/12 mm</p>	<p><b>26.500</b> <b>26.510</b></p>
	<p><b>BEYOND pull handle</b> Glas thickness 10 / 12 mm with 2 fixing points (through bore diameter 22 mm)</p> <p>Length 450 mm Length 600 mm Length 900 mm</p>		<p><b>30.300</b> <b>30.305</b> <b>30.310</b></p>
			

# Handle bars

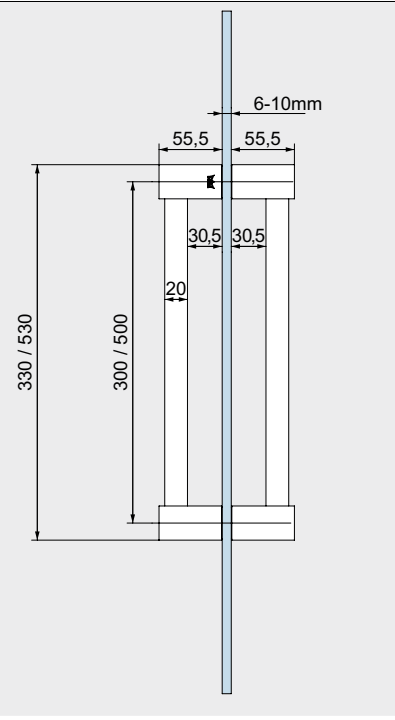	Product description	Art. No.
	<p><b>Pull handle "Quadrat"</b>                      Glas thickness 6 - 10 mm                      with 2 fixings</p> <p>Length 300 mm                      Length 500 mm</p>	<p><b>75.084</b>  <b>75.085</b></p>

# Recessed pull grips and door knobs

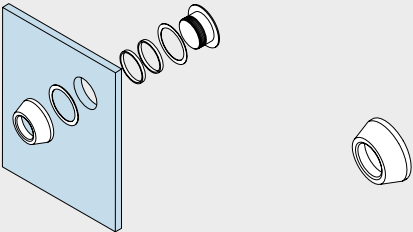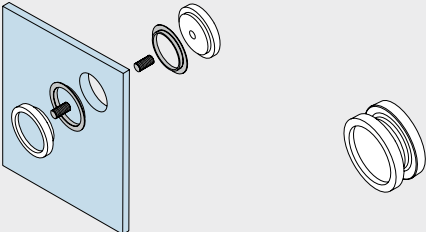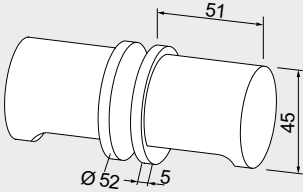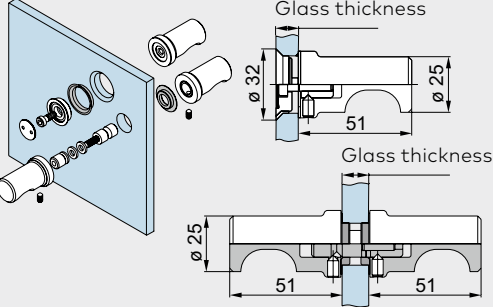	Product description	Glass thickness	Art. No.
 <p>Ø 38 mm Glass bore</p>	<p><b>Recessed pull grip</b> Ø 50 mm</p>	8/10/12 mm	<b>21.290</b>
 <p>Ø 50 mm Glass bore</p>	<p><b>Recessed pull grip</b> Ø 60 mm</p> <p><b>Recessed pull grip with grip hole</b> Ø 60 mm</p>	8/10/12 mm  8 mm 10 mm 12 mm	<b>21.291</b>  <b>21.292</b> <b>21.293</b> <b>21.294</b>
 <p>Ø 50 mm Glass bore</p>	<p><b>Recessed pull grip</b> aluminum to be glued onto the glass Weight in kg: 0.072</p>		<b>07.200</b>
 <p>Ø 20 mm Glass bore</p>	<p><b>Door knob,</b> aluminum Weight in kg: 0.400</p>		<b>07.201</b>
 <p>Single-point fixing clamping disc (Ø 22 mm)</p> <p>(Glass preparation please see under "pull handles single", page 242)</p>	<p><b>Door knob one side fixing</b></p> <p>Door knob with single-point fixing, countersunk Door knob with single-point fixings, clamping disc</p> <p><b>Door knob back-to-back</b></p>	8/10/12 mm	<b>21.422</b> <b>21.426</b> <b>21.423</b>

**Note:** To ensure better load transmission, please use a pull handle in conjunction with the DORMOTION damping unit.

# Safety-related information

## Important safety-related information for the mounting and use of dormakaba glass fittings

(Follow these instructions in addition to the mounting and operating instructions in order to avoid damage of product and damage to person or property.)

**Important:** All users have to be informed about relevant points mentioned in these safety-related information and the mounting and operating instructions!

### General information

1. dormakaba recommends using TSG-H (heat soaked toughened safety glass) to DIN EN 12150-1.
2. dormakaba glass fittings are not suitable for application in rooms where chemicals (e. g. chlorine) are used such as indoor swimming pools, saunas or salt-water pools.
3. Never move sliding panels faster than walking speed and always stop the door manually before it reaches end position.
4. Do not shut swing doors with excessive force. Install door stop to prevent door from opening too far.

### Mounting

1. Only properly qualified and specially trained staff is authorised to mount dormakaba glass fittings.
2. Never use glass with conchoidal fractures and/or damaged edges.
3. Due to crushing hazards – among others in the area of the secondary closing edge – and possible injury caused by breakage of glass during mounting, corresponding protective clothing (especially gloves and protective goggles) is required.
4. Clean clamping area with fat solvent (standard commercial cleaning agent) before mounting the glass fitting.
5. Never use clamping shoes on structured glass surfaces (except on satined glass) or glass of heavily varying thickness unless with a corresponding levelling layer.
6. Never use clamping shoes on self-cleaning coatings.
7. When adjusting glass elements, always stick to the required clearance for the respective fitting. Adjust clearance so that the glass does not touch hard components such as glass, metal or concrete.
8. Make sure not to use excessive force when installing the glass (avoid local stress resulting from very tight screws).

### Maintenance

Check fittings at regular intervals for proper positioning and smooth running and door for correct adjustment. Especially highly-frequented door systems require inspection by properly qualified staff (specialised companies or installation firms). Immediately replace damaged glass elements (no glass flaking and/or conchoidal fractures)!

### General care instructions

The surface finishes of the fittings are not maintenance-free and should be cleaned according to their material and design.

- For metallic surfaces (anodised finishes, stainless steel) please use appropriate cleaning agents without abrasive additives only.
- For varnished surfaces please use appropriate solvent-free cleaning agents only.
- Brass surfaces (without surface protection) have to be treated with an appropriate maintenance agent on occasion, to avoid tarnishing.

**For practical planning, please use our drawings dormakaba DETAIL.**

The printed colours indicating the surface finishes are not 100% true, but do provide a useful guide.

Statements made with regard to the nature or use of the products are for the purposes of descriptions. Assent with regard to the existence of particular properties or particular uses always requires special written agreement. Pictures may show special designs which are different to the standard scope of delivery.

Subject to change without notice.



**Space for your notes**







[www.glas-innovationen.com/en](http://www.glas-innovationen.com/en)



**Door  
Hardware**



**Electronic  
Access & Data**



**Mechanical  
Key Systems**



**Lodging Systems**



**Entrance  
Systems**



**Interior Glass  
Systems**



**Safe Locks**



**Service**

**dormakaba**  
**International Holding AG**  
Hofwissenstrasse 24  
CH-8153 Rümlang  
T +41 44 818 90 11  
[info@dormakaba.com](mailto:info@dormakaba.com)  
[www.dormakaba.com](http://www.dormakaba.com)