

MUTO Comfort L 80 Pocket Ceiling slot solution

The system MUTO Comfort L 80 Pocket for concealed installation in ceiling slots or suspended ceilings is based on the proven modular MUTO components. All functional elements are concealed in the track profile, which is completely integrated into the ceiling or into a lintel.

In order to realize the usual simple installation with full visibility even with the ceiling slot solution, some components were supplemented or modified. New is the pocket profile, which, connected to the track profile, creates a larger access area for installation. A correspondingly wider view protection profile is fitted to the bottom of the track profile after completion of assembly. The system can be integrated flush with the ceiling without visual breakage thanks to the wide range of color options (aluminium anodised or powder-coated in RAL colors of choice).

Room-high without visible profile

The sliding doors can be designed with 1 or 2 panels in glass or timber (with adapter). Depending on the given architecture and desired passage width, the optional combination with glass side panels* results in different design variants.

Product features:

Glass door thickness: 8 - 13.5 mm
 Timber door thickness: 28 - 50 mm
 Glass side panel thickness: 8 - 13.5 mm*
 Door weight: max. 80 kg
 Door width: min. 660 - max. 2000 mm
 Door height: max. 3000 mm
 Finishes: Aluminium, powder coated (RAL colors) or anodized

Advantages:

- Sliding door solution fully integrated in the interior design.
- Room-high doors without visible profiles.
- Easy access to all functional elements during installation and after assembly. This MUTO philosophy also applies to the ceiling slot design.
- Anti-jump mechanism - holds the door securely on the running track
- Height adjustment - also subsequently adjustable
- Replaceability of single components (e.g. endstops, DORMOTION units)
- Disassembly / re-assembly possibility of the complete panel (in case of glass breakage or change to another glass design)
- Possibility to change from glass door to timber door with adapter and vice versa

* Solutions with glass side panels coming soon

MUTO Comfort L 80 Pocket

Installation possibilities in ceiling slot.

System characteristics:

- MUTO sliding door system for flush installation in ceiling slots or suspended ceilings
- With the proven MUTO design features: Modular profile system with integrated functional elements with full visibility during the easy assembly
- Glass and timber sliding doors
- 1- and 2-panel doors, with and w/o glass side panels*
- DORMOTION damping function for both the opening and the closing direction
- Pull handles or recessed pull grips from our portfolio for comfortable operation of the sliding door

A. Door - Installation in front of a wall opening

1-panel door




2-panel door



B. Door with glass side panel/s - Installation in front or completely / partially within a wall opening

1-panel door with 1 side panel

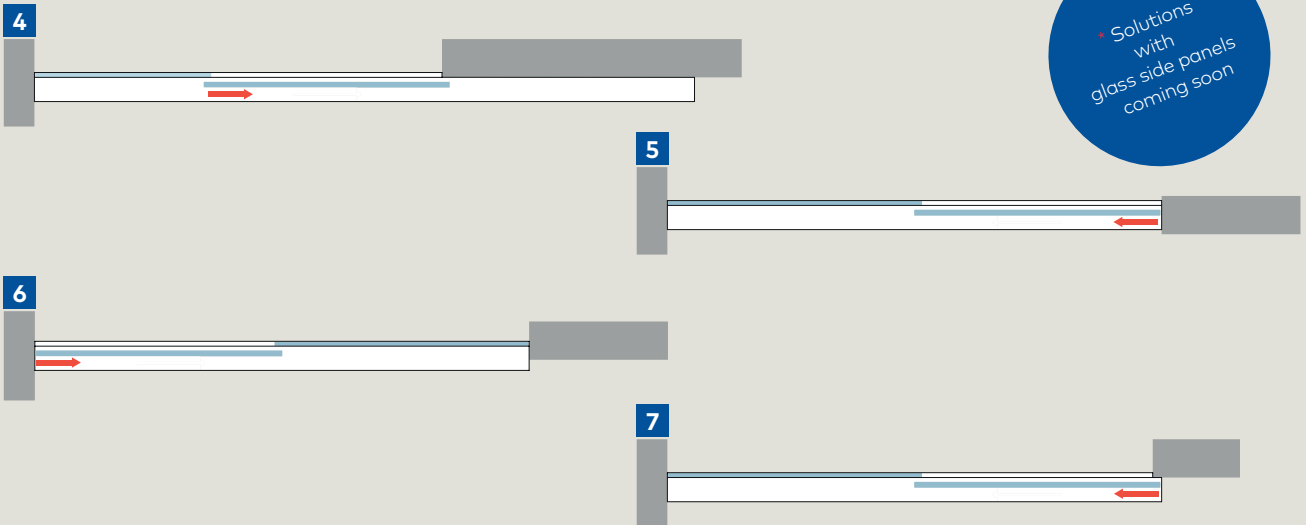


* Solutions with glass side panels coming soon

1-panel door with 2 side panels



2-panel door with 2 side panels

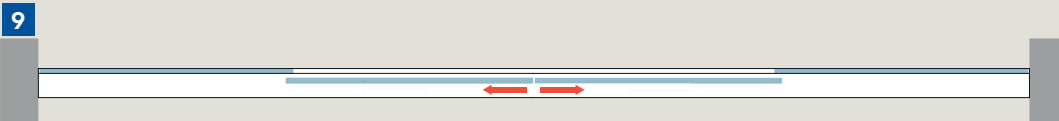

Any questions? We would be happy to answer any questions you may have.