Technical brochure

Patch fittings & profile systems

Issue 2025

Batch 1



Note: The pictograms in this price list are only intended to provide easier orientation. They are not true to scale and do not represent the exact design of the products! We reserve the right to make technical changes.

Our general terms and conditions can be found on the Internet at www.dorma-glas.com.



Our Sustainability Commitment

We are committed to foster a sustainable development along our entire value chain in line with our economic, environmental and social responsibilities toward current and future generations.

Sustainability at product level is an important, future-oriented approach in the field of construction. In order to give quantified disclosures of a product's environmental impacts through its entire life cycle, DORMA-Glas provides Environmental Product Declarations (EPDs), in which the results of the life cycle assessment (LCA) are presented.

Content





O6 MUNDUS
Components for toughened glass assemblies



40 **UNIVERSAL**Components for toughened glass assemblies



72 RP
Double-action
door system for
toughened glass
assemblies



78 BEYOND

Double-action
door system for
toughened glass
assemblies



88 EA
Components for single-action doors



102 TP/TA Easy Safe
Door rails for
double-action and
single-action doors



132 TP/TA 76.5

Door rails for double-action and single-action doors



154 MANET
Single-point fitting
system, stainless
steel



172 SG
Centre and
corner locks
for toughened
glass assemblies



192 Wall connection profile

Bearing wall connecting profile system



198 MR 22/MR 28
Wall connecting
profile system,
non-bearing



20/ Accessories

The DORMA-Glas range of fittings for toughened glass assemblies

The DORMA-Glas range of fittings for toughened glass assemblies has matured into one of the most comprehensive available today. It offers ideal options for creating all standard toughened glass assemblies in a manner which is technically sound and visually attractive. This gives the designer a wide variety of options for individual expression in creating with toughened glass – either internally or externally.

All DORMA-Glas fittings are based on a modular system, consisting of a base unit, functional inserts and clip-on covers in the widest possible range of finishes. The glass preparations that are needed can be performed quickly and easily. Quality materials and thorough workmanship guarantee a long service life and a reflection of excellence for years to come.

Applications and features MUNDUS portfolio is being	Comfort	NDUS t/Premium	UNIVERSAL patch fittings	BEYOND	EA
For external assemblies phased out	•	•	•		•
For internal assemblies	•	•	•	•	•
For standard toughened glass assembly types	•	•	•	•	•
For individually designed assemblies with corner fittings, fin fittings etc.			•		
For double-action doors	•	•	•	•	
For single-action doors	•	•	•	•	•
Glass thickness (mm) (Generally, glass thickness tolerances within the +/- 0.5 mm range can be accommodated)	8-12	8-22	8, 10, 12 ⁶⁾	10, 12	8, 10, 12
Glass thickness (mm), for UNIVERSAL with 15 mm pivot point			8, 10		
Max. door weight (kg)	150	200	1102)5)	80	80/1104)
Max. door weight (kg) for UNIVERSAL with 15 mm pivot point			80		
Max. door width (mm)	1100	1300	11002)5)	1000/12004)	1000/ 1100 ⁴⁾
Max. door height (mm)	door dime	latrix for ensions, page 10	3000 ¹⁾²⁾⁵⁾	2200 ⁴⁾⁵⁾	30001)2)
Glass type	TSG	TSG/LSG ³⁾	TSG	TSG	TSG
Double-action / single-action door	sa/da	sa/da	sa/da	sa/da	sa
Materials and finishes					
AL mill finish (100)					
AL anodized, EV1, sanded, matte (for profiles: stained, matte) (101)			•		•
AL anodized, EV1 Deco, satin, matte (compatible with finish 150) (114)				•	
AL anodized, similar stainless steel, polished, matte (107), AL anodized, similar stainless steel, satin (for profile material) (similar Anodizing II C 31) (113)				● (107)	• (107)
AL anodized, Silver, satin, matte (compatible with finish 114) (150)	•	•			
AL anodized, special (199)		•	•		•
AL powder coated, Traffic white, smooth, glossy (sim. RAL 9016) (300)					•
AL powder coated, Traffic white, smooth, semi gloss (sim. RAL 9016) (350)	•	•	•		
AL powder coated, Special color (Standard powder according to the corresponding overview on our website. A price surcharge is possible for special colors outside the color range specified there.) (399)			•		•
Brass, polished, chromed (501)			•		•
Brass, polished (503)			•		•
Stainless steel, satin (compatible with 750) (700)			•		
Stainless steel, polished (compatible with 751) (701)			•		
Stainless steel, satin (for MUNDUS) (compatible with 700) (750)	•	•			
Stainless steel, polished (for MUNDUS) (compatible with 701) (751)	•	•			
Page		6	40	78	88

4 Dimensions in mm. 01/23

Door rails and locks ideally complement the DORMA-Glas product range for toughened glass assemblies. The door rails grant all requests for wide and heavy doors, also for side panels. They guarantee the maximum protection for the lower glass edge. With its different types and finishes the lock programme SG meets various requirements for function, safety and appearance.

TP/TA EASY Safe	MANET	SG	Wall connection profile	MR 22/ MR 28
•		•	•	
•	•	•	•	•
•	•	•	•	
0				
•	•	0	0	
•	0	0		
8, 10, 10.76 12, 12.76, 13.5, 15, 17, 19	10, 12 , 13.5	8, 10, 12	8, 10, 12, 12.7, 13.5, 15, 17, 19	6, 8, 10
150*	80		45 kg/m	
1400*	1200			
3500 ¹⁾²⁾⁵⁾ 4000 ⁴⁾	2500 ¹⁾²⁾⁵		3000 ¹⁾²⁾⁵	2500/ 2800 ¹⁾²⁾⁵
TSG/LSG ³⁾	TSG	TSG	TSG/LSG ³⁾	TSG
sa/da	sa/da	sa/da		
•			•	
•		•	•	•
		•	•	•
•		•	•	
•		•		
•	•			
102	156	172	192	198

- For door heights up to 2500 mm For doors with a height of more than 2500 mm we have to keep additional conditions/limits:
 - Glass thickness >/= 10 mm
 - Usage of a handle bar with 3 connection points in minimum and a minimum height of 2/3 door height
- Use of door closers: Doors < / = 1100 mm must be provided with door closers of type EN 3 (with or without backcheck), and doors > / = 1100 mm need to be fitted with larger door closers (e.g. EN 4, 5 or 6) with or without backcheck.
- 3) Laminated safety glass of 2 x toughened safety glass
- 4) Max. panel weight depends on product combination
- 5) Further possible glass panel heights on request at our application engineering
- Under certain circumstances also 15 + 19 mm glass thicknesses

The glass dimension may differ due to items as follows:

- · installation type,
- glass tolerance,
- generally use
- $\\ \bigcirc \\ \\ \text{Optional} \\$
- Standard
 - *Only for double-action doors with door rail top and botton, incl. steel door lever

Note: The use of clamp fittings on structured glass surfaces (except of which are satinized glasses) or glasses with large variations in glass thickness is only with the application of a levelling layer permissible.

Door rails are not available in finishes 501 and 503.

ContentMUNDUS



80	General information
09	Technical information
10	Matrix MUNDUS
12	Clamp&Glue technology
14	Type illustration
16	Technical details
18	Components
29	Installation details
30	Accessories MUNDUS
34	Glass preparation
04	Accessories
26	Safety-related information

6 12/21



MUNDUS

The
MUNDUS
portfolio
is being
phased out

MUNDUS – The freedom of versatility



Compelling benefits:

- · Clear design lines, no visible fixings
- Wide range of surface finishes, colours and materials
- Particularly easy to install: Many MUNDUS fittings can be mounted on the glass and fixed into place in their as-delivered condition
- Fast installation, simple in-situ adjustment of the installed system
- set up for the right glass thickness: adaptable to different glass thicknesses without the need to change gaskets
- Improved load-bearing performance and more secure hold thanks to high-strength materials (screws and threaded sleeves of high-grade stainless steel capable of absorbing high clamping forces)
- Use of laminated safety glass (LSG) using DORMA-Glas's proven Clamp&Glue technology for high quality and safety demands (MUNDUS Premium)

Elegant appearance

MUNDUS fittings impress through their elegant design combining sharply defined, straight edges and rounded corners, high-quality materials and careful workmanship. There are no fixings to disrupt the smooth harmony of the surface finish. For a durable, elegant appearance, the cap consists of 2 mm thick and therefore particularly robust material – stainless steel or aluminum.

MUNDUS offers patch fittings for 24 standard systems and numerous special solutions

– whether for an open-plan residential ambience, attractive office or prestigious shop entrance. Visually and technically impressive, MUNDUS glass fittings are suitable for a wide range of different requirements. The extensive portfolio encompasses connection fittings for the usual 24 standard systems such as PT 10, PT 40 or PT 70. It also accommodates special solutions for custom spatial requirements, such as PT 41 and PT 61 for glass assemblies stiffened with 90° glass fins.

Quick and easy to install

MUNDUS fittings offer multi-dimensional in-situ adjustability, ensuring a firm fit every time. They facilitate infinite variability of the vertical gap dimensions and thus consistently correct setting of the pivot axis and zero position.

Wide choice of finishes



Standard collection


DORMA-Glas standard finishes, anodized or coated, satin or polished stainless steel.

Exclusive collection

Treated metals such as anodized aluminum.

8 01/23

MUNDUS – the technical specifications at a glance

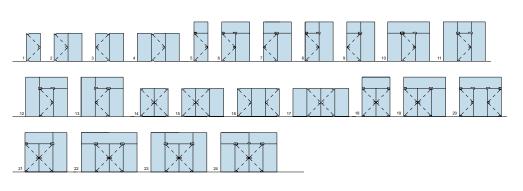



MUNI	ous	MUNDU	S Premium	MUNDUS	Comfort
Max. I	oad-bearing capacity	20	0 kg	150 kg	
Мах. ј	panel width	1300 mm 1100 mm		mm	
			dth depends on glass t on the following page		
Possik	ole glass thickness	12-1 15-1	12 mm 15 mm 19 mm 22 mm	8-12	mm
Suital	ole for LSG*		•	-	
Suppo	orted pivot points in mm	55, 65	, 70 mm	55, 65, 7	70 mm
Offse	t adjustability in mm	Infinite (± 3 m	nm); 52–73 mm	Infinite (± 3 mm	n); 52–73 mm
Adjus	tability of the door/insert	Multi-di	mensional	Multi-dim	ensional
Cover	materials	Stainless steel, a	luminum, glass etc.	Stainless stee	el, aluminum
Test c		100	00000	5000	000
	se-Test according to EN 12400 se-Test according to EN 1670	Test certificates fro	om an external accredit	ed authority can be p	rovided on request.
Finish	es	Availability	Corrosion class	Availability	Corrosion class
Stanc	lard Collection Aluminium, powder coated				
White					
350	AL powder coated, Traffic white, smooth, semi gloss (sim. RAL 9016)	•	4	•	4
Speci	als				
399	AL powder coated, Special color (Standard powder according to the corresponding overview on our website.	•	4	•	4
Stanc	lard Collection Aluminium, mill finish and anodize	ed			
150	AL anodized, Silver, satin, matte (compatible with finish 114)	•	4	•	4
	lard Collection Stainless steel, us finish treatments				
750	Stainless steel, satin (for MUNDUS) (compatibution with 700)	le •	4	•	4
701	Stainless steel, polished (compatible with 752	L) •	4	•	4
Stanc	lard Collection Brass, various finish treatments				
503	Brass, polished	•	4		
501	Brass, polished, chromed	•	4		
Exclus	sive Collection				
157	AL anodized, similar stainless steel, satin	•	4		4
Brass	Antique	•	4		
Black	Bronze	•	4		

¹ – 4 Corrosion class according to EN 1670 (independent test confirmation on request) $\boldsymbol{\cdot}$ Standard


01/23

 $^{^*}$ LSG out of 2 x TSG (= 2 panes each with a minimum glass thickness of 5 mm). Can be implemented with separately ordered gaskets and deploying DORMA-Glas's proven Clamp&Glue technology.

MUNDUS – Matrix for door dimensions



This matrix is only used to select the correct fitting and does not represent a static!

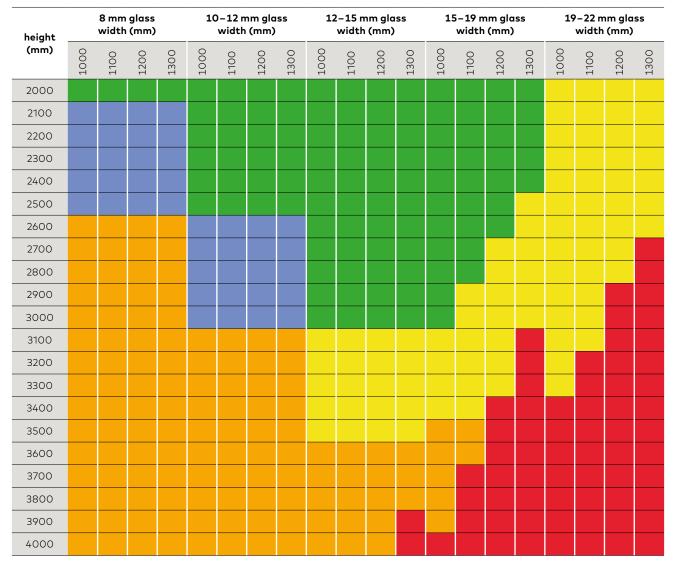

Suitable for use without any technical limitations.

Pull handle necessary extending over 2/3 of the door height with at least 3 fixing points.

Glass and fitting must be adhesive-bonded.

Use of MUNDUS fittings is not recommended. Please contact your DORMA-Glas partner

in order to discuss possible alternatives.

This door dimension is unfortunately not possible with MUNDUS.

10 01/25

Extensive suitability, effortless installation





12 12/20






MUNDUS Premium – Providing a totally reliable hold – Clamp&Glue technology

Providing a totally reliable hold – Clamp&Glue technology

Proven DORMA-Glas technology for the installation of laminated safety glass. An additional adhesive bond ensures a firm hold and permanent cohesion between fitting and glass.

The bonding process following the fixing of the fitting is remarkably easy:

- Before commencing with the gluing operation, you will need to replace the standard gaskets with special gaskets suitable for laminated safety glass*
- The glue is fed through the holes provided until it emerges from the overflow openings in the clamp fittings
- The process is then repeated on the rear face
- · Allow the glue to harden.



*The LSG gaskets may only be used when fixing glass using the Clamp&Glue technology


MUNDUS and laminated safety glass (LSG) – a combination that offers impressive advantages:


- High safety for users, even in the case of large glass assemblies
- Improved acoustic insulation and reduced noise levels achievable by integrating a sound deadening film
- Deploying glass doors as a design element specially designed films for individual aesthetics
- Use of LSG comprising 2 x TSG (= 2 panes each with a minimum glass thickness of 5 mm).

Type illustration



Toughened glass assemblies with fittings (55/65/70 mm pivot point) and locks.

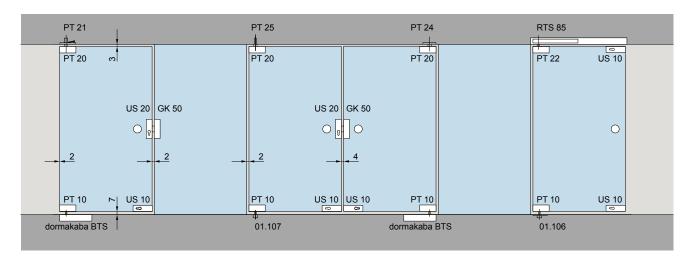

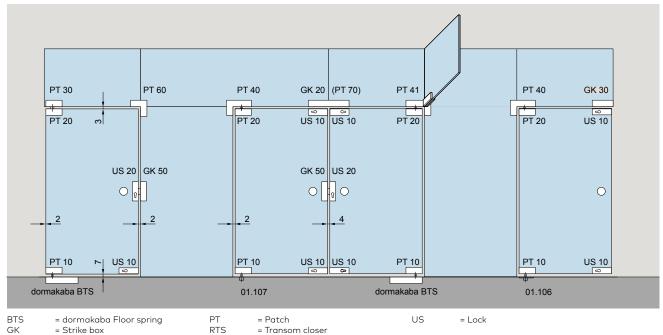

Maximum door weight and width for MUNDUS fittings

Max. door weight:

MUNDUS Premium: 200 kg MUNDUS Comfort: 150 kg

Max. door width:

MUNDUS Premium: 1300 mm MUNDUS Comfort: 1100 mm For doors with a height of more than 2500 mm we should keep additional conditions/limits:

- Glass thickness ≥ 10 mm
- Usage of a handle bar with 3 connection points in minimum and a minimum height of 1/2 door height

The max. panel width depends on glass thickness and weight. For more information please see on page 10, MUNDUS - Matrix for door dimensions.

14 Dimensions in mm. 12/21



Use of door closers:


Doors < / = 1100 mm must be provided with door closers of type EN 3 (with or without backcheck), and doors > / = 1100 mm need to be fitted with larger door closers (e.g. EN 4, 5 or 6) with or without backcheck.

Glass panels

The individual glass panels may show production tolerances in geometry and dimensions that sum up to larger deviations in larger glass assemblies. These deviations are not shown in the exemplary constructional set up above.

Note for stiffening elements:

"Left" or "Right" is always determined from the outside and as viewed from above.

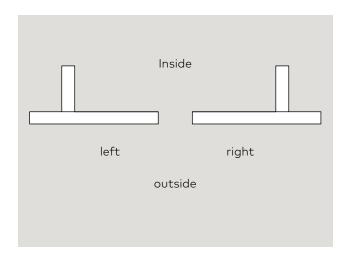



Easy to install, easy to adjust



Fast and uncomplicated fixing


MUNDUS patch fittings always fit snugly on the glass thanks to their multi-dimensional variability. They facilitate infinite adjustment of the vertical gap dimensions and location accuracy in terms of both pivot point and zero position.







Optimum gap dimensions

Thanks to the infinitely variable, multi-dimensional adjustability of the patch fittings, the door can be optimally aligned following installation.






Multi-dimensional adjustability even when mounted

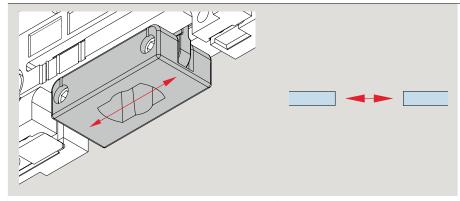


Alignment in the X axis

Individual adjustment of the pivot point, infinitely variable between 52 and 73 mm.

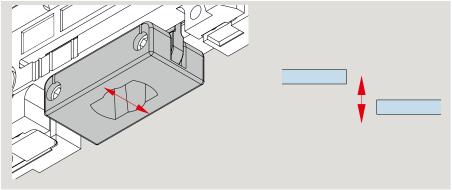

Alignment in the Z axis

Infinite variability of the door position to achieve flush alignment thanks to adjustment of up to 1 mm for a glass thickness of 8 mm, or 3 mm for a glass thickness of 12 mm.

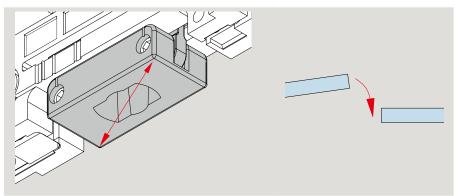

Zero position adjustment

Infinite alignment variability of the door to achieve the correct zero position by adjustment around the axis of rotation in the range +/- 1.5° .


16 Dimensions in mm. 01/20

Easy to install, safe and secure



With MUNDUS, you do not require new or additional gaskets in order to adjust the fittings to the glass thickness. With MUNDUS, the glass thickness is defined by two screws in the base unit of the patch fitting, allowing the use of glazing ranging from 8 to 22 mm.



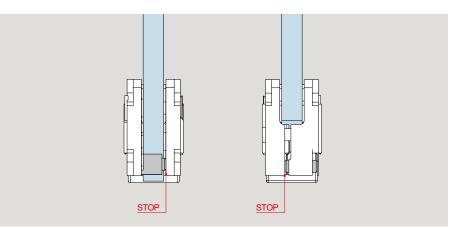

Suitable for different glass thicknesses

MUNDUS Premium:
Accommodating glass thicknesses of 8–12 mm,
12–15 mm, 15–19 mm and
19–22 mm with infinite
adjustability in a single fitting.
The gaskets that you had to separately order for toughened safety glass are now a thing of the past. You always have the right fitting to hand. That means: fast installation, more time, more design content.

Glass thickness: 8–12 mm

12–15 mm 15–19 mm 19–22 mm

Max. Door weights: 200 kg

MUNDUS Comfort:

Glass thickness: 8–12 mm Max. Door weights: 150 kg

Protection from unauthorised access

The positioning of the clamping screws also provides for additional protection against unauthorised access to your interiors. The screws are distributed on both sides of the base unit so that disassembly from one side is not possible.




Patch fittings MUNDUS




Art. No.

Glass

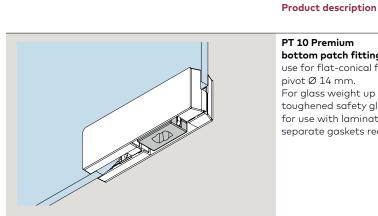

	thickness	
PT 10 Premium	8-12	42.100
bottom patch fitting	12-15	42.101
use for flat-conical floor spring spindle or round	15-19	42.102
pivot Ø 14 mm.	19-22	42.103


For glass weight up to 200 kg and use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required



PT 10 Comfort 8-12 **38.100** bottom patch fitting


use for flat-conical floor spring spindle or round pivot Ø 14 mm. For glass weight up to 150 kg and use with

For glass weight up to 150 kg and use with toughened safety glass (TSG).



PT 20 Premium	8-12	42.200
top patch fitting	12-15	42.201
with plastic socket for pivot Ø 14 mm.	15-19	42.202
For glass weight up to 200 kg and use with	19-22	42.203

toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.



PT 20 Comfort 8 –12 38.200 top patch fitting

with plastic socket for pivot Ø 14 mm. For glass weight up to 150 kg and use with toughened safety glass (TSG).


18 Dimensions in mm. 12/21

Art. No.



Glass

	thickness	
PT 22 Premium*	8-12	42.220
top patch fitting	12-15	42.221
for a glass weight up to 80 kg	15-19	42.222
with insert for transom closer RTS.	19-22	42.223
For use with toughened safety glass (TSG). Also		




PT 22 Comfort* 8–12 **38.220** top patch fitting

with insert for transom closer RTS. For use with toughened safety glass (TSG).


prepared for use with laminated safety glass

(LSG) - separate gaskets required.

Product description



PT 30 Premium overpanel patch fitting	8-12 12-15	42.300 42.301
with pivot \emptyset 14 mm and M 8 tapped hole at side.	15-19	42.302
For use with toughened safety glass (TSG). Also	19-22	42.310
prepared for use with laminated safety glass		
(LSG) – separate gaskets required.		



PT 30 Comfort 8–12 **38.300** overpanel patch fitting

with pivot \varnothing 14 mm and M 8 tapped hole at side. for use with toughened safety glass (TSG).

 $^{^{\}star}$ The maximum permissible door heights and door widths depend on the closing device used and its spring strength / closing force. The maximum allowable door weight in combination with an RTS transom-concealed door closer is 110 kg, the maximum allowable panel width is 1100 mm.

Product description




Art. No.

38.313

Glass


	thickness	
PT 30 Premium	8-15	42.303
overpanel patch fitting	15-19	42.305
with stop insert.	19-22	42.311
For use with toughened safety glass (TSG).		



PT 30 Comfort 8–15 **38.303** overpanel patch


with stop insert. For use with toughened safety glass (TSG).

Also prepared for use with laminated safety glass (LSG) – separate gaskets required.




PT 30 Premium 8-15 42.306 overpanel patch fitting 15-19 42.308 with blanking insert. 19-22 42.312

For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.



PT 30 Comfort 8–15 **38.306** overpanel patch

with blanking insert.
For use with toughened safety glass (TSG).



Fixing plate

for MUNDUS overpanel patch fitting PT 30 and MUNDUS overpanel strike box GK 30 Weight in kg: 0.039

Only available in satinized stainless steel, polished stainless steel or powder-coated stainless steel. Optionally wall anchor and threaded rod are applicable. (see page 31.)

20 Dimensions in mm. 12/18

Art. No.


38.400



Glass

8-15

38.403




ThicknessPT 40 Premium8-1242.400patch for overpanel and sidelight12-1542.401with pivot Ø 14 mm.15-1942.402For use with toughened safety glass (TSG).19-2242.470Also prepared for use with laminated safety

Please note:

Product description

The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.

glass (LSG) – separate gaskets required.




PT 40 Comfort 8-12 patch for overpanel and sidelight

with pivot Ø 14 mm.
For use with toughened safety glass (TSG).

Please note:

The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.




PT 40 Premium	8-15	42.403
patch for overpanel and sidelight	15-19	42.405
with stop insert.	19-22	42.471

For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.

Please note

The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.



PT 40 Comfort patch for overpanel and sidelight

with stop insert.
For use with toughened safety glass (TSG).

Please note

The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.



Art. No.

38.406

Glass

	thickness	
PT 40 Premium	8-15	42.406
patch for overpanel and sidelight	15-19	42.408
with blanking insert.	19-22	42.409


DIN

For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.

Please note:

Product description

The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.




PT 40 Comfort 8-15 patch for overpanel and sidelight

with blanking insert.
For use with toughened safety glass (TSG).

Please note:

The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.



PT 41 Premium
patch for overpanel
and sidelight
with pivot pin
Ø 14 mm and fin
fitting*. For use
with toughened
safety glass (TSG).
Also prepared for
use with laminated
safety glass (LSG) –
separate gaskets
required.

with pivot pin	left	8-12 12-15 15-19 19-22	42.410 42.411 42.412 42.472
	right	8-12 12-15 15-19 19-22	42.420 42.421 42.422 42.474
with stop insert	left	8-15 15-19 19-22	42.413 42.415 42.473
	right	8-15 15-19 19-22	42.423 42.425 42.475
with blanking insert	left	8-15 15-19 19-22	42.416 42.418 42.419
	right	8-15 15-19 19-22	42.426 42.428 42.429

Please note:

The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.

22 Dimensions in mm. 12/18

^{*} Left hand fin (illustration shows left hand) / right hand fin. Left or right hand are determined by view from outside.



(219)
(52)
12
left .

Product description		DIN	Glass thickness	Art. No.
PT 41 Comfort	with	left	8-12	38.410
patch for overpanel and sidelight	pivot pin	right	8-12	38.420
with pivot pin	with	left	8-15	38.413
Ø 14 mm and fin fitting*. For use with toughened	stop insert	right	8-15	38.423
safety glass (TSG).	with blanking insert	left right	8-15 8-15	38.416 38.426

Please note:

The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.

* Left hand fin (illustration shows left hand) / right hand fin. Left or right hand are determined by view from outside.

Connector patches



Art. No.


Glass

Shown with 10 mm glass. When used with other glass thicknesses, the measurements change accordingly.

Product description
PT 60 Premium connector for double and single-action doors with 1 stop insert and 2 blanking inserts. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required. Please note: The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.

thickness Γ 60 Premium connector 8-15 42.600 or double and single-action doors 15-19 42.602 ith 1 stop insert and 2 blanking inserts. 19-22 42.603

lease note:



PT 60 Comfort connector

for double and single-action doors with 1 stop insert and 2 blanking inserts. For use with toughened safety glass (TSG).

Please note:

The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.


8-15 38.600

Art. No.

42.700 42.702 42.703



Product description	Glass thickness
PT 70 Premium overpanel connector with 2 stop inserts and 2 blanking inserts. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.	8-15 15-19 19-22



PT 70 Comfort 8-15 **38.700** overpanel connector

with 2 stop inserts and 2 blanking inserts. For use with toughened safety glass (TSG).

Locks and strike boxes



Shown with 10 mm glass. When used with other glass thicknesses, the measurements change accordingly.

Product description	Glass thickness	Art. No.
US 10 Premium corner lock prepared for Euro profile cylinder, single throw, bolt projection 20 mm, with security rosettes on both sides 14 mm thick, for use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required. With the order please indicate the exact glass thickness! Lock insert: maximum corrosion resistance according to EN 1670, class 4 with regard to type test according to EN 12209:2003*	8-18.9 19-22	42.510 42.517
prepared for round cylinders (Swiss profile round cylinder 22 mm) for use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required. With the order please indicate the exact glass thickness!	8-18.9 19-22	42.513 42.516
US 10 Comfort corner lock for use with toughened safety glass (TSG) round cylinders, for use with toughened safety glass (TSG) With the order please indicate the exact glass thickness!	8-18.9	38.513
US 20 Premium center lock prepared for Euro profile cylinder, single throw, bolt projection 20 mm, with security rosettes 14 mm thick, for use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required. With the order please indicate the exact glass thickness! Lock insert: • maximum corrosion resistance according to EN 1670, class 4 • with regard to type test according to EN 12209:2003*	8-18.9 19-22	42.520 42.518
prepared for round cylinders (Swiss profile round cylinder 22 mm) for use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required. With the order please indicate the exact glass thickness!	8-18.9 19-22	42.523 42.519

26 Dimensions in mm. 12/21



8-12

8-12


38.526

38.530

19 255 252 252 252 252 252 252 252 252 25	

Product description	Glass thickness	Art. No.
US 20 Comfort center lock for use with toughened safety glass (TSG)	8-18.9	38.520
round cylinder, for use with toughened safety glass (TSG) With the order please indicate the exact glass thickness!	8-18.9	38.523
* Successful type testing according to EN 12209;2003 to 200000 movement cycles.		


MUNDUS



GK 30 Premium
8-15
42.530
single overpanel strike box
15-19
42.532
with tapped hole at side.
Suitable for corner lock US 10.
For use with toughened safety glass (TSG).
Also prepared for use with laminated safety

To install correctly, you will need to use either a screw-on fixing bracket, a wall anchor or a threaded rod fixing, see page 31.


glass (LSG) - separate gaskets required.




GK 30 Comfort single overpanel strike box

with tapped hole at side. Suitable for corner lock US 10. For use with toughened safety glass (TSG).

To install correctly, you will need to use either a screw-on fixing bracket, a wall anchor or a threaded rod fixing, see page 31.



GK 20 Premium double overpanel strike box Suitable for corner lock US 10 consisting of two GK 30 with threaded connecting bolt. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.	8-15 15-19 19-22	42.526 42.528 42.529



GK 20 Comfort double overpanel strike box

Suitable for corner lock US 10 consisting of two GK 30 with threaded connecting bolt. For use with toughened safety glass (TSG).



Art. No.

38.550

Glass


thickness GK 40 Premium 8-15 42.540 corner overpanel strike box 15-19 42.542 Suitable for corner lock US 10. 19-22 42.547

Please note:

Product description

The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.

For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.




GK 40 Premium 8-12 **38.540**

corner overpanel strike box

Suitable for corner lock US 10. For use with toughened safety glass (TSG).

Please note:


The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.



GK 50 Premium strike box 8–19 **42.550** Suitable for center lock US 20. 19–22 **42.553**

For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.

With the order please indicate the exact glass thickness!



GK 50 Comfort strike box 8-19

Suitable for center lock US 20. For use with toughened safety glass (TSG).


With the order please indicate the exact glass thickness!

28 Dimensions in mm. 12/18

Installation details (in contrast to UNIVERSAL)

Advisory: Please note that the upper pivots for MUNDUS and those for UNIVERSAL are not mutually compatible. The spigot diameters of the MUNDUS fittings vary.



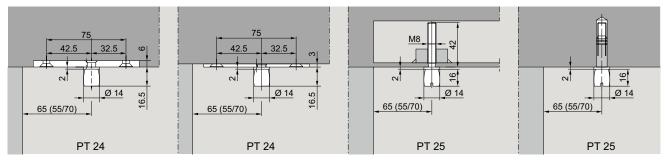


PT 21

PT 20

PT 20

Fixing of top pivots and top centers for

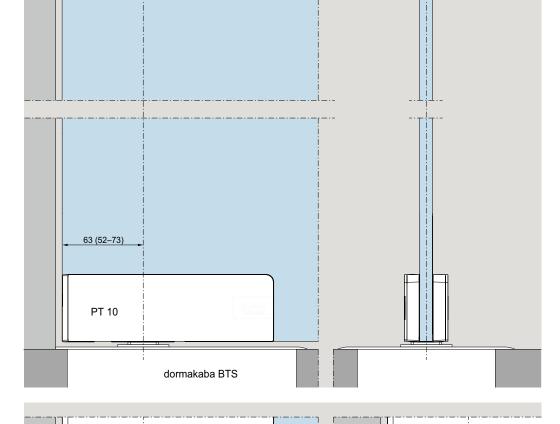

01.106

Fixing of floor springs, pivot bearings for PT 10.

Top bearing, pivots for MUNDUS



Advisory: Please note that the upper pivots for MUNDUS and those for UNIVERSAL are not mutually compatible. The spigot diameters of the MUNDUS fittings vary.

Product description Art. No. **MUNDUS PT 21 frame** 38.210 portion top centre with removable pin Weight in kg: 0.335 Ø14 14 mm Ø **MUNDUS PT 21 frame** 38.211 portion top centre with removable pin, with cover plate Weight in kg: 0.345 14 mm Ø 165 MUNDUS PT 24 pivot 38.240 with fixing plate, material thickness 6 mm, 100 to let into ceiling Weight in kg: Ø 14 Aluminum 0.058 14 mm Ø MUNDUS PT 24 pivot 38.241 with fixing plate, material thickness 3 mm, to screw on the ceiling Weight in kg: 0.042 Aluminum 0.074 Stainless steel 14 mm Ø MUNDUS PT 25 pivot 38.250 with plug Weight in kg: 0.044

30 Dimensions in mm. 05/18


14 mm Ø

Wall connection for MUNDUS



Product description

Art. No.




Fixing plate

38.313

for overpanel patch fitting PT 30 and overpanel strike box GK 30

Weight in kg: 0.041

Not available in brass or aluminum.




Wall anchor

01.133

with thread M 8 for overpanel patch

Weight in kg: 0.040



Threaded rod

01.134

M 8 with plug for overpanel patch $\,$

Weight in kg: 0.032

Floor bearing, lock keeper plate, floor socket for MUNDUS



Product description

Art. No. 01.106


01.107

04.603

05.190

05.192

05.193




Floor pivot bearing

with round pivot 14 mm Ø, and cover plate; height adjustable by 5 mm max. door weight 100 kg

Weight in kg:

Aluminum 0.155 0.170 Brass Stainless steel 0.169




Floor pivot bearing

with round pivot 14 mm \varnothing and pin 24 mm \varnothing

max. door weight 100 kg

0.078 Weight in kg:




Floor bearing

04.602

with profile spindle (longer spindle on request), max. door weight 200 kg

Stainless steel, max. door weight 200 kg


Weight in kg: 0.254



Lock keeper plate,

stainless steel, two parts, adjustable ± 5 mm

Weight in kg: 0.048



Floor socket,

zinc coated brass for lock bolt

Weight in kg: 0.020

Floor socket, aluminum, with spring and plastic stopper,

dirt protection

Weight in kg: 0.026

05.194 Eccentric socket, eccentric, zinc coated brass,

with adjustable plastic socket insert

Weight in kg: 0.020

32 Dimensions in mm. 12/20

Accessories for use with laminated safety glass




	Product description	Art. No.
5	MUNDUS Premium LSG gaskets PT 10/20/30/GK 30 LSG glue 07.631 is needed	42.951
	MUNDUS Premium LSG gaskets PT 40 LSG glue 07.631 is needed	42.952
00 00	MUNDUS Premium LSG gaskets PT 60 LSG glue 07.631 is needed	42.953
60	MUNDUS Premium LSG gaskets PT 70 LSG glue 07.631 is needed	42.954
	MUNDUS Premium LSG gaskets US 10/20/GK 50 LSG glue 07.631 is needed	42.955
	Glue and nozzle for LSG	07.631

Glass preparation patch fittings




161 148 68

PT 10, PT 20, PT 22, PT 30 Top and bottom patches, overpanel patch

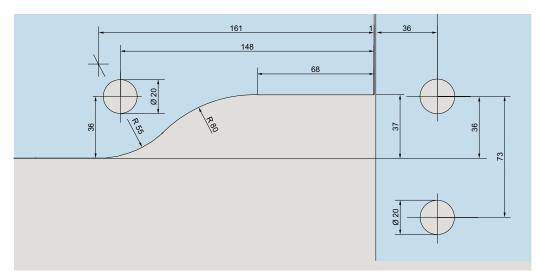


PT 40 Patch for overpanel and sidelight

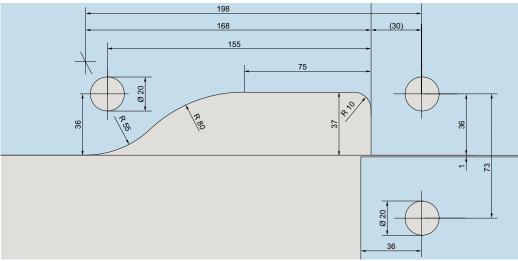


PT 40Angle patch fitting with continuous overpanel

34 Dimensions in mm. 11/17




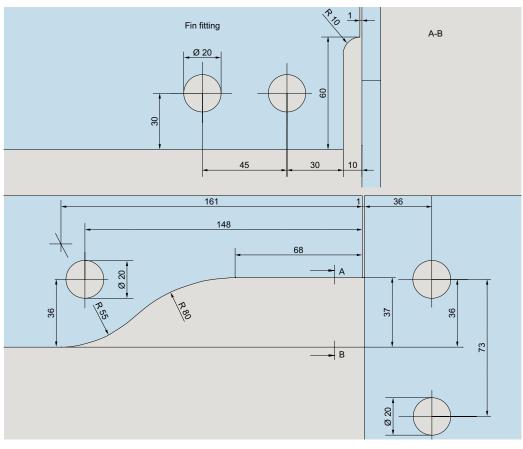

PT 41
Patch for
overpanel and
sidelight with
fin fitting inside

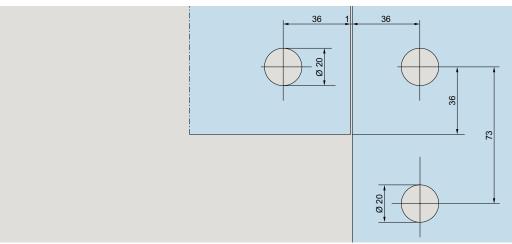


PT 60Connectors
for overpanels
and sidelights

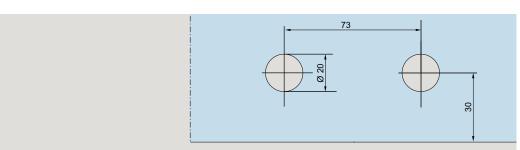

PT 70Overpanel connector



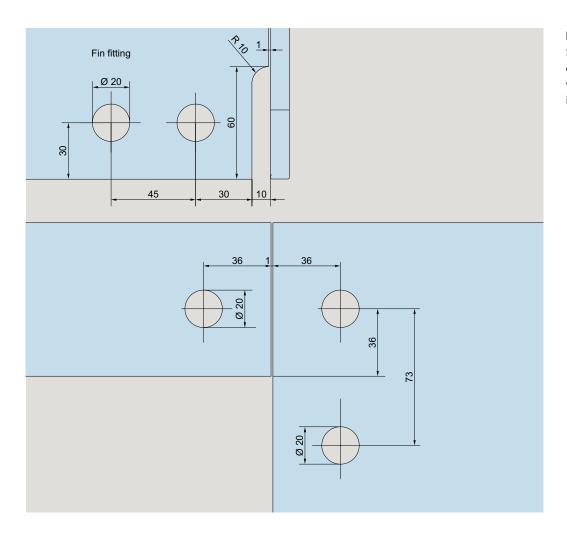


PT 61Single overpanel connector with fin fitting inside

Glass preparation locks and strike boxes




US 10


Corner locks

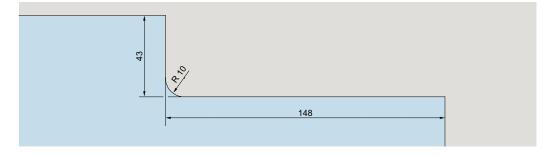


GK 30 (PT 30)

Single overpanel strike box

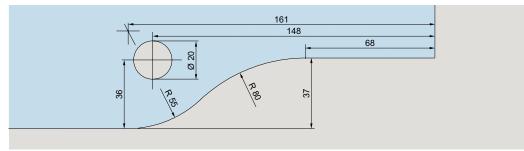

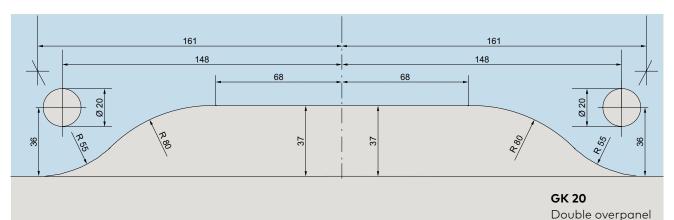

strike box

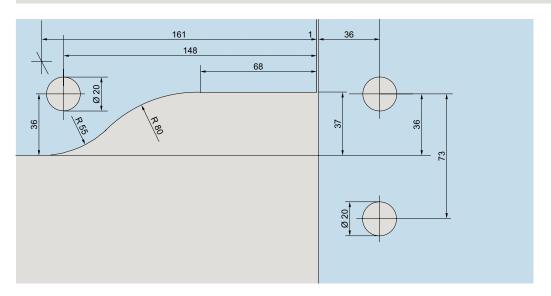


GK 40 (PT 40)


Corner overpanel strike box



Product description

US 20, GK 50



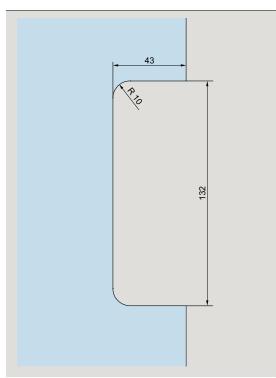

38 01/20

MUNDUS Accessories

Space for your notes

ContentUNIVERSAL

- 42 General information
- 44 Type illustration
- 48 Components
- 60 Glass preparation
- 70 Installation details
- 204 Accessories
- 226 Safety-related information



UNIVERSAL

UNIVERSAL ... as the name says


With its broad spectrum of basic types and variants, the UNIVERSAL range of patch fittings enables the realisation in toughened glass of almost any conceivable design. Toughened glass assemblies can be provided with fixed parts in widely differing arrangements – with corner fittings or fin fittings at different angles, and with double or single-action doors in single-leaf or double-leaf designs.

Easy glass preparation, secure fixing

DORMA-Glas has an intimate knowledge of the special properties of glass as a building material. This has led to the design of fittings requiring only minimal glass preparation – a quick and easy cut-out with additional holes. Carefully considered and positive measures have been taken to create the maximum clamping surface with optimum clamping efficiency.

Suitable for common glass thicknesses

UNIVERSAL fittings are supplied as standard with gasket to suit 10 mm glass (TSG). For 8 mm and 12 mm glass, correspondingly thicker and thinner gasket is available. Some patches are even designed to fit directly with different glass thicknesses.

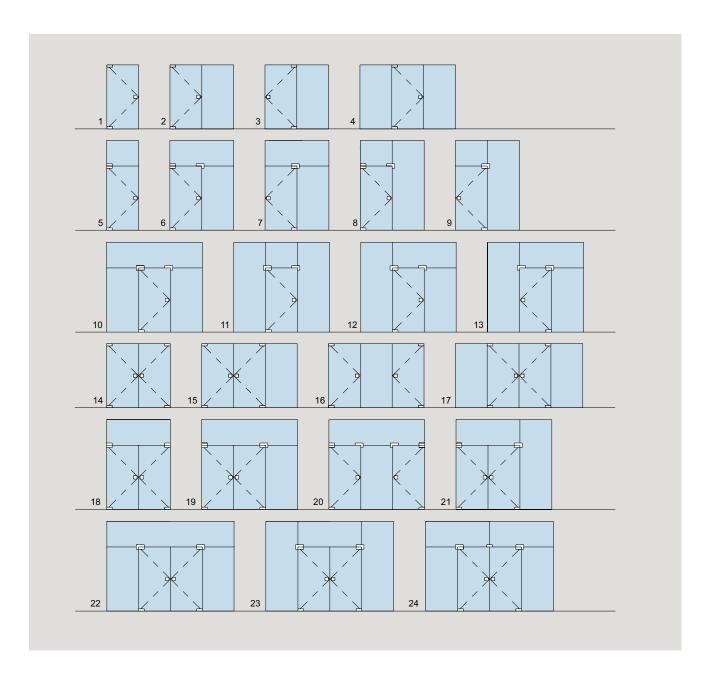

42 12/20

Variable pivot point

The inserts for corner and overpanel patches in the UNIVERSAL program have been designed and manufactured to give two options in the pivot point distance from the sidepanel or frame. It can be either 55 mm or 65 mm. At 65 mm pivot point and the use of a special round profile (page 148) doors can be built with a constant air gap of only 4 mm.

Reliability built in

Quality materials and thorough workmanship mean that UNIVERSAL fittings have the features necessary to meet the most demanding of specifications. The fittings are designed to cope with large and heavy doors up to a maximum weight of 110 kgs: for instance, a door blade 3000 mm high by 1100 mm wide, using 12 mm glass is quite possible. Please contact our Application Engineering department for more information. For heavier and wider doors up to a maximum of 150 kg and max. 1400 mm and for high frequented doors, rails with reinforced straps are available.

Matching range of locks


The UNIVERSAL range includes every type of accessory, and of course, a variety of locks and strike boxes in a matching design concept, giving the designer plenty of choice from the options available.

Short delivery times

All the common patterns and types are available exstock (factory). Specials will be prepared promptly.

Type section

Toughened glass assemblies with fittings (55/65 mm pivot point) and locks.
All standard assembly types see page 42.

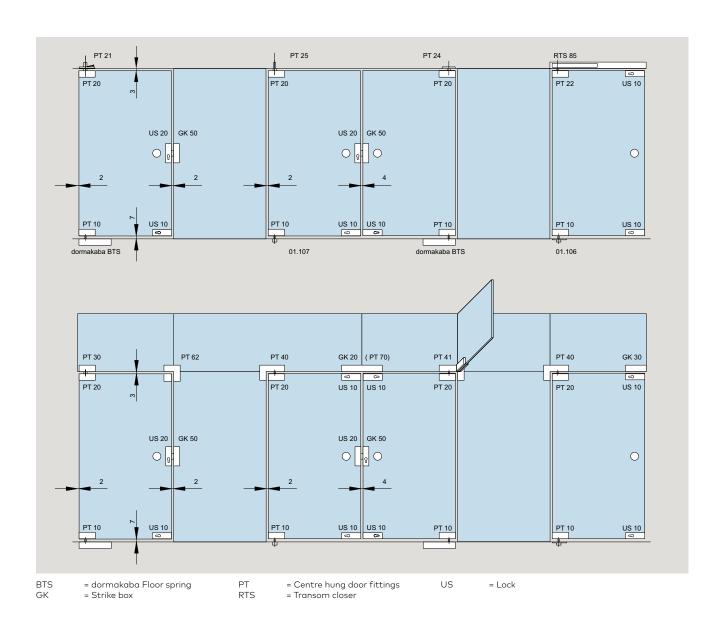

Maximum door weight and width for UNIVERSAL fittings

max. door weight: 110 kg* max. door width: 1100 mm**

For doors with higher frequency and in public areas we would advice to use a door rail for doors above 110 kg and door width larger than 1100 mm. For door weights up to 150 kg and widths up to 1400 mm door rails should be used.

* For door heights up to 2500 mm

For doors with a height of more than 2500 mm we have to keep additional conditions/limits:

- Glass thickness >/= 10 mm
- + Usage of a handle bar with 3 connection points in minimum and a minimum height of 1/2 door height

** Use of door closers:

Doors < / = 1100 mm must be provided with door closers of type EN 3 (with or without backcheck), and doors > / = 1100 mm need to be fitted with larger door closers (e.g. EN 4, 5 or 6) without backcheck.


44

Torque for fixing screws

Screws M 6: 10 Nm (4 mm)* Screws M 6: 15 Nm (5 mm)* Screws M 8: 20 Nm (5 mm)* *Allan key size

Please note If angle fittings or fin fittings are used:

"Left" or "Right" have to be determined in any case by view from outside and above.

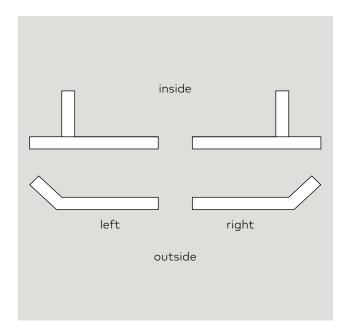

UNIVERSAL Motion NG33 – the self-closing patch fitting

A patch fitting with hydraulic self-closing function is not just convenient but also efficient: The hydraulic technology proves its advantage without requiring a power supply and any visible mechanism. UNIVERSAL Motion is like a reliable employee with intrinsic values: the space-saving technology is integrated in the compact bottom patch fitting and does not require any additional installation space.

Eight reasons for the one.

- **Completely smart.** In UNIVERSAL Motion NG33, the door closing function is integrated in a compact, well-shaped unit. A subtly functional design.
- Almost invisible. What looks like a patch fitting manages the closing of doors by itself. An additional floor spring is not required.
- **Clear savings.** Less effort and cost-efficient. You need only two fittings for the self-closing swing door: UNIVERSAL Motion NG33 and PT 20.
- Comfortable function. The door closes softly by itself. The hydraulic door movement is achieved simply in the fitting without extra installation, without power supply.
- **Simple installation.** UNIVERSAL Motion NG33 consists of very few parts. The glass door is clamped in the fitting. No prior changes to the floor are required.
- For the existing building. Retrofitting is clearly simpler than before. The floor need not be sawn nor milled beforehand.
- **Simple positioning.** The material and composition of the floor are not critical factors. You need to place only four vertical bores for the bottom pivot bearing.
- Individual colour design. Based on the stainless steel surface and using our own powder coating facility, the DORMA-Glas colour palette creates systematic diversity. The colour spectrum corresponds to the standard UNIVERSAL fittings. Individual colour design according to RAL is also possible. Simply matching the contemporary interior.



Technical features:

Glass thickness: 10 + 12 mm ESG
Door width: max. 1000 mm*
Door height: max. 3000 mm
Door weight: max. 100 kg

Pivot point: 65 mm

The screw depth in the bottom of the supplied screws for the floor pivot bearing is 30 mm.

Available in the surface variants stainless steel and the product variants with 90 degree hold-open (Tolerance window: +/- 3 degrees) and without hold-open.

UNIVERSAL Motion NG33 is intended for indoor use. The fitting is not suitable for outdoor applications and for doors in high-frequency areas / public buildings.

UNIVERSAL Motion NG33 is tested by DORMA-Glas according to DIN EN 1191:2013 for 200000 test cycles.

Technical notes:

The 90-degree detection has a tolerance range of +/- 3 degrees due to the manufacturing process.


The self-closing function of the fitting takes place between 4 degrees and 70 degrees opening angle of the door.

Due to insufficient pressure equalisation within the rooms, the door can lose its zero position when closed, caused by pressure or suction loads. This is due to the environment or external influences and does not represent a product defect. All spring-supported and hydraulic closing devices are affected. The problem can only be mitigated or avoided by creating significantly larger and stronger floor springs (e.g. dormakaba BTS 80) can be used (depending on the wind loads).

46 Dimensions in mm. 01/25

^{*} Door widths smaller than 700 mm can be realized from a product technical point of view. However, this is not recommended, as the opening forces to be applied then lie outside the DIN 12217 standard.

You can find more details about the fittings via the numbers listed below in "The Detail".

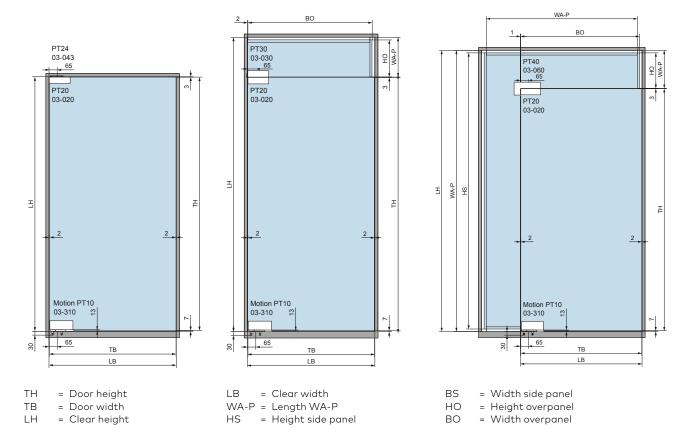

Note:

To extend the tolerance range, it is possible to increase the glass bore for the PT20 from ø20 to ø22.




Note:

Please note the modified glass processing UNIVERSAL Motion NG33 from May 2022 on page 60!

Patch fittings UNIVERSAL

Shown with 10 mm glass. From 12 mm glass the measurements change accordingly.
Accessories see page 204 and following.




Product description	Glass thickness	Art. No.
PT 10 UNIVERSAL	10	*03.100
Bottom patch	13 - 19	03.280

with insert for floor spring spindle, or round pivot 14 mm \varnothing

With the order please indicate the exact glass thickness!

Weight in kg:

Aluminum 0.564 Brass 0.680 Stainless steel 0.662



Floor pivot bearing 10 **01.137**


for damp environments, with insert for PT 10 UNIVERSAL (not suitable for MUNDUS PT10)

without floor recess,

max. door weight 80 kg

Weight in kg: 0.195

Only for UNIVERSAL applications, not suitable for MUNDUS.




PT 20 UNIVERSAL 10 *03.110 Top patch 13 - 19 03.281

with plastic socket for top pivot 15 mm \varnothing

With the order please indicate the exact glass thickness!

Weight in kg:

Aluminum 0.477 Brass 0.593 Stainless steel 0.575



PT 22 UNIVERSAL 10 03.112 Top patch


with insert for RTS transom closer

Weight in kg:

Aluminum 0.578 Brass 0.695 Stainless steel 0.677

48 Dimensions in mm. 12/21

 $^{^{\}ast}$ Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 212.



Product description	Glass thickness	Art. No.
77.00 / N.W. (77.00 / 1		
PT 29 UNIVERSAL	1()	03.114

UNIVERSAL


Top patch

with pivot fixing plate, to countersink into ceiling (pivot point = 55 mm)

max. door width: 1000 mm max. door weight: 70 kg

Weight in kg:

Aluminum 0.544 Brass 0.692




PT 30 UNIVERSAL 10 *03.120 Overpanel patch 13 - 19 03.282

with pivot 15 mm \emptyset , with M8 tapped hole at the side

With the order please indicate the exact glass thickness!

Weight in kg:

Aluminum 0.528 Brass 0.654 Stainless steel 0.636




PT 30 UNIVERSAL	10	*03.420
Overpanel patch	13 - 19	03.482

with stop insert

With the order please indicate the exact glass thickness!

Weight in kg:

Aluminum 0.528 Brass 0.654 Stainless steel 0.580



PT 30 UNIVERSAL 10 *03.421 Overpanel patch 13 - 19 03.484 with blank insert not illustrated


With the order please indicate the exact glass thickness!

Weight in kg:

Aluminum 0.519 Brass 0.645 Stainless steel 0.571

 $^{^{\}star}$ Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 212.






Weight in kg:

0.016 Aluminum Brass 0.038


Stainless steel not available, satin chrome on brass supplied.



Wall anchor 01.133

with thread M 8 for overpanel patch PT 30

0.040 Weight in kg:




01.134 Threaded rod

M 8 with plug

for overpanel patch PT 30

0.032 Weight in kg:




PT 51 UNIVERSAL 10 03.160

Double overpanel fitting

with fin fitting on one side and 2 pins 15 mm diameter Usable for glass thicknesses up to 12 mm. If thicker glasses are required, please talk to our Application Engineering people.

Weight in kg:

Aluminum 1.299 Stainless steel 1.576



PT 40 UNIVERSAL 10 *03.140 Patch for overpanel and sidelight 13 - 19 03.283 with pivot 15 mm \varnothing not illustrated

With the order please indicate the exact glass thickness!


Weight in kg:

Aluminum 0.755 Brass 0.958 0.937 Stainless steel

01/20 50 Dimensions in mm.

^{*} Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 212.

Art. No.



		thickness	
Ī	PT 40 UNIVERSAL	10	*03.440
	Patch for overpanel and sidelight	13 - 19	03.483
	with stop insort		not illustrated


Glass

With the order please indicate the exact glass thickness!

Weight in kg:

Product description

Aluminum 0.755 0.958 Brass Stainless steel 0.937




PT 40 UNIVERSAL	10	*03.441
Patch for overpanel and sidelight	13 - 19	03.485
with blank insert		not illustrated

With the order please indicate the exact glass thickness!

Weight in kg:

Aluminum 0.746 Brass 0.949 Stainless steel 0.928




PT 41 UNIVERSAL	10	**03.162/
Patch for overpanel and sidelight		03.163
with fin fitting inside, with pivot 15 mm \varnothing		

PT 41 UNIVERSAL 10 **03.262/ 03.263 Patch for overpanels and sidelight with stop insert not illustrated

Weight in kg:

0.952 Aluminum 1.197 Stainless steel



PT 41 UNIVERSAL 10 03.161 Patch for overpanels and sidelight

with fin fitting on both sides, with pivot 15 mm Ø

Weight in kg:

1.149 Aluminum Stainless steel 1.457

 ^{*} Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 212.
 ** Left hand fin (illustration shows left hand) / right hand fin.

Left or right hand are determined by view from outside.

Ø15 55/65

Product description


Glass thickness Art. No.

PT 42 UNIVERSAL

Overpanel patch for single action doors

with angled connector inside, pivot 15 mm, angle 90°

**03.164/ 03.165



PT 60/61 UNIVERSAL

Connector

10 *03.150 13 - 19 03.452 not illustrated

for overpanel and sidelight, for double or single action doors with one stop insert and two blank inserts, also suitable for 12 mm glass thickness.


With the order please indicate the exact glass thickness!

Weight in kg:

Aluminum

0.343 0.461

Brass Stainless steel 0.436



PT 62 UNIVERSAL

Connector


for overpanel and sidelight, with stop

Weight in kg:

Aluminum

0.475

Stainless steel 0.670



PT 70 UNIVERSAL

Overpanel connector

13 - 19

*01.150 01.158

not illustrated

03.173

with two stop inserts and two blank inserts,

also suitable for 12 mm glass thickness

With the order please indicate the exact glass thickness!

Weight in kg:

Aluminum 0.272

Stainless steel 0.335

- $^{\star}~$ Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness.
- These are available on page 212.

 ** Left hand fin (illustration shows left hand) / right hand fin. Left or right hand are determined by view from outside.

52


Product description Glass Art. No. thickness

Overpanel-sidelight connector

12.536

Weight in kg:

Aluminum 0.146




PT 71 UNIVERSAL 01.161 Overpanel connector

with fin fitting

Weight in kg:

Aluminum 0.458

Stainless steel 0.608



PT 80 UNIVERSAL *03.170 Connector


With the order please indicate the exact glass thickness!

13 - 19 03.472 not illustrated

Weight in kg:

Aluminum 0.555

Stainless steel 0.780



PT 81 UNIVERSAL 03.175


Connector

with fin fitting

Weight in kg:

0.784 Aluminum Stainless steel 1.065

^{*} Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 212.

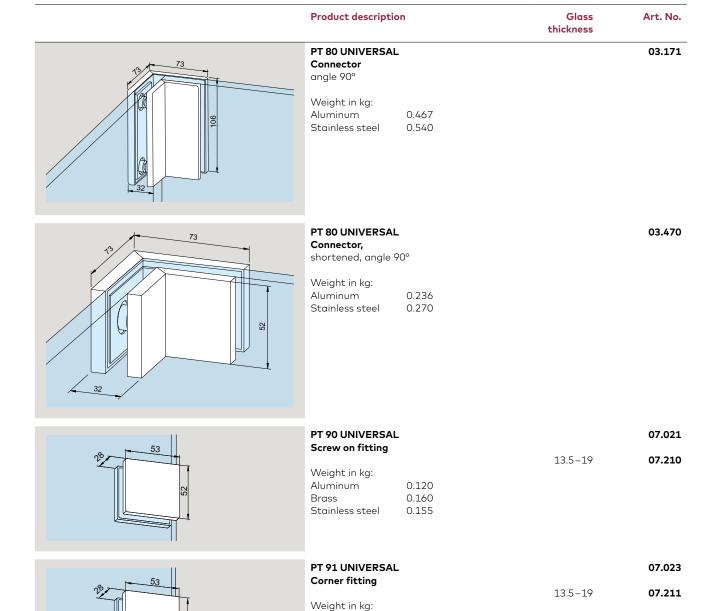

Aluminum

Stainless steel

Brass

0.120

0.160

0.155

54


 $^{^{\}ast}$ Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 212.

03.172

03.380

03.382

03.383



Glass **Product description** Art. No. thickness


PT 80 UNIVERSAL Connector,

angle 135°

Weight in kg:

Aluminum

0.472 Stainless steel 0.541



10, 12 01.153 Side connector

with fixing plate

Also suitable for 8 mm glass thickness.

Weight in kg:

Aluminum 0.313 Stainless steel 0.376

Gasket 01.900 not illustrated

Please indicate glass thickness and Art. No. 12 01.901

of fitting.



for pinch free doors with 65 mm pivot point, consisting of 2 halves, prepared for UNIVERSAL fittings or door rails (76.5 mm or 100 mm).

Please indicate:

• Panel height (max. 2500 mm, higher dimension on request)

· Required preparation of the profile for top and bottom fittings



03.381

as above, stock lenght 6000 mm (unprepared)

Aluminum round profile,

as above, stock lenght 3000 mm


(unprepared)

Aluminum round profile,

as above, stock lenght 2800 mm (unprepared)

Weight in kg/m:

4.744 Aluminum

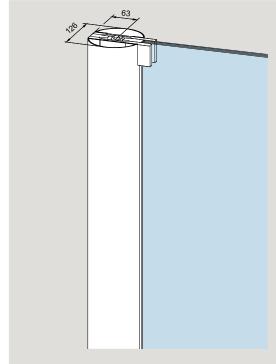


Locks, complete for 10 mm glass thickness


Shown with 10 mm glass. When used with other glass thicknesses, the measurements change accordingly.

Product description Glass Art. No. thickness **US 10 UNIVERSAL** 03.206 corner lock, 13, 15, 19 03.285 prepared for Europrofile cylinder, single throw, bolt projection 20 mm, with security rosettes on both sides, 14 mm thick. Lock insert: · high corrosion resistance according to EN 1670, class 4 • with regard to type-test according to EN 12209:2003** With the order please indicate the exact glass thickness! 03.340 prepared for round cylinder For half profile cylinder 03.288 Left hand top/ right hand bottom Left hand bottom/right hand top 03.287 Weight in kg: Aluminum 0.942 1.061 Brass Stainless steel 1.053 Lock keeper plate, stainless steel, 05.190 two parts, adjustable ± 5 mm Weight in kg: Alternative (not illustrated): Floor sockets 05.192 05.193 05.194 **GK 30 UNIVERSAL** 03.230 13, 15, 19 03.295 Single overpanel strike box with threaded hole at side, not illustrated to suit US 10 corner lock With the order please indicate the exact glass thickness! Weight in kg: Aluminum 0.418 0.555 0.536 Stainless steel *03.234/03.235 GK 30 UNIVERSAL with stop not illustrated Weight in kg: Aluminum 0.463 Stainless steel 0.597

- $^{\star}\,$ Left or right hand are determined by view from outside.
- ** Successful type testing according to EN 12209:2003 to 200000 movement cycles.

56 Dimensions in mm. 01/24

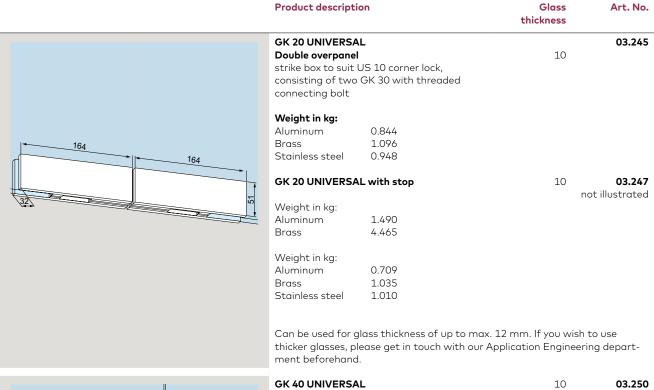



GK 40 UNIVERSAL 10 03.250 Corner overpanel strike box

to suit US 10 corner lock

GK 40 UNIVERSAL with stop


*03.254/03.255

not illustrated


Weight in kg:

Aluminum 0.754 Brass 1.035 Stainless steel 1.010

 $^{^{\}ast}$ Order of Art. No.: left hand fin / right hand fin – determined by view from outside. (Illustration shows left hand)

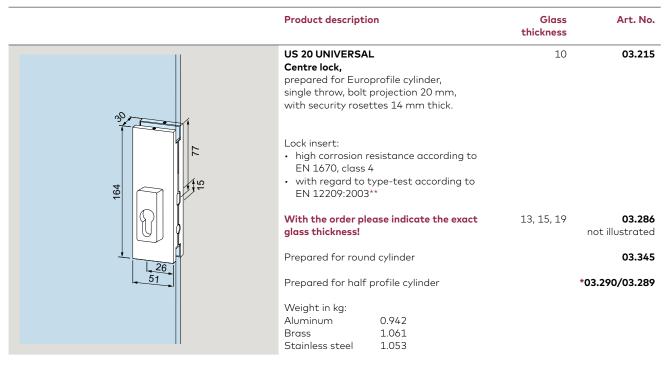

- $^{\star}\,$ DIN left / DIN right are determined by view from inside. (illustration shows left hand)
- ** Successful type testing according to EN 12209:2003 to 200000 movement cycles.



GK 50 UNIVERSAL 10 **03.224 Strike box** 13, 15, 19 **03.296**

to suit US 20 centre lock

With the order please indicate the exact glass thickness!


Weight in kg:


Aluminum 0.602 Brass 0.730 Stainless steel 0.727

58 Dimensions in mm. 01/24

Space for your notes

Glass preparation fittings

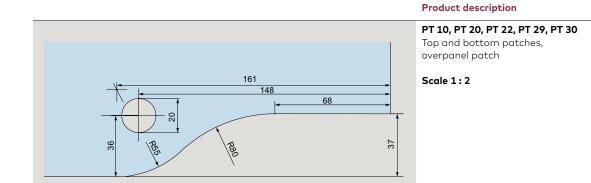

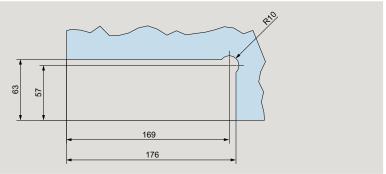

Glass preparation UNIVERSAL Motion NG33

Art. No.

03.100

03.110

03.114 03.120


03.212

03.280


03.281 03.282 03.420 03.421

Attention:

Illustration shows required glass preparation as of May 2022

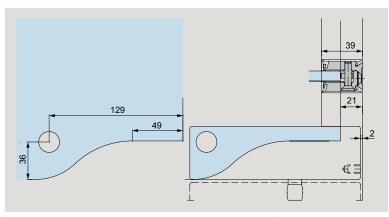


PT 30 Installation PT 30 with wall connection profile

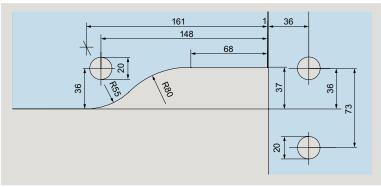

PT 40 03.140
Patch for overpanel and sidelight 03.283
03.440
Scale 1: 2 03.441

60 Dimensions in mm. 01/22

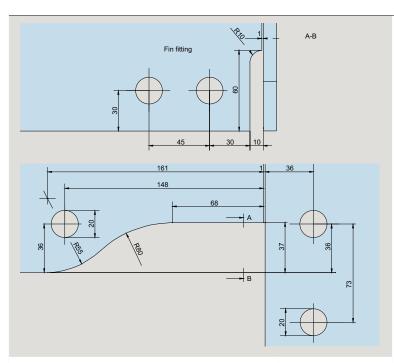

Product description

Art. No.


PT 41 Patch for overpanel and sidelight with fin fitting inside


03.162 03.163

Scale 1:2





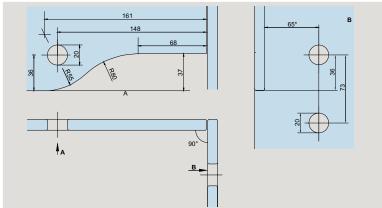

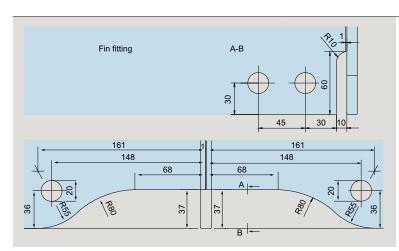

Product description


Art. No.

03.173

PT 51 03.160

Overpanel fin fitting for back to back doors

Scale 1: 2.5

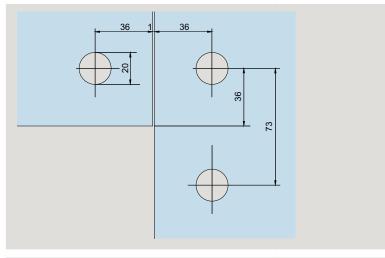


PT 60/61, PT 62 03.150

Winkelverbindung

Connectors for overpanels and sidelights

Scale 1:2

Glass preparation for fin **03.452** fitting both sides see PT 81

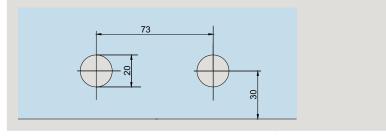

PT 70 01.150 Overpanel connector 01.158

Scale 1:2

62

Fin fitting A-B


Product description

Art. No. 01.161

PT 71

Overpanel connector with fin fitting

Scale 1:2

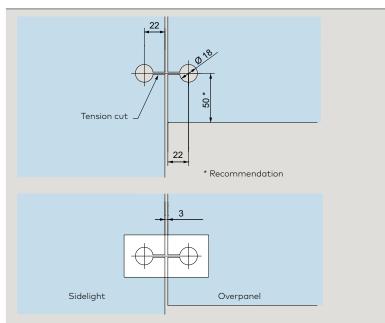

Product description


Art. No.

Overpanel-sidelight connector

12.536

Weight in kg:


Aluminum 0.146



PT 80 Connector 03.170 03.472


03.175

Scale 1:2



PT 81 Connector with fin fitting

Scale 1:2




Product description

Art. No. 03.171

PT 80 Angled connector, 90°

Scale 1:2

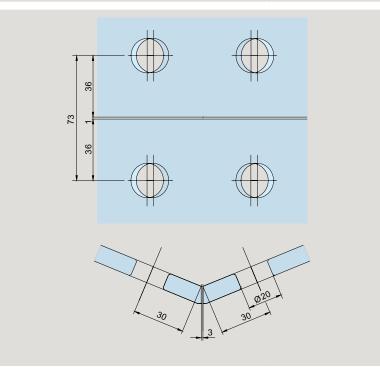

PT 80 Angled connector, 135°

03.172

Scale 1:2


PT 80 shortened Angled connector, 90° 36

Product description

Art. No.

03.470

shortened Scale 1:2

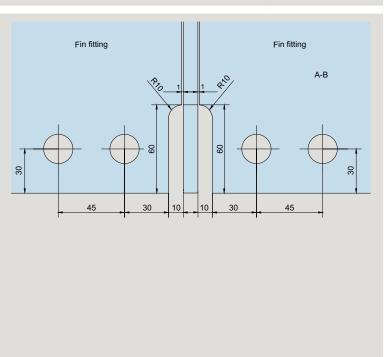


PT 41, GK 41

03.161


Patch for overpanel and sidelight with fin fitting on both sides

Scale 1:2


66 Dimensions in mm. 12/21

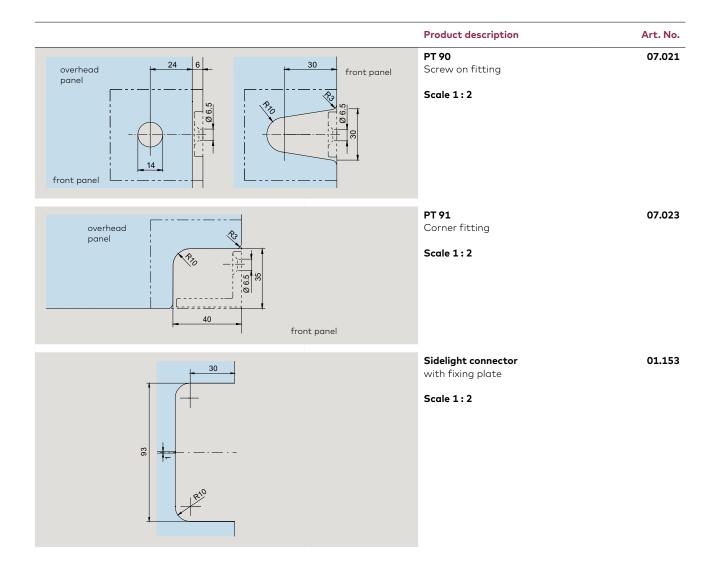

Glass preparation locks

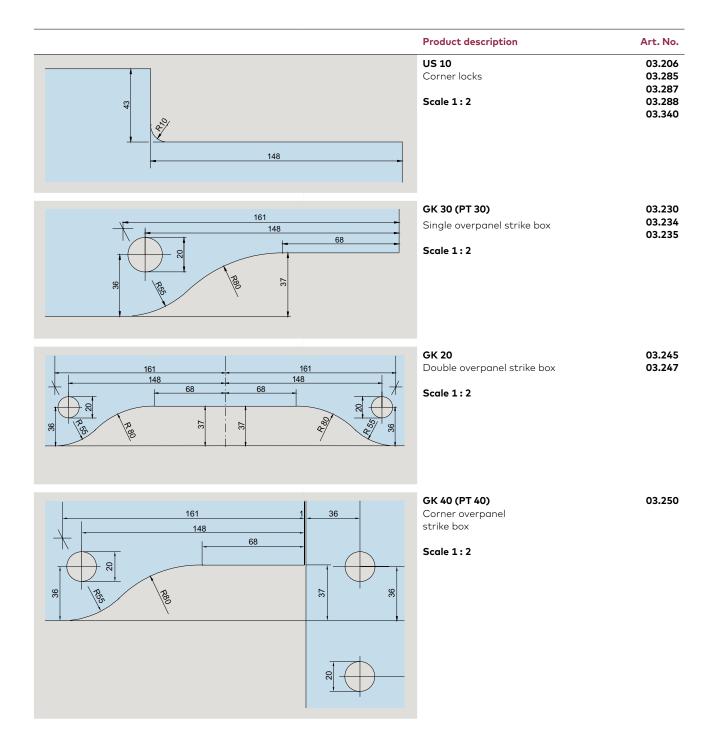



68 Dimensions in mm. 12/20

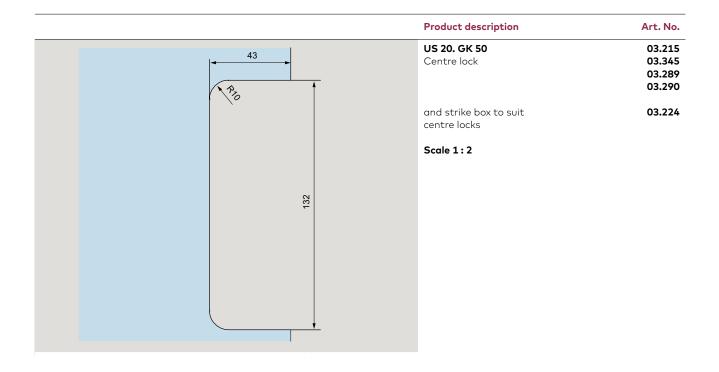

Installation details

Advisory: Please note that the upper pivots for UNIVERSAL and those for MUNDUS are not mutually compatible. The spigot diameters of the MUNDUS fittings vary..

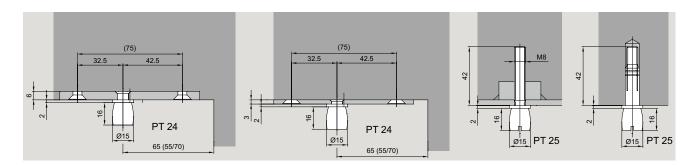

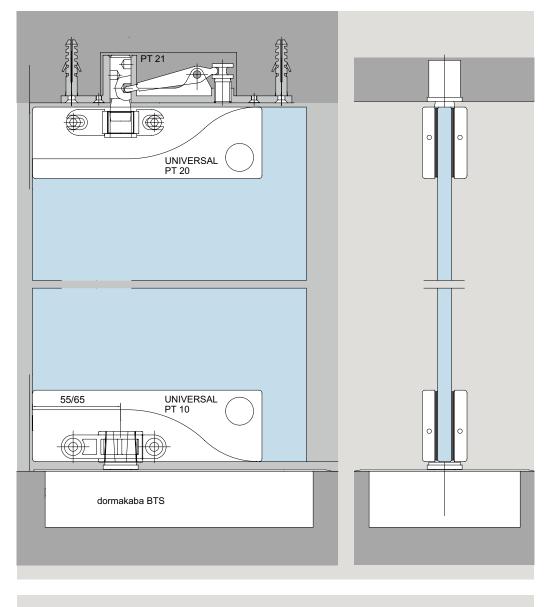

Fixing of top pivots and top centres for PT 20.

Fixing of floor springs, pivot bearings for PT 10.

01.107

01.106

Space for your notes

Content RP

74	General information
/ —	General information

- 75 Type illustrations
- 76 Components
- 204 Accessories
- 226 Safety-related information

72 12/21




RP

Marvellously concealed transom door closer

The RP pivot door system works with a tubular transom profile in which the RTS transom closer is integrated and concealed. The system is fixed on the ceiling using brackets which are concealed after system installation. A top patch fitting (UNIVERSAL PT 22) attaches the all-glass door to the closer. A bottom patch fitting (UNIVERSAL PT 10) connects the door to the floor pivot, which measures only a few centimetres. So glass thicknesses of 8 – 12 mm are feasible.

The RTS transom closer not only returns the door to the zero position each time it is opened, it also has a special dampening system to protect the door against unwanted impact caused by over-aggressive opening. In addition, the integral hold-open, which also comes as standard, enables the door to be held open at an angle of 90°.

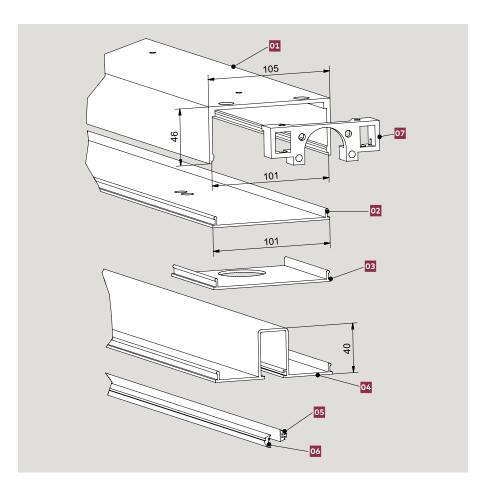

Transom tube configuration:

01

Transom tube for fixing on ceiling, as lintel or similar, max. length 6000 mm

02

Cover profile for door, clip-on, max. length 6000 mm

03

Cover profile for fixed sidelights, clip-on type with glass groove

04

Cover profile for fixed sidelights, clip-on, with glazing groove

05/06


Contact profile / glass wedge profile, depending on combination for 8, 10 or 12 mm glass thicknesses of the sidelight


07

Fixing bracket for securing transom tube and closer

74 Dimensions in mm. 05/18

Type selection

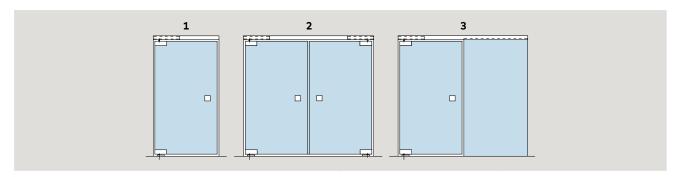

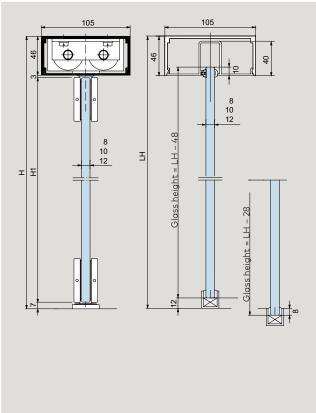

Options

- **1** Single leaf double-action door with transom tube
- 2 Pair of double-action doors with transom tube
- **3** Double-action door with through-running transom tube and fixed sidelight

Further versions up to 6000 mm are possible.

Materials and finishes

- AL anodized, EV1, sanded, matte (for profiles: stained, matte) (101)
- AL anodized, similar stainless steel, satin (for profile material) (similar Anodizing II C 31) (113)
- AL powder coated, Traffic white, smooth, glossy (sim. RAL 9016) (300)
- · AL anodized, special (199)
- AL powder coated, Special color (Standard powder according to the corresponding overview on our website. A price surcharge is possible for special colors outside the color range specified there.) (399)

Door panel dimensions

- Glass thicknesses: 8/10/12 mm
- Door height H1: H 56 mm
- For max. door panel weights and widths please see the table below.

Sidelight dimensions

- Glass thickness: 8 / 10 / 12 mm with two-part sealing profile
- Sidelight height:
 H 48 mm + floor pocket,
 where required

max. height	max. width	max. door weight (incl. fittings)	RTS version	
2500	800-1100	80 kg	RTS EN 3	
3500	max. 1250	110 kg	RTS EN 4	+

with door rails top and bottom see "The Detail" 04-030 and 04-060

If you have any questions regarding special designs with door rails, our Application Engineering department will be glad to advise you.

Also with door rails available

Double-action system for glass doors

Product description

Art. No. 01.300


Double-action system for glass doors

complete, for door width up to 1000 mm, consisting of


- 1 transom tube;
- 1 cover profile;
- 1 RTS 85 transom closer; EN3, hold open 90° (For door widths less than 800 mm, door closers of spring strength EN 2 may also be used. Please indicate requirement when ordering.)
- 1 fixing bracket;
- 1 bottom patch fitting PT 10;
- 1 top patch fitting PT 22;
- 1 floor pivot bearing

Weight in kg: 8.083

When ordering, please indicate the precise system dimensions or attach a corresponding drawing.



76

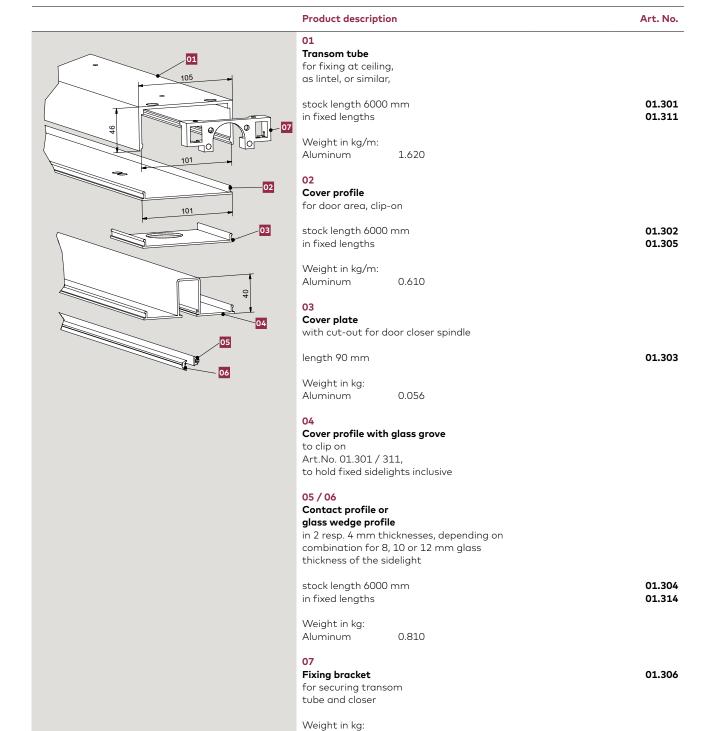

Aluminum

0.080

ContentBEYOND

()	\	
\Join	~	information
\cup	' Generai	intormation

- 82 Type illustrations / sets
- 86 Components
- 86 Glass preparation
- 204 Accessories
- 226 Safety-related information

78



BEYOND

Systematic design

Safe, functional and extremely attractive, BEYOND, the unique system for glass doors without risk of pinched fingers with swing doors.

The development of BEYOND has been shaped by the search for a solution that combines a modern, attractive design with maximum safety and stability. In the swing-door system the pivot point is located directly at the glass edge, thus preventing the risk of trapped fingers often found at the secondary closing edges of glass swing.

BEYOND opens up a huge range of opportunities for incorporating frameless glass doors into toughened glass assemblies and wall openings. The BEYOND system offers an elegant, sophisticated solution for swing doors in all situations, whether private or public, modern or traditional.

Developed with the practical requirements of the market in mind, this product offers a sensible alternative wherever security, safety and functiona-lity need to be complemented with an attractive design.





80 12/18

Safe and secure

The patented BEYOND swing door system with its pivot point located centrally in the glass axis and close to the glass edge ensures safety and security. The alternative options of elegant, continuous pivot rod or smart short rod make the system suitable for any room situation. And with a choice of pull handles or lock/lever handle combinations, BEYOND enables the realisation of your design ideas.



The over panel pivot fitting – a slim connector.



An option for the bottom pivot point – short rod on a floor pivot.

If floor pivot bearings are being used, a separate lock or a tumbler is required.

Short pivot rod

The BEYOND swing door system with short pivot rod offers maximum flexibility. No matter what the door dimensions, BEYOND short fittings provide a versatile solution.

DORMA-Glas floor pivots, or – particularly for double-action doors – dormakaba BTS floor springs, form the ideal base for ensuring that the door always returns safely and securely to its home position. Since with the BTS floor spring the position of the pivot point requires it to be buried under the adjacent wall, the use of a glass side panel is recommended in this case. The top connection depends on the type of unit. When incorporating the glass door into a toughened glass assembly, the top connection is formed by an over panel pivot fitting; in the case of doors in wall openings, a top pivot bearing is fitted to the ceiling or in the lintel.

Load transfer from the overpanel and side panel can be effected by means of wall adapter profiles.


Depending on customer requirements, BEYOND offers suitable fittings for 10 mm and 12 mm glass. Finishes for fittings and accessories:


AL anodized, EV1 Deco, satin, matte (compatible with finish 150) (114) or AL anodized, similar stainless steel, polished, matte (107).


For maximum values please see the typical assemblies.

Note:

Overpanel fitting wall connector max. 1200 mm door width; overpanel fitting glass connector max. 1000 mm door width.







Basic set for individual door.

For installation in masonry. Optionally with side panel on closing side.

Max door height 3000 mm Max door weight 80 kg


Basic set and over panel fitting wall connector for door with over panel.

Optionally with side panel on closing side.

Max door height 3000 mm Max door weight 80 kg Basic set and over panel fitting wall connector for door with over panel and side panel on pivot point side.

Optionally with side panel on closing side.


Max door height 2200 mm Max door weight 80 kg

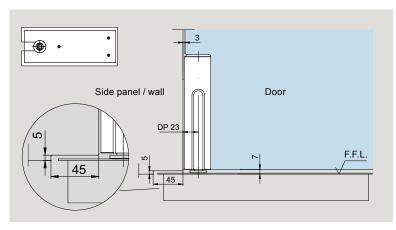

Combination BEYOND and dormakaba BTS

(door closer available from Door Control Division) With the dormakaba BTS floor spring, the position of the pivot point means that the unit has to be buried under the adjacent wall, or that the glass side screen has to be appropriately machined (see adjacent detail). The height of the recess cut into the glass will need to be adapted to the installation situation and the means by which the side screen is fixed.

Fittings and glass connector

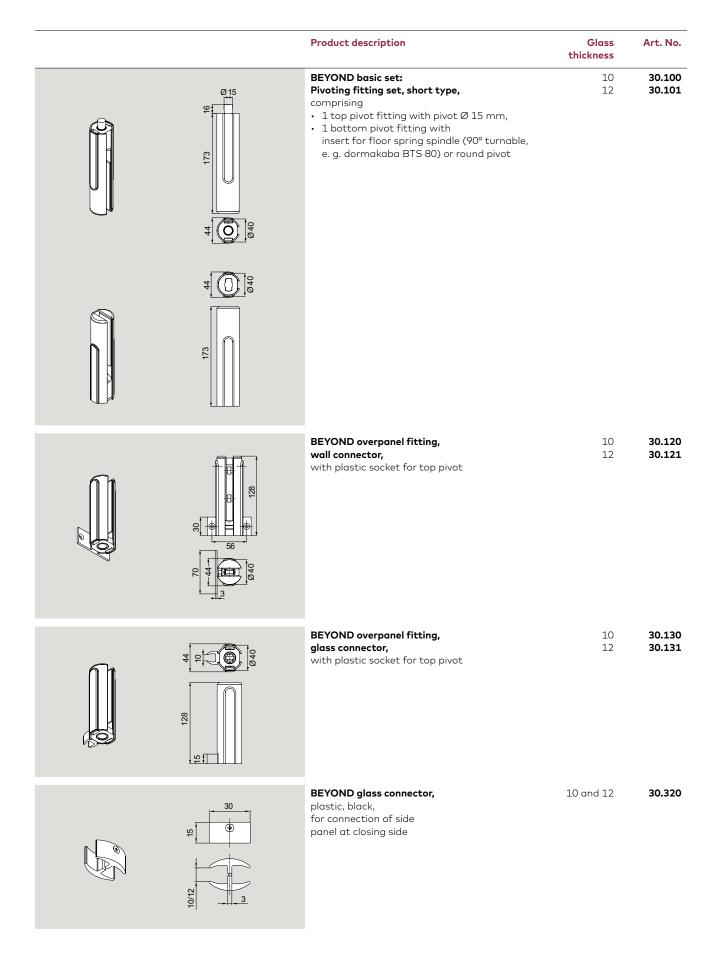

12/21 Dimensions in mm. 83

Continuous pivot rod

The BEYOND swing door system with continuous rod offers complete freedom from the risk of trapped fingers. By locating the pivot point of the swing door right at the glass edge and providing a round profile, the nip hazard is reduced to zero.

For the floor mounting of single-action, and particularly double-action doors, the dormakaba BTS floor spring offers a convenient alternative to the DORMA-Glas floor pivot. Since with the BTS floor spring the position of the pivot point requires it to be buried under the adjacent wall, the use of a glass side panel is recommended in this case. As with the short-rod model, the top connection depends on the type of unit. Toughened glass assemblies are fitted with an over panel pivot fitting, whereas with doors in wall openings a top pivot bearing with ceiling fixing is used. Load transfer from the over panel and side panel can be effected by means of wall adapter profiles.

In the case of heights over 2200 mm, an anti-vibration device located midway along the pivot rod ensures quiet door operation.


Depending on customer requirements, BEYOND offers suitable fittings for 10 mm and 12 mm glass.


Finishes for fittings and accessories: AL anodized, EV1 Deco, satin, matte (compatible with finish 150) (114) or AL anodized, similar stainless steel, polished, matte (107).


For maximum values please see the typical assemblies.

Note:

Overpanel fitting wall connector max. 1200 mm door width; overpanel fitting glass connector max. 1000 mm door width.







Basic fitting for individual door.

For installation in masonry.

Max door height 3000 mm Max. door weight 80 kg

Basic fitting and over panel fitting wall connector for door with over panel.

Optionally with side panel on closing side.

Max door height 3000 mm Max. door weight 80 kg

Basic fitting and over panel fitting wall connector for door with over panel and side panel on pivot point side.

Optionally with side panel on closing side.

Max door height 2200 mm


Max. door weight 80 kg

Side panel / wall Door F.F.L.

Combination BEYOND and dormakaba BTS

(door closer available from Door Control Division) With the dormakaba BTS floor spring, the position of the pivot point means that the unit has to be buried under the adjacent wall, or that the glass side screen has to be appropriately machined (see adjacent detail). The height of the recess cut into the glass will need to be adapted to the installation situation and the means by which the side screen is fixed.

Fittings and glass connector

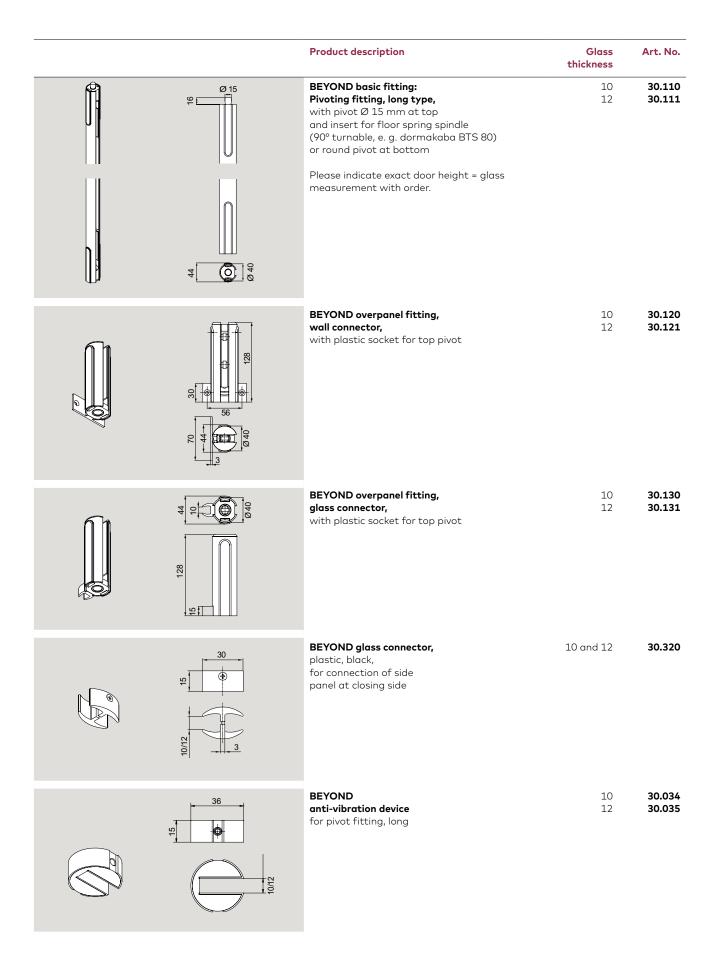

12/21 Dimensions in mm. 85

Glass preparation

Product description


Art. No.


Overpanel-sidelight connector

12.536

Weight in kg: Aluminum

0.146





20 8 Tension cut


Pivoting fitting set, short type

30.100 30.101

Drawing shows the bottom glass penetration. Top edge of glass is prepared accordingly.

30.101

86 Dimensions in mm. 05/18




Product description

Art. No.

Pivoting fitting, long typeDrawing shows the bottom glass penetration. Top edge of glass is prepared accordingly.

30.110 30.111



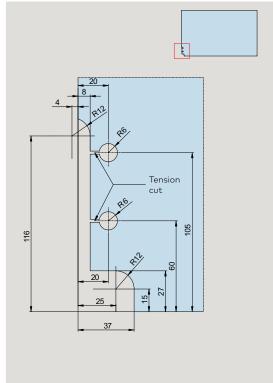

Content

EA

- 90 General information
- 91 Type illustrations
- 92 Components
- 100 Glass preparation
- 204 Accessories
- 226 Safety-related information

88



EA

The expansive range with slimline bodies for offset hung doors

EA patch fittings are characterized by their slim, neat shape and skilful hinge design. This comprehensive range of fittings allows the transparent elegance of single-action doors to reach their full potential – whether hung in frames or integrated in toughened glass assemblies.

Easy glass preparation secure fixing

DORMA-Glas has an intimate knowledge of the special properties of glass as a building material. This has led to the design of fittings requiring only minimal glass preparation – a quick and easy cut out with additional holes. Carefully considered and positive measures have been taken to create the maximum clamping surface with optimum clamping efficiency.

Suitable for 10, 12 and 8 mm glass thicknesses

DORMA-Glas EA patch fittings are available for 10 and 12 mm glass thicknesses. With additional gaskets these fittings can also be used for 8 mm glass.



Reliability built in

Quality materials and thorough workmanship mean that EA patch fittings have the features necessary to meet the most demanding of specifications.

Matching range of locks

The EA range includes a variety of locks and strike boxes in a matching design concept, giving the designer plenty of choice from the options available.

Virtually unlimited choice of colours and finishes

EA corner patches are available in the following finishes


- AL anodized, EV1, sanded, matte (for profiles: stained, matte) (101)
- AL anodized, similar stainless steel, polished, matte (107)
- AL anodized, special (199)
- AL powder coated, Special color (Standard powder according to the corresponding overview on our website. A price surcharge is possible for special colors outside the color range specified there.) (399)

Short delivery times

All standard articles as per price list are available ex-stock (factory). Specials will be prepared promptly.

90 01/23

Offset hung doors in rebated frames and toughened glass assemblies

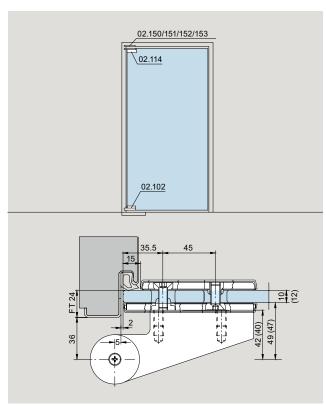

Offset hung doors in rebated frames


max. door weight: 90 kg max. door width: 1000 mm, using a bottom door rail: 1100 mm

EA patch fittings for offset hung doors in rebated frames are supplied as standard prepared for 24 mm rebate depth. They can be prepared to suit rebate depths from 15 – 23 mm, and from 25 – 40 mm. Please specify rebate depth with order.

max. door weight for 25–40 mm rebate depth: 80 kg max. door width for 25–40 mm rebate depth: 900 mm For doors with max. weight of 80 kg and max. width of 1000 mm use door rails.

The top centre frame portions are prepared to suit wood and steel frames. For aluminum frames, please enquire, giving details of aluminum system.

FT = rebate depth

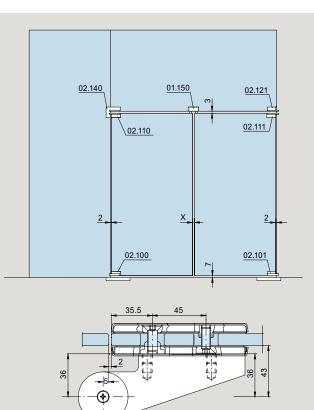

Offset hung doors in toughened glass assemblies

max. door weight: 100 kg max. door width: 1100 mm

For door weights up to 100 kg and widths up to 1200 mm, door rails should be used.

EA patch fittings for offset hung doors in toughened glass assemblies have a 36 mm offset (= 43 mm from pivot point to glass surface).

Gap required between leaves on pairs of doors

Individual leaf width in mm	X = gap required in mm
400-600	8
600-1000	6

Torque for fixing screws

Screws M 8: 12 Nm

Patch fittings for offset hung doors in rebated frames with 24 mm rebate depth

For 10 mm glass thickness (42 mm offset = 49 mm from pivot point to glass surface), complete. For 12 mm glass thickness (40 mm offset = 47 mm from pivot point to glass surface), complete. Accessories see page 204.

101 116

Product description **Bottom patch fitting**

to suit floor spring spindle, or round pivot 14 mm Ø counter-plate reduced by 15 mm to give free glass edge at side


Glass thickness Art. No.

*02.102/02.103 10, 12

Weight in kg:

Aluminum

0.747




Bottom patch fitting

10, 12 *02.104/02.105

to suit floor spring spindle, or round pivot 14 mm Ø counter-plate reduced by 15 mm to give free glass edge at side and bottom

Weight in kg:

Aluminum 0.715



Top patch fitting


10, 12 *02.112/02.113

10, 12 *02.114/02.115

counter-plate reduced by 15 mm to give free glass edge

Weight in kg:

Aluminum 0.680



Top patch fitting

counter-plate reduced by 15 mm to give free glass edge at side and top

Weight in kg:

Aluminum 0.644

92 Dimensions in mm. 12/20


^{*}Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Art. No.

*02.122/02.123

10, 12 *02.206/02.207

	Product description	Glass thickness
116	Overpanel patch fitting counter-plate reduced by 15 mm to give free glass edge at side, bushing outside Ø 20 mm, pivot Ø 15 mm Weight in kg: Aluminum 0.654	10, 12



Top patch fittingcomplete with pivot for frame
fixing, counter-plate reduced
by 15 mm to give free glass edge at side

Weight in kg:

0.915 Aluminum

 $^{^{\}ast}\textsc{Order}$ of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Patch fittings for offset hung doors in rebated frames with individual frame stop depth


Please specify rebate depth with order.

Rebate depth X = distance between outer surface of frame and rebate/stop (15 to 23 resp. 25 to 40 mm). Offset = rebate depth + 18 mm (33 to 41 resp. 43 to 58 mm). Complete, for 10 mm glass thickness. Accessories see page 204.

Product description

Art. No.

*02.106/02.107



Bottom patch fitting

to suit floor spring spindle or round pivot 14 mm Ø, counter-plate reduced by 15 mm to give free glass edge at side

Weight in kg:

Aluminum 0.832

101 15 116

Bottom patch fitting


*02.108/02.109

to suit floor spring spindle or round pivot $14 \text{ mm } \emptyset$, counter-plate reduced by

15 mm to give free glass edge at side and bottom

Weight in kg:

Aluminum 0.800




Top patch fitting

*02.116/02.117

counter-plate reduced by 15 mm to give free glass edge at side

Weight in kg:

Aluminum 0.760



Top patch fitting

*02.118/02.119

counter-plate reduced by 15 mm to give free glass edge at side and top

Weight in kg:


Aluminum 0.728

94 Dimensions in mm. 01/20

^{*}Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Product description


Art. No.



*02.124/02.125

Overpanel patch fitting counter-plate reduced by 15 mm to give free glass edge at side

Weight in kg: Aluminum 0.724



Top patch fitting

*02.208/02.209

complete with pivot for frame fixing, counter-plate reduced by 15 mm to give free glass edge at side

Weight in kg:

0.995 Aluminum

^{*}Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Patch fittings for offset hung doors in toughened glass assemblies

(36 mm offset = 43 mm from pivot point to glass surface), complete, for 10 and 12 mm glass thickness.

Product description

Art. No.


*02.100/02.101

Bottom patch fitting

to suit floor spring spindle, or round pivot 14 mm Ø

Weight in kg:

0.730 Aluminum




Top patch fitting

*02.110/02.111

*02.120/02.121

Weight in kg:

0.660 Aluminum



Overpanel patch fitting


bushing outside Ø 20 mm, pivot Ø 15 mm

Weight in kg:

Aluminum

0.637





and sidelight

bushing outside Ø 20 mm, pivot Ø 15 mm

Weight in kg:

Aluminum

0.832

96 Dimensions in mm. 12/18

^{*}Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Product description

Art. No.


Top patch fitting


complete with pivot for sidelight

Weight in kg:

Aluminum 1.415

*02.200/02.201






Top patch fitting


complete with pivot for wall fixing

Weight in kg:

Aluminum 1.277

*02.202/02.203






Top patch fitting


complete with pivot for frame fixing

Weight in kg:

Aluminum 0.895

*02.204/02.205






 $^{^{*}\}textsc{Order}$ of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)


Top centres for wood and steel frames

Product description Frame top centre with fixing block

Art. No.

02.150






Weight in kg:

0.471 Aluminum

(If corner fittings / door rails are combined with frame top centres as described, please indcate rebate depth with order.)

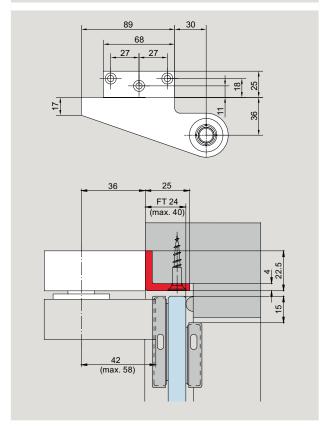

Frame top centre

with angle bracket

Weight in kg:

Aluminum 0.453 02.151

98

36 FT 24 (max. 40) M8 42 (max. 58)

Product description

Art. No.


Frame top centre *02.152/02.153 only for steel frames, with special wedge screw

fixing

Weight in kg:

Aluminum 0.390

Drill jig: 8.02.081.001.50

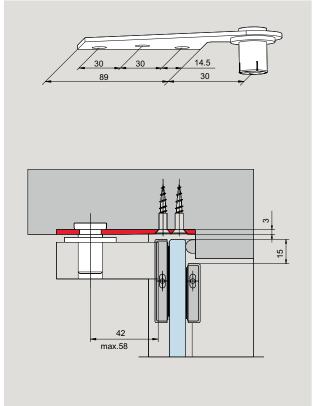

Frame top centre AT 212 GSR

*02.340/02.341


with mounting plate

Weight in kg:

Stainless steel 0.215

 $^{^{\}star}$ Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Glass preparation

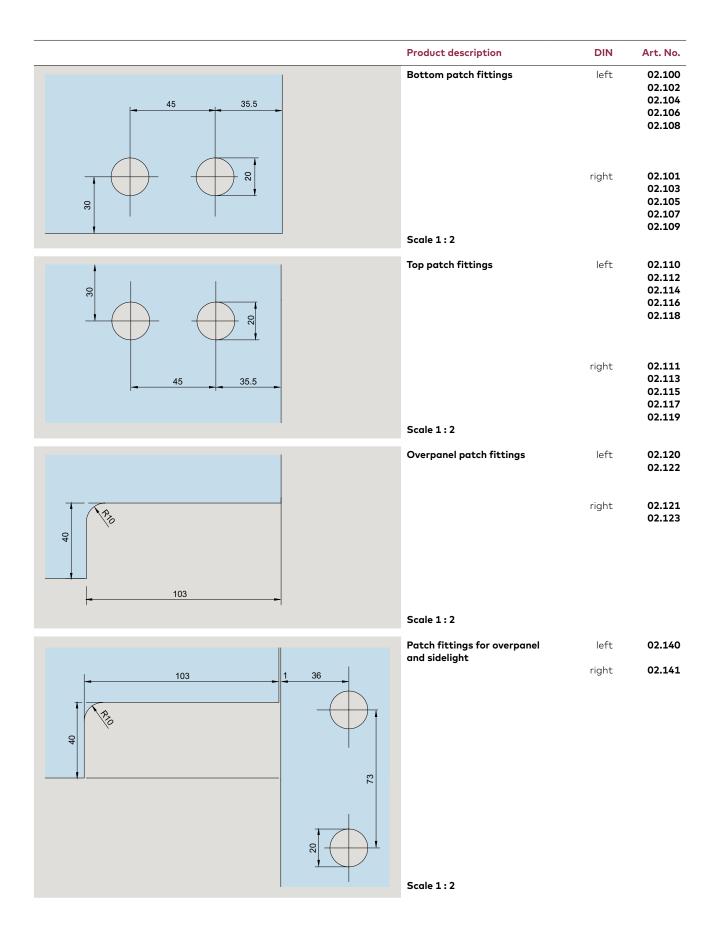

100 Dimensions in mm. 12/20

Space for your notes

ContentTP/TA EASY Safe

104 General information

105 Type illustrations

110 Components

204 Accessories

226 Safety-related information

102 12/21



The TP/TA EASY Safe door rail range leaves nothing to be desired

The TP/TA EASY Safe door rails for single- and double-action doors are recommended at the top and bottom of the door leaf to stabilize particularly wide doors, or for use only at the bottom edge of the door to protect against impact. Improved sealing against draught is ensured by the double brush channels (positioned towards the inside and outside of the room) which also continue through the lock area. The door rails can also be used identically as side panel rails on fixed parts. Matched to the design and surfaces of DORMA-Glas patch fittings, they create a uniform appearance even in complex toughened glass assemblies. In larger buildings, they extend this continuity to various shop front and entrance solutions by being identically designed like the door rails of HSW systems - on individual doors, in toughened glass assemblies and with horizontal sliding walls.

Strong against burglary - safe for the people

The sturdy basic profiles of the door rails with the integrated locks are screwed together at intervals of 150 mm from the inside of the room, thus ensuring a firm hold on the glass without access from the outside. Additional bonding (Clamp&Glue) is ideal when using toughened safety glass, and obligatory for laminated safety glass. It provides even more protection against burglary. With locks, the area of application determines the design. Whether prepared for profile or round cylinders, with or without security roses, as a bolt lock closing vertically in the floor or ceiling, or with an additional microswitch for a status indication - everything is in here. Laterally closing latch locks in the door rail are also possible in combination with electric strikes in the adjacent side panel rail.

Durably high quality

The vertically closing lock inserts are characterized by a special corrosion and abrasion resistant bolt with integrated, hardened safety roller pin. This provides the highest corrosion resistance according to EN 670, class 4 and DIN 825, class 3 (with regard to type testing*). A neutral testing institute successfully tested the latch function with 500000 movement cycles and the bolt with 100000 movement cycles.

Easy adjustment of the doors - during and after installation

The clamping of the door rails on the glass panel by screwing from only one side makes installation particularly easy, especially with upper pivot points or fixing of fixed panels. This also offers great advantages for adjustment. By easily loosening and re-fixing the upper and lower door rails and the separately clamped lower insert, the vertical glass edges can be aligned exactly to each other, the height adjustment

can be adjusted and the pivot point can be positioned exactly, especially when the system is installed. In order to prevent possible damage due to subsequent work in the area around the door, the covers can be simply clipped on at the very end in the color-giving finishes.

No glass preparation, secure fastening

Well acquainted with the special features of glass, DORMA-Glas has designed the door rails in such a way that drilling and other glass processing is unnecessary (except for rails with latch lock and electric opener). Sophisticated design measures ensure large clamping surfaces with optimum effect. When using laminated safety glass made of annealed glass or laminated safety glass made of toughened safety glass, additional bonding of the door rail to the glass is mandatory. This minimizes the clamping force and prevents glass breakage.

Just the right measure

With a uniform height of 105 mm (4.2"), the door rails are manufactured to exact dimensions for doors up to a maximum width of 1400 mm. Starting with a standard glass thickness of 10 mm toughened safety glass, glass in other thicknesses can also be accommodated with the appropriate intermediate gaskets to suit the order.

TSG: 10 mm; 12 mm; 15 mm; 19 mm LSG (made of 2 x TSG): 10.8 mm; 12.8 mm; 13.5 mm; 17 mm

Variable central pivot point


The door rail inserts for doors with a central pivot point are designed in such a way that the pivot point dimension (distance between the centre of the pivot axis of the door and the wall or adjacent fixed glass panel) can be selected between 55 and 65 mm. Preassembled with a pivot point of 65 mm as standard, the corresponding insert can be loosened, turned through 180 degrees around the vertical axis and clamped into the door rail again. A separate insert for a 22 mm pivot point (for floor bearings or dormakaba BTS) is also available.

Finishes - beauty and protection

In protected indoor areas or exposed to wind and weather: For every application, the surface of the cover profiles also contributes to the right solution. This may concern the color to match the ambience or the choice of material. In extreme weather conditions, for example near the coast, we recommend our highly weather-resistant powder coating on aluminum profiles as well as stainless steel covers.

104 12/21

Technical specifications

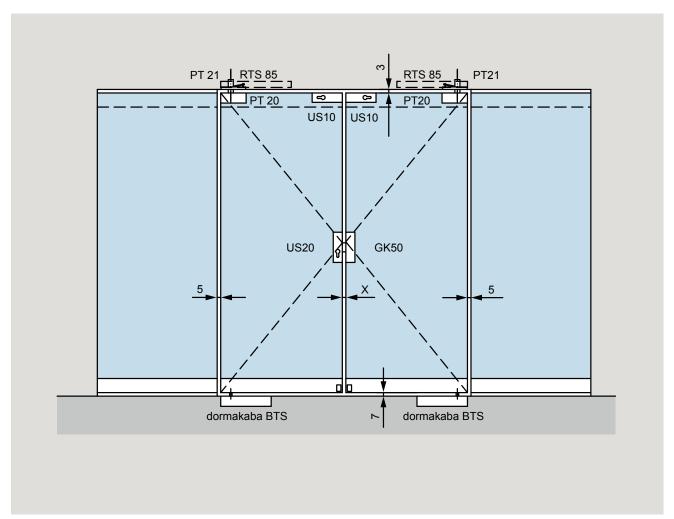

Note: Please always indicate the glass thickness when ordering!

Glass size – height:

Rail height – 105 mm							
Use of rail(s)	total door height less						
bottom	80 mm						
top	80 mm						
bottom + top	160.0 mm						

Please treat floor and ceiling clearances separately

Door rail weight:

Version	Weight
Aluminum	7 kg / m
Satin stainless steel	8.5 kg / m

Gaskets	10 mm
for glass	10.8 mm
thicknesses	12 mm
available	12.8 mm
as follows:	13.5 mm
	15 mm
	17 mm
	19 mm

Gap required between pairs of doors:

Offset hung doors and Centre hung doors:					
X					
5 mm					

Tolerance of glass thickness: +/- 0.5 mm

RTS = transom closer

Note: For door rail designs with free glass edge, a glass thickness of max. 12.8 mm is possible.

Technical data

Maximum dimensions for use of bottom door rails in combination with top door rails or top patch fittings

Panels with double-action door rails combined with \dots

	Panel type	Bottom door rail standard		Bottom door rail special type with bottom strap in forged steel			Comments		
		weight kg	width mm	height mm	weight kg	width mm	height mm	*For high frequent- ed doors we generally recom- mend to use the	
Door rails for centre hung doors, combined with								bottom strap in forged steel with reduced max.	
Patch fittings UNIVERSAL	•	110	1200	3000	120	1200	3500	measurements. **pivot point	
Patch fittings EP UNIVERSAL pinch	•	100	1100	3000				20 mm ***only for double- action doors with	
Door rails standard	•	150	1200	3500	200*** (150*)	1400*** (1200*)	4000 (3500*)	door rail top and botton	
Door rails clamp free	•	120	1200	3500					

Panels with single-action door rails combined with \dots

	Panel type	Bottom door rail standard			Comments
		weight kg	width mm	height mm	
Door rails for offset hung doors in toughened glass assemblies, combined with					34 mm door stap for toughened glass assemblies
Patch fittings EA	•	100	1200	3000	
Door rails standard	•	100	1200	3500	
Door rails for offset hung doors in rebated frames (24 mm/26 mm rebate depth), combined with					40 mm/42 mm door stap for 24 mm/26 mm rebate depth
Eckbeschlägen EA	•	90	1100	3000	
Türschienen Standard	•	90	1100	3500	
Door rails for offset hung doors in rebated frame (27 mm – 40 mm rebate depth), combined with					43 mm/58 mm door stap for 27 mm – 40 mm rebate depth
Patch fittings EA	•	80	1000	3000	
Door rails standard	•	80	1000	3500	


Torque for fixing screws: Screws M $8:15\ Nm$

106 12/20

Doors weighing 150 kg or more or with a height of 3000 mm or more must be glued. For gluing instructions, see matrix for door dimensions, TB Fittings for toughend glass assemblies.

Space for your notes

Rail cross sections

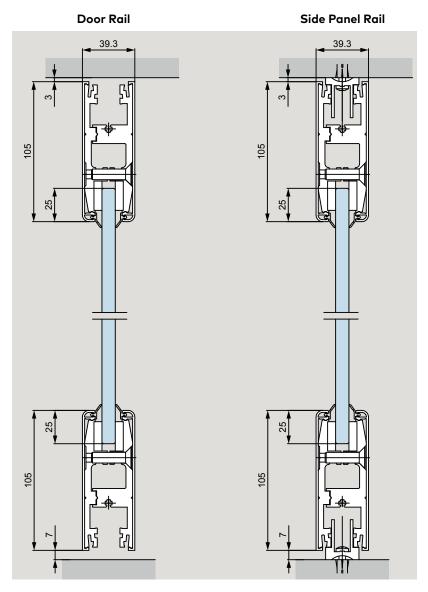


Product description Double sealing brush for door rails (also in the area of inserts, locks, etc.) stock length 2,000 mm Art. No.

108 Dimensions in mm. 12/20


Construction details

Please always indicate when ordering:


- DIN direction and opening direction
- Pivot point or rebate depth
- · exact wing width
- Glass thickness and glass type (LSG made from PTG or TSG)
- Details of the type of locking system



Offset hung door in toughened glass assembly

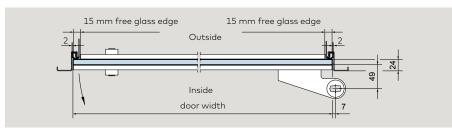


Offset hung door in rebated frame with 24 mm rebate depth

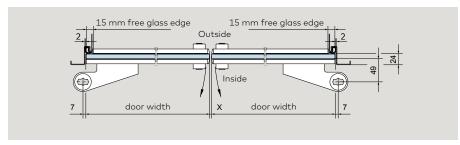


Pair of offset hung doors in rebated frame with 24 mm rebate depth

X = Gap, 5 mm

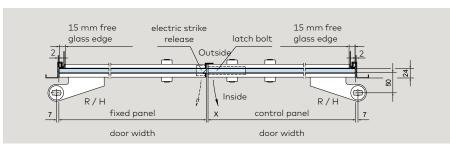


Pair of offset hung doors in rebated frame with 24 mm rebate depth (also available with inserts for centre hung doors), with electric strike release and latch bolt

X = Gap, 5 mm

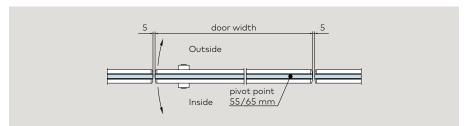


Centre hung doors with pivot point 55 / 65 mm und 20 mm

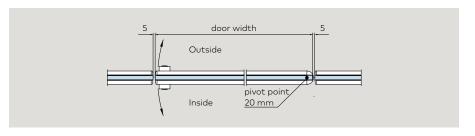

Door rails for offset hung doors in toughened glass assemblies without rebated frames

Complete, for 10 mm glass thickness, without free glass edges, pivot point to glass surface 43 mm

Note: Please note the internal screw connection of the door rail




Product description

Art. No.




*40.731/40.733



Additional module with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt


*40.751/40.753




Additional module with side locking lock,

prepared for Europrofile cylinder, double throw

*40.771/40.773



Additional module with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and latch bolt at side for electric strike release *40.779/40.781



 $^{\star}\mathrm{Left}\,/$ right hand (illustration shows right hand) are determined by view from hanging side.

110 Dimensions in mm. 12/20

Please always indicate when ordering:

- DIN direction
- exact wing width
- Glass thickness and glass type (TSG, annealed glass or LSG made of TSG)
- Details of the type of locking system


Product description

Art. No.

Additional module with downward closing bolt lock, PZ prepared, 1-turn with corrosion protected bolt and hardened safety roller pin and lateral E-opener


*40.783/40.785 (for Art. No. 40.781/40.779)

(Standard: fail secure function, 6 to 12 V -/~)




Upper base rail

*40.732/40.734



Additional module with top locking lock, prepared for Europrofile cylinder, single throw

*40.752/40.754



Additional module with side locking lock, prepared for Europrofile cylinder, double throw

*40.772/40.774

 $^{\star}\mathrm{Left}\,/$ right hand (illustration shows right hand) are determined by view from hanging side.

Door rails for offset hung doors in toughened glass assemblies without rebated frames

Please always indicate when ordering:

- DIN direction
- exact wing width
- Glass thickness and type (TSG, annealed glass or LSG made of TSG)
- Details of the type of locking system


Product description

Art. No.


*40.784/40.786

40.782/40.780)

(for Art. No.



Upper base rail Additional module with top locking **40.780/40.782 lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and latch bolt at side for electric strike release



Additional module with top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and electric strike release (Standard: fail secure function, 6 to $12 V -/\sim$)


- *Left / right hand (illustration shows right hand) are determined by view from
- **Left / right hand (illustration shows left hand) are determined by view from hanging side.

112 Dimensions in mm. 12/20

Door rails for offset hung doors in rebated frames

With 24 mm rebate depth

Complete, for 10 mm glass thickness, strap 40 mm, with free glass edge left and right, pivot point to glass surface 50 mm. Also available for rebate depths up to 40 mm. If required, please talk to our Application Engineering people.



Please always indicate when ordering:


- DIN direction
- Deviating rebate depth up to max. 40 mm
- · exact wing width
- Glass thickness/type (TSG, annealed glass or LSG made of TSG)
- Details of the type of locking system

Product description

Art. No.




*40.735/40.737




Additional module with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll

*40.755/40.757




Upper base rail

*40.736/40.738



Additional module with top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

*40.756/40.758




 $^{\star}\mathrm{Left}\,/$ right hand (illustration shows right hand) are determined by view from hanging side.

Door rails for double offset hung doors in rebated frames


With 24 mm rebate depth

Complete, for 10 mm glass thickness, strap 40 mm, with 15 mm free glass edge of hanging stile, pivot point to glass surface 50 mm




Product description

Art. No.




Lower base rail

*40.739/40.741



Additional module with floor locking lock, prepared *40.79 for Europrofile cylinder, single throw

*40.759/40.761



Additional module with side locking lock, prepared *40.775/40.777 for Europrofile cylinder, double throw

*Left / right hand (illustration shows right hand) are determined by view from hanging side.


114 Dimensions in mm. 12/20

Please always indicate when ordering:

- DIN direction
- Deviating rebate depth up to max. 40 mm
- exact wing width
- Glass thickness and type (TSG, annealed glass or LSG made of TSG)
- Details of the type of locking system

Product description


Art. No.



Lower base rail

*40.743/40.745

with floor locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and latch lock at side for electric strike release



Additional module with floor locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and electric strike release at side (Standard: fail secure function, 6 to $12 \text{ V} -/\sim$)


*40.747/40.749

 $^{\star}\mathrm{Left}\,/$ right hand (illustration shows right hand) are determined by view from hanging side.

Door rails for double offset hung doors in rebated frames

Please always indicate when ordering:

- DIN direction
- Deviating rebate depth up to max. 40 mm
- exact wing width
- Glass thickness and type (TSG, annealed glass or LSG made of TSG)
- Details of the type of locking system




Product description

Art. No.


Upper base rail

*40.740/40.742



Additional module with top locking lock, prepared for Europrofile cylinder, single throw

*40.760/40.762




Additional module with side locking lock, prepared for Europrofile cylinder, double throw

*40.776/40.778

*Left / right hand (illustration shows right hand) are determined by view from hanging side.


116 Dimensions in mm. 12/20

Double door with electric opener and latch lock



Product description


Art. No.



Upper base rail

*40.744/40.746

with top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and latch bolt at side for electric strike release



Additional module with top locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and electric strike release at side (Standard: fail secure function, 6 to 12 V -/~)

**40.748/40.750 (for Art. No. 04.182/04.180)


^{*}Left / right hand (illustration shows left hand) are determined by view from handing side

^{**}Left / right hand (illustration shows right hand) are determined by view from hanging side.

Door rails for double-action doors


Complete, for 10 mm glass thickness

Pivot point dimension for combination door rail and UNIVERSAL fittings 55 / 65 mm




Product description

Art. No.




Lower base rail with stainless steel insert to suit floor spring spindle or round pivot $14 \text{ mm } \varnothing$

*40.701/40.801




Additional module with floor locking lock, prepared for Europrofile cylinder, single throw

*40.711/40.811



Additional module with floor locking lock, prepared for round cylinder, single throw with corrosion resistant bolt and hardened safety roll pin *40.763/40.863



Additional module with strike-box for side bolt locking,

40.915

door width up to

max. 1200 mm (> 1200 mm on request)

*Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)


118 Dimensions in mm. 12/21

Please always indicate when ordering:

- DIN direction
- exact wing width
- Glass thickness and type (TSG, annealed glass or LSG made of TSG)
- Details of the type of locking system


Product description

Art. No.



Additional module with side locking lock, prepared for Europrofile cylinder, double throw


*40.721/40.821



Lower base rail

*40.791/40.793

with latch lock at side for electric strike release and floor locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin. The use of latch lock or electric strike release results from a single-action door situation.



Additional module with electric strike release at side

*40.796/40.798

(Standard: fail secure function, 6 to 12 V $^-$) and floor locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin. The use of latch lock or electric strike release result from a single-action door situation.

 * Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)


Door rails for double-action doors

Complete, for 10 mm glass thickness

Pivot point dimension for combination door rail and UNIVERSAL fittings 55 / 65 mm


Product description

Art. No.




Upper base rail with insert to take 15 mm Ø pivot pin

*40.702/40.802



Additional module with top locking lock, prepared *40.712/40.812 for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin



Additional module with top locking lock prepared for round cylinder, single throw with corrosion resistant bolt and hardened safety roll pin *40.763/40.863

*Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)


12/21

Please always indicate when ordering:

- DIN direction
- exact wing width
- Glass thickness and type (TSG, annealed glass or LSG made of TSG)
- Details of the type of locking system

Product description

Art. No.




Upper base rail

with side locking lock, prepared for Europrofile cylinder, double throw


TP/TA EASY Safe

*40.722/40.822



Additional module with latch lock at side for electric strike release and top locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin. The use of latch lock or electric strike release results in a single-action door situation.

*40.792/40.794



Additional module with electric strike release at side (Standard: fail secure function, 6 to $12 \text{ V} - / \sim$) and top locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin. The use of latch lock or electric strike release results in a single-action door situation.

*40.797/40.799

 * Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Door rails for double-action doors prepared for frame door closers RTS 85

Complete, for 10 mm glass thickness


Pivot point dimension for combination door rail and UNIVERSAL fittings 55 / 65 mm

Please always indicate when ordering:

- · DIN direction
- exact wing width
- Glass thickness and type (TSG, annealed glass or LSG made of TSG)
- · Details of the type of locking system


Product description

Art. No.




Upper base rail with insert for RTS transom closer


*40.706/40.806



Additional module and top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin *40.716/40.816



Additional module with top locking lock prepared for round cylinder, single throw with corrosion resistant bolt and hardened safety roll pin *40.767/40.867



Additional module and side locking lock, prepared for Europrofile cylinder, double throw

*40.726/40.826


122 12/21

^{*}Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Door rails for double-action doors


Complete, for 10 mm glass thickness

Pivot point dimension for combination door rail and UNIVERSAL fittings 55 / 65 mm




Product description

Art. No.




Lower base rail with floor spring spindle insert


*40.703/40.803



Additional module with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pinn *40.713/40.813



Additional module with floor locking lock prepared for round cylinder, single throw (not illus-trated) with corrosion resistant bolt and hardened safety roll pin *40.765/40.865



Additional module with side locking lock, prepared for Europrofile cylinder, double throw

*40.723/40.823

12/21 123

^{*}Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Door rails for double-action doors

Complete, for 10 mm glass thickness


Pivot point dimension for combination door rail and door rail, prepared for floor bearing, 20 mm

Please always indicate when ordering:

- · DIN direction
- exact wing width
- Glass thickness and type (TSG, annealed glass or LSG made of TSG)
- Details of the type of locking system


Product description

Art. No.



Lower base rail preprared for floor bearing

*40.707/40.807




Lower base rail


*40.717/40.817

with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin,

prepared for floor bearing



Additional module with floor locking lock prepared for round cylinder, single throw with corrosion resistant bolt and hardened safety roll pin, prepared for floor bearing *40.768/40.868



Additional module with side locking lock, prepared for Europrofile cylinder, double throw, prepared for floor bearing

*40.717/40.827

12/21

^{*}Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Complete, for 10 mm glass thickness

Pivot point dimension for combination door rail and door rail, prepared for floor bearing, 20 mm


Please always indicate when ordering:

- · DIN direction
- exact wing width
- Glass thickness and type (TSG, annealed glass or LSG made of TSG)
- Details of the type of locking system

Product description

Art. No.

*40.704/40.804




Upper base rail

with 15 mm Ø pivot pin,
A version without pivot-pin is also possible,
please specify when ordering.




Additional module and top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

*40.714/40.814




Additional module with top locking lock prepared for round cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

*40.766/40.866



Additional module with side locking lock, prepared for Europrofile cylinder, double throw

*40.724/40.824



 $^{^{\}star}$ Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

12/21 125

Rails for side panel


Complete, for 10 mm glass thickness

Please always indicate when ordering:

- · DIN direction
- exact wing width
- Glass thickness and type (TSG, annealed glass or LSG made of TSG)
- Details of the type of locking system

Product description

Art. No. 40.901




Lower base rail for side panel, up to approx. 6000 mm long with rail filler insert 7 mm

Additional module with electric stike release

*40.911/40.913

(standard: fail secure function, 6 to 12 V -/~), door width up to

max. 1200 mm (> 1200 mm on request)




Additional module with strike-box for side bolt locking,

40.915

door width up to

max. 1200 mm (> 1200 mm on request)



*Left / right hand (illustration shows right hand) are determined by view from

126 Dimensions in mm. 12/21

Please always indicate when ordering:


- DIN direction
- exact wing width
- Glass thickness and type (TSG, annealed glass or LSG made of TSG)
- Details of the type of locking system

Product description

Art. No. 40.902

Upper base rail for side panel,


up to approx. 6000 mm long with rail filler insert 3 mm



Additional module with electric strike release

*40.912/40.914

(standard: fail secure function, 6 to $12 V -/\sim$)




Additional module with strike-box for side bolt locking

40.916

*Left / right hand (illustration shows right hand) are determined by view from

Top centre frame portion with top door rail ES

in combination with patch fittings see chapter EA

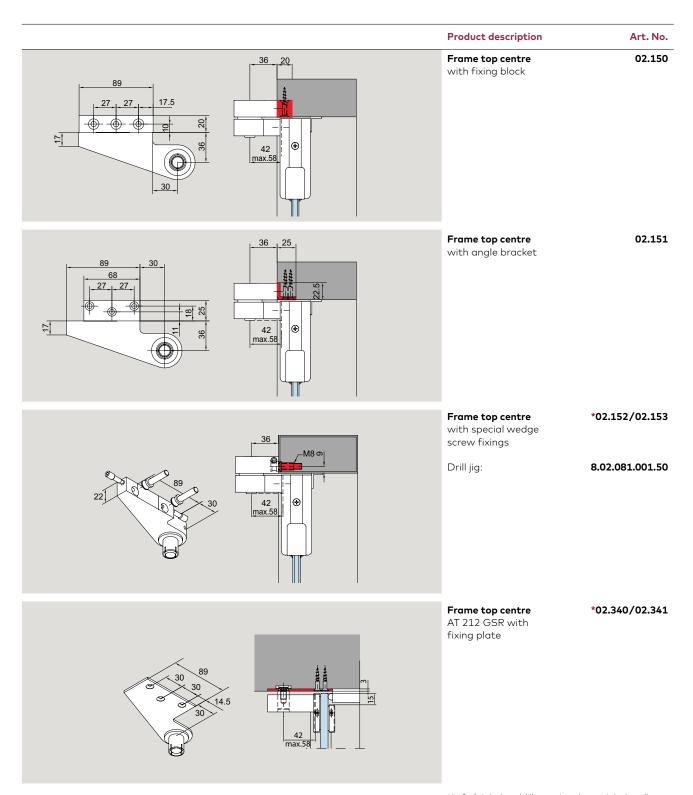

^{*}Left / right hand (illustration shows right hand) are determined by view from hanging side.

128 Dimensions in mm. 01/22

Special accessories and special inserts for door rails

Product description

Art. No.


Double sealing brush

40.072

for door rails (also in the area of inserts, locks, etc.)

Sealing brush 1 St = 2m

stock length 2 m (= 1 coil)



Aluminum round profile

03.380

for pinch free doors with 65 mm pivot point, consisting of 2 halfs, prepared for UNIVERSAL fittings* or door rails 106 mm.

Please indicate:

- Panel height (max. 3000 mm, higher dim. on request)
- Required preparation of the profile for top and bottom fittings

fixed length

stock length 6000 mm (not prepared) stock length 3000 mm (not prepared)

03.381 03.382

Weight in kg/m:

Aluminum 4.744

12/20 Dimensions in mm. 129

Special accessories and special inserts for door rails

Bottom inserts

Produktbeschreibung


Art.-Nr. 40.071

Bottom insert ES

for floor spring spindle profile or round pivot 14 mm Ø, (floor spring dormakaba BTS or floor bearing

Art. No. 01.106 and 01.107), stainless steel, 55/65 mm pivot point

max. door weigh 150 kg, max. door widthe 1300 mm



lower steel door lever ES

40.567


in forged steel special edition, mounted in door rails, to suit floor spring spindles. (Also suitable for floor bearing 04.602, 04.603. Not suitable for floor bearing with round pivot.) For centre hung doors

- normal frequented doors, max. door weight 200 kg, max. door width 1400 mm
- · high frequented doors,

max. door weight 150 kg,

max. door width 1200 mm Pivot point either 20/55/65 mm

(please specify with order)




Frame bottom centre ES,

aluminum, to suit floor bearings 01.106 and 01.107, 20/55/65 mm pivot point,

max. door weight 80 kg





Screw-on floor bearing for damp environment,

without floor recess, with inserts for door rails, $\mathbf{max.}\ \mathbf{110}\ \mathbf{kg,}$ for the standard pivot points

20, 55, 65 mm usable (infinitely variable)

40.566

130 12/21

Upper insert

Produktbeschreibung	ArtNr.
Upper insert ES 20/55/65 mm pivot point, Aluminum	40.564
Upper split insert ES, Aluminum, special, 55/65 mm pivot point not in standard door rail	40.578
Upper insert, galvanised steel, 65 mm pivot point,ES for dormakaba RTS transom closer, zinc plated steel, 65 mm pivot point	40.577
Frame top centre ES Aluminum, 20/55/65 mm pivot point	40.563

12/20 131

Content TP/TA 76.5

134 General information

135 Type illustrations

138 Components

204 Accessories

226 Safety-related information

132 01/22



TP/TA 76.5

TP/TA 76.5 – door rails which leave nothing to be desired

TP / TA 76.5 door and side panel rail coordinate in design, dimensions and finishes with all DORMA-Glas patch fittings. This creates the opportunity to specify fittings for the assembly wich provide maximum protection and effective sealing of the lower glass edges. The provision of door rails allows the installation of exteremely heavy-duty and wide doors.

Tamper resistant, with integral locks

The robust base rails are screwed together from alternate sides of the door at 150 mm centres. This makes unauthorised removal of the rail virtually impossible. All door rails are available with integral locks, prepared for profile cylinders and with security rosettes, or prepared for certain lever locks.

Special security- and quality characteristics

The particular feature of the locks with bottom or top locking bolt is a special corrosion and abrasion resistant bolt with integrated safety roll pin (hardened). By this the locks comply to DIN 18251, class 3 (according to type testing*) and the highest corrosion resistance according to EN 1670, class 4 is achieved. Furthermore the lock was tested successfully by a neutral testing institute with 500000 latch and 100000 locking bolt operating cycles.

Easy door adjustment – especially whilst hanging

Because TP / TA 76.5 rails are a screw/clamp system, they have a great advantage over other systems. The rail can be adjusted up and down, and also side to side, to compensate for irregularities in the door opening.

Also, the clip-on rail cover has advantages. Because the door can be hung and secured without it, the covers need not be fixed until the wet trades have finished and the cleaners have been through.



No glass preparation, firm fixing

DORMA-Glas has an intimate knowledge of the special properties of glass as a building material. This has led to the design of rails requiring no glass preparation – no holes, no cut-outs. Carefully considered and positive measures have been taken to create the maximum clamping surface with optimum clamping efficiency.

Length to order, to suit 10 mm or 8 mm and 12 mm

The door rail is 76.5 mm high and available in custom lengths. As standard, the door rail is prepared with gaskets for 10 mm glass thickness. However, it can also be ordered with gaskets for 8 or 12 mm.

Variable pivot point and absolute pinch free on door rails for centre hung doors TP

All the inserts for door rails in the TP / TA range haven been designed and manufactured to give two options in the pivot point distance from the sidepanel or frame. It can be either 55 mm or 65 mm (distance from pivot point to door edge - 53 mm and 63 mm respectively). In order to change from the standard dimension of 65 mm to 55 mm, the standard insert is unscrewed from the patch, rotated through 180°, and refixed position. At 65 mm pivot point and the use of a special round profile (page 148) doors can be built pinch free (constant air gap of 4 mm).

Reliability built in

Quality materials and thorough workmanship mean that TP / TA 76.5 rails have the features necessary to meet the most demanding of specifications.

Short delivery times

All standard articles as per price list are available ex-stock (factory). Specials will be prepared promptly.


Finishes

Special coatings are required at extreme environment conditions (i.e. coastal areas).

134 01/22

^{*}Extract from DIN 18251, class 3: type-test with 50000 locking bolt operating cycles.

Technical specifications

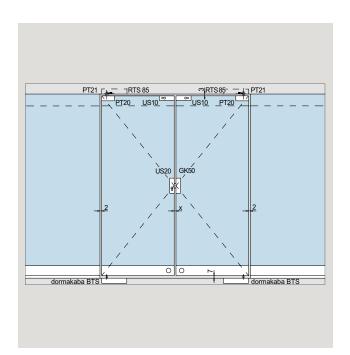

Glass size – height:

Rail height – 76.5 mm					
Use of rail(s)	total door height less				
bottom	56.5 mm				
top	56.5 mm				
bottom + top	113.0 mm				

Please treat floor and ceiling clearances separately

Gap required between pairs of doors:

Offset hung doors:				
Individual leaf width	X			
over 1000 mm	4 mm			
1000-600 mm	6 mm			
600-400 mm	8 mm			

Centre hung doors:

X = 4 mm

RTS = transom closer


Maximum dimensions for use of bottom door rails in combination with top door rails or top patch fittings

	Panel type	Bottom door rail standard		Bottom door rail special type with bottom strap in forged steel			Comments	
		weight kg	width mm	height mm	weight kg	width mm	height mm	*For high frequent- ed doors we generally recom- mend to use the
Door rails for centre hung doors, combined with								bottom strap in forged steel with reduced max. measurements.
Patch fittings UNIVERSAL	•	110	1100	3000	120	1100	3000	
Door rails standard	•	120	1100	3000	120*	1100*	3000*	
Door rails for offset hung doors in toughened glass assemblies, combined with								34 mm door stap for toughened glass assemblies
Patch fittings EA	•	100	1100	3000				
Door rails standard	•	100	1100	3000				
Door rails for offset hung doors in rebated frames (24 mm/26 mm rebate depth), combined with								40 mm/42 mm door stap for 24 mm/26 mm rebate depth
Patch fittings EA	•	90	1100	3000				
Door rails standard	•	90	1100	3000				
Door rails for offset hung doors in rebated frames (27 mm – 40 mm rebate depth), combined with								43 mm/58 mm door stap for 27 mm–40 mm rebate depth
Patch fittings EA	•	80	1000	3000				
Door rails standard	•	80	1000	3000				

Torque for fixing screws: Screws M 8 : 20 Nm

01/22 135

Rail cross sections

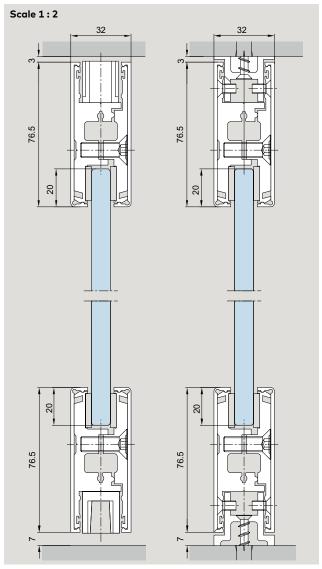


Door rails, 76.5 mm high

Side panel rails, 76.5 mm high


Product description Art. No. AGILE Aluminum profile brush seal to prevent draughts and 04.600 energy loss (not in the area of inserts, locks, etc.), connected with door rail at manufacturer Weight in kg/m: 0.753 Rubber sealing for door rails (also in the area of inserts, locks, etc.) fixed length 04.607 stock length 200 m (= 1 coil) 04.608 Weight in kg/m: 0.099

136 Dimensions in mm. 07/21


Construction details

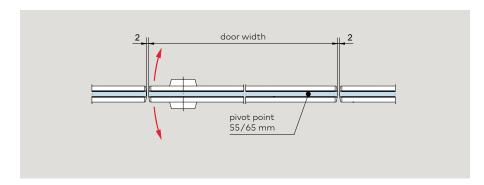


Centre hung doors

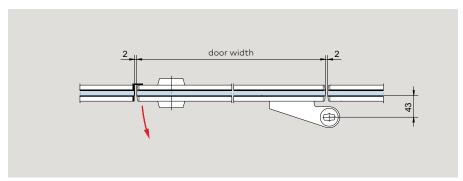


Offset hung door in toughened glass assembly

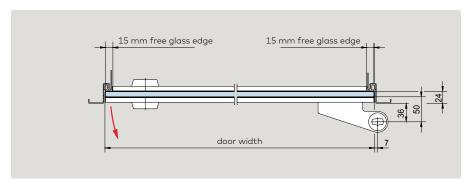

Offset hung door in rebated frame with 24 mm rebate depth

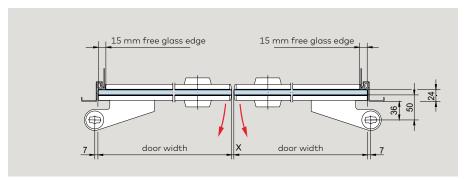

Pair of offset hung doors in rebated frame with 24 mm rebate depth

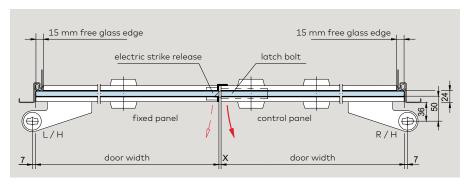

Pair of offset hung doors in rebated frame with 24 mm rebate depth (also available with inserts for centre hung doors), with electric strike release and latch bolt

X = Gap, see table page 135.

Door rails for offset hung doors in toughened glass assemblies without rebated frames

Complete, for 10 mm glass thickness, strap 34 mm, without free glass edges, pivot point to glass surface 43 mm

Product description

Art. No.


Bottom rail

76.5 mm:

Weight in kg/m:

Aluminum 4.257 Stainless steel 5.555

*04.031/04.033



 $^{\rm t}{\rm Left}\,/$ right hand (illustration shows right hand) are determined by view from hanging side.


Top rail

76.5 mm:

Weight in kg/m:

Aluminum 4.187 Stainless steel 5.522

*04.032/04.034



...with top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

76,.5 mm:

Weight in kg/m:

Aluminum 4.522 Stainless steel 5.972

*04.052/04.054

138 Dimensions in mm. 12/21

 $^{^{\}star}\mathrm{Left}\,/$ right hand (illustration shows right hand) are determined by view from hanging side.

Door rails for offset hung doors in rebated frames

With 24 mm rebate depth

Complete, for 10 mm glass thickness, strap 40 mm, with free glass edge left and right, pivot point to glass surface 50 mm Also available for rebate depths up to 40 mm.

If required, please talk to our Application Engineering people.

Product description

Art. No.


Bottom rail

76.5 mm:

Weight in kg/m:

Aluminum 4.181 Stainless steel 5.407

*04.035/04.037




...with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

76.5 mm:

Weight in kg/m:

Aluminum 4.516 Stainless steel 5.857

*04.055/04.057




Top rail

76.5 mm:

Weight in kg/m:

Aluminum 4.111 Stainless steel 5.374

*04.036/04.038



...with top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

76.5 mm:

Weight in kg/m:

Aluminum 4.446 Stainless steel 5.824

*04.056/04.058

^{*}Left / right hand (illustration shows right hand) are determined by view from hanging side.

Door rails for double offset hung doors in rebated frames

With 24 mm rebate depth

Complete, for 10 mm glass thickness, strap 40 mm, with 15 mm free glass edge of hanging stile, pivot point to glass surface 50 mm


Product description Art. No. **Bottom** rail 76.5 mm: Weight in kg/m: 4.219 Aluminum Stainless steel 5.482 *04.039/04.041 ...with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin 76.5 mm: Weight in kg/m: 4.554 Aluminum Stainless steel 5.932 *04.059/04.061

Dimensions in mm. 07/21

^{*}Left / right hand (illustration shows right hand) are determined by view from hanging side.

Product description

Art. No.




Top rail

76.5 mm:

Weight in kg/m:

Aluminum 4.149 Stainless steel 5.449

*04.040/04.042



...with top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

76.5 mm:

Weight in kg/m:

Aluminum 4.484 Stainless steel 5.899

*04.060/04.062

 $^{^{\}star}\mathrm{Left}\,/$ right hand (illustration shows right hand) are determined by view from hanging side.

Door rails for double-action doors

Pivot point 55/65 mm

Complete, for 10 mm glass thickness

53 (63)

Product description

Art. No.

Bottom rail


with stainless steel insert to suit floor spring spindle or round pivot 14 mm \varnothing

76.5 mm:

Weight in kg/m:

Aluminum 4.029 Stainless steel 4.833

04.001




...with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

76.5 mm:

Weight in kg/m:

Aluminum 4.364 Stainless steel 5.283

04.011



...with floor locking lock, prepared for round cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

76.5 mm:

Weight in kg/m:


Aluminum 4.364 Stainless steel 5.283

04.063

142 Dimensions in mm. 12/21

Product description

Art. No.



Top rai


with insert to take 15 mm Ø pivot pin

76.5 mm:

Weight in kg/m:

Aluminum 3.877 Stainless steel 4.681

04.002




....and top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

76.5 mm:

Weight in kg/m:

Aluminum 4.212 Stainless steel 5.131

04.012



...with top locking lock prepared for round cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

76.5 mm:


Weight in kg/m:

Aluminum 4.212 Stainless steel 5.131

04.063

Product description

Glass thickness Art. No.

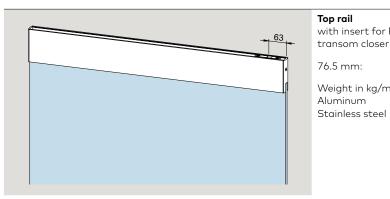

Top rail


with insert for RTS $\,$ transom closer

76.5 mm:

Weight in kg/m:

4.043 4.847

04.006




...and top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

76.5 mm:

Weight in kg/m:

4.378 Aluminum Stainless steel 5.297

04.016



...with top locking lock prepared for round cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

76.5 mm:

Weight in kg/m:

Aluminum 5.145 Stainless steel 6.207

04.067

144

Door rails for double-action doors

Pivot point 18 mm

Complete, for 10 mm glass thickness

16

Product description

Art. No.

Bottom rail


with floor spring spindle insert

76.5 mm:

Weight in kg/m:

Aluminum 4.126 Stainless steel 4.824

04.003




...with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pinn

76.5 mm:

Weight in kg/m:

Aluminum 4.461 Stainless steel 5.274

04.013




...with floor locking lock prepared for round cylinder, single throw (not illustrated) with corrosion resistant bolt and hardened safety roll pin

76.5 mm:

Weight in kg/m:

Aluminum 5.228 Stainless steel 6.280 04.065



Product description

Art. No.


...preprared for floor bearing

76.5 mm:

Weight in kg/m:

Aluminum 3.898 Stainless steel 4.606

04.007



Bottom rail

with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin,


prepared for floor bearing

76.5 mm:

Weight in kg/m:

Aluminum 4.243 Stainless steel 5.056

04.017



...with floor locking lock prepared for round cylinder, single throw with corrosion resistant bolt and hardened safety roll pin,

prepared for floor bearing

76.5 mm:

Weight in kg/m:

Aluminum 4.243 Stainless steel 5.056


04.068

12/21

Dimensions in mm.

Product description

Art. No.



Top rail


with 15 mm Ø pivot pin

76.5 mm:

Weight in kg/m:

Aluminum 3.908 Stainless steel 4.606

04.004




...and top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

76.5 mm:

Weight in kg/m:

Aluminum 4.243 Stainless steel 5.056

04.014



...with top locking lock prepared for round cylinder, single throw with corrosion resistant bolt and hardened safety roll pin

76.5 mm:


Weight in kg/m:

Aluminum 4.243 Stainless steel 5.056

04.066

Radiused edging strip


Acryl, transparent, to clamp onto free glass edge. For optimal pinch protection. For application with door rails with 18 mm pivot point.

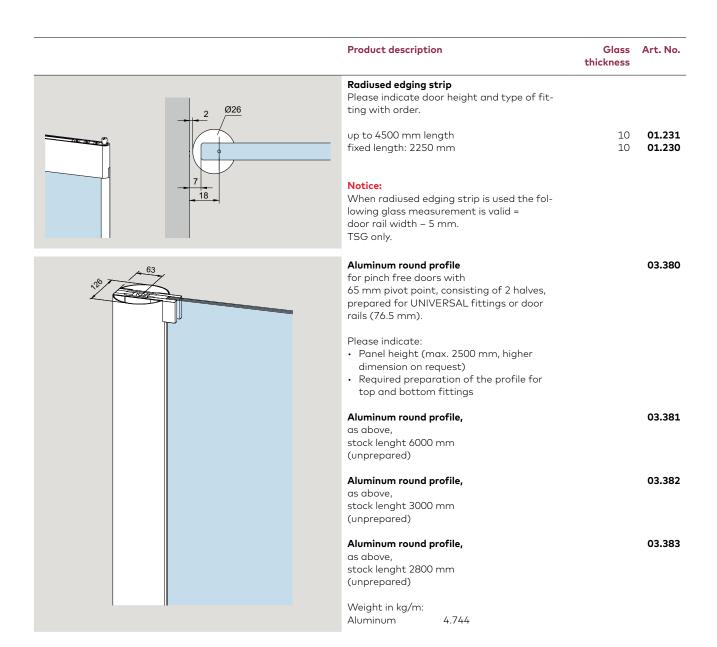

148 Dimensions in mm. 12/21

Rails for side panel


complete, for 10 mm glass thickness

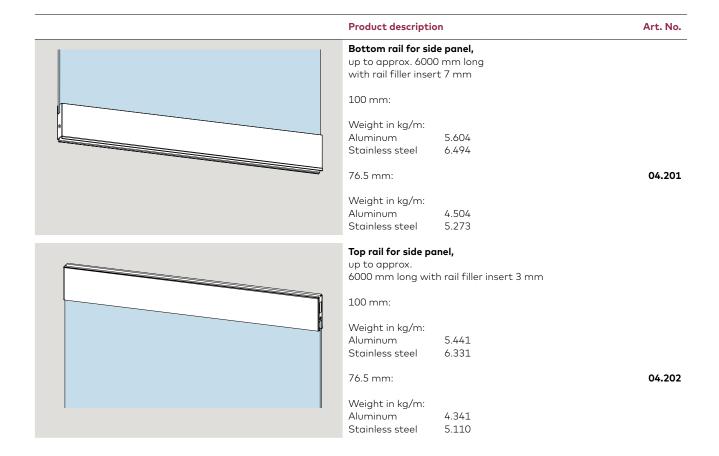

01/22 149

Top centre frame portion

with patch fittings see chapter EA

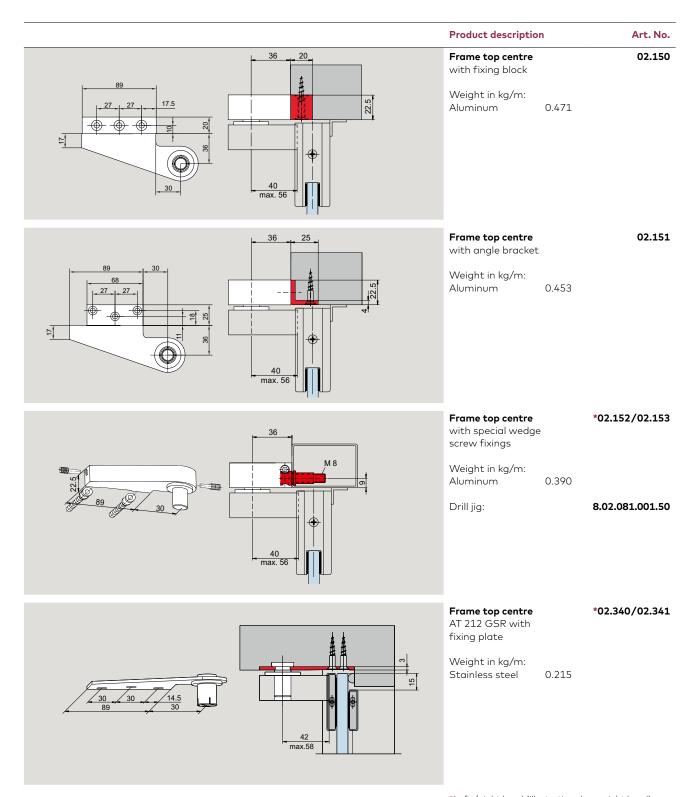

^{*}Left / right hand (illustration shows right hand) are determined by view from hanging side.

150 Dimensions in mm. 12/21


Special accessories and special inserts for door rails

Product description Art. No. Aluminum profile with brush seal 04.600 to prevent draughts and energy loss (not in the area of inserts, locks, etc.), connected with door rail at manufacturer Weight in kg/m: 0.753 **Rubber sealing** for door rails (also in the area of inserts, locks, etc.) fixed length 04.607 stock length 200 m (= 1 coil) 04.608 Weight in kg/m: 0.099 Aluminum round profile for pinch free doors with 65 mm pivot point, consisting of 2 halfs, prepared for UNIVERSAL fittings* or door rails (76.5 mm or 100 mm). Please indicate: · Panel height (max. 3000 mm, higher dim. on request) · Required preparation of the profile for top and bottom fittings fixed length 03.380 Weight in kg/m: 4.744 Aluminum stock length 6000 mm (not prepared) stock length 3000 mm (not prepared) 03.381 03.382 01.136 Screw-on floor bearing for damp environment, without floor recess, with inserts for door rails, max. 80 kg Weight in kg/m: 0.193

Product description

Art. No.






Bottom insert

for floor spring spindle profile or round pivot 14 mm Ø, (floor spring dormakaba BTS or floor bearing

Art. No. 01.106 and 01.107), stainless steel, 55/65 mm pivot point, max. door weight 80 kg

0.243 Weight in kg/m:




Bottom strap,

804.167.001.55

steel, zinc plated, with spindle insert to suit floor springs, 18 mm pivot point, max. door weight 80 kg

Weight in kg/m: 0.349




Bottom strap,

804.060.002.50

aluminum, to suit floor bearings 01.106 and 01.107, 18 mm pivot point, max. door weight 80 kg

Weight in kg/m: 0.129



Bottom strap

04.605

in forged steel special edition, mounted in door rails, to suit floor spring spindles. (Also suitable for floor bearing 04.602, 04.603. Not suitable for floor bearing with round pivot.) For centre hung doors


- · normal frequented doors, max. door weight 150 kg, max. door width 1400 mm
- · high frequented doors, max. door weight 120 kg, max. door width 1200 mm Pivot point either 55 or 65 mm

(please specify with order).

Weight in kg/m: 0.385

Product description


Art. No. 04.610



Top insert

55/65 mm pivot point, Aluminum


Weight in kg/m: 0.091



04.606

Top insert, two part, Aluminum, special, 55/65 mm pivot point not in standard door rail

Weight in kg/m: 0.088




Top insert

04.611

for RTS transom closer, zinc plated steel, 65 mm pivot point

Weight in kg/m: 0.240



Top strap

804.060.001.50

153

Aluminum, 18 mm pivot point

Weight in kg/m: 0.131

Content

MANET Pivoting door system Accessories and connection systems

156 Sets

160 General information

162 Components

164 Connection elements

Glass preparation pivoting door system

226 Safety-related information

All elements up to and including the pull handles are available in an elegant stainless steel finish. All the components are manufactured from the steel grade 1.4305 (approx. AISI 303) for normal interior applications.

Note: The products detailed in this brochure are exclusively intended for glass assemblies that do not require separate building regulations approval.



MANET

MANET sets

The aesthetic elegance of the MANET concept is also available in the form of standardized sets for simple, fast planning of the more popular system types.


Optional accessories enable the individual sets to be semi-customized. The system components offer numerous adjustment possibilities in order to ensure problem-free installation of whichever door type – swing or single-action or double-action – is required. Wall abutment profiles may need to be provided (by others) for fixing overpanels and sidelights.




Pivoting fitting short type,
max. door panel height 2500 mm
max. door panel width 1200 mm
max. door panel weight 80 kg


Pivoting fitting short type with intermediate tube,

max. door panel height 2500 mm max. door panel width 1200 mm max. door panel weight 80 kg




02/22

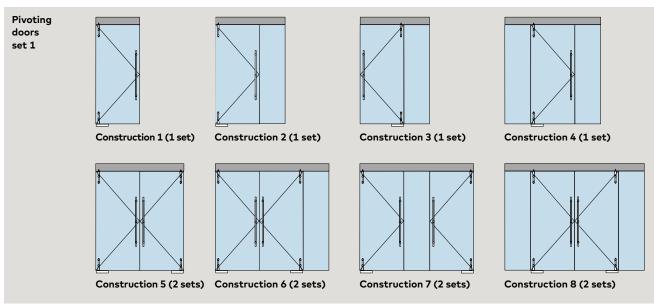

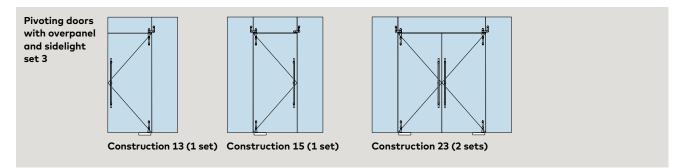


Set 1

Pivoting door MANET without overpanel for 10 – 13.5 mm glass

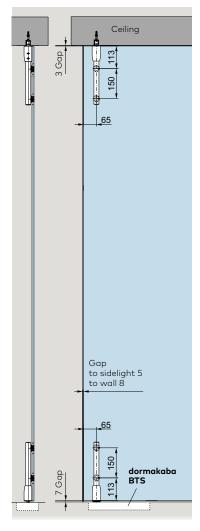

Door weight 80 kg Door height max. 2500 mm Door width max. 1200 mm TSG 10/13.5 mm glass thickness

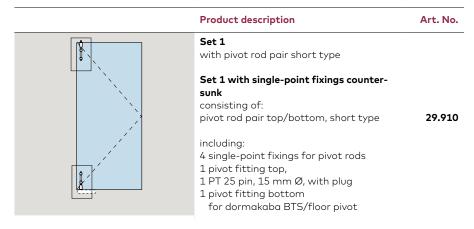


MANET

Accessory options for Set 1


Pull handles	Length	Art. No.
Pull handles	350	29.268
(single-point fixing countersunk)	720	29.271
	1240	29.274
	1760	29.277
Pair of pull handles	350	21.267
	720	21.270
	1240	21.273
	1760	21.276
Lock		
Corner lock		21.448
Corner lock with rose on one lock side		21.449
Profile cylinder for corner lock 21.448/449		14.206
Eccentric bushing for corner lock 21.448/449		05.194
Further accessories		
Stop for pivoting door with ceiling mounting		21.334
Ceiling fixing (bearing function)		29.337
Floor pivot bearing		01.106
Assembling tool for MANET single-point fixings		21.134

Set 3

Pivoting door MANET with overpanel for 10 - 13.5 mm glass

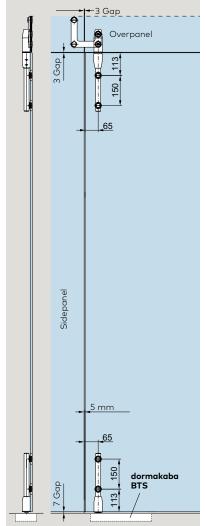

Door weight 80 kg Door height max. 2500 mm Door width max. 1200 mm TSG 10/13.5 mm glass thickness



Product description

Art. No.

29.914

with pivot rod pair short type

Set 3 with single-point fixings coutertsunk

consisting of:

pivot rod pair top/bottom, short type

einschließlich: 4 single-point fixings for pivot rods,

- 1 pivot fitting top,
- 1 overpanel-sidelight connector with pivot bearing location,
- 1 pivot fitting bottom for dormakaba BTS/floor pivot

Accessory options for Set 3

Pull handles	Length	Art. No.
Pull handles	350	29.268
(single-point fixing countersunk)	720	29.271
	1240	29.274
	1760	29.277
Pair of pull handles	350	21.267
	720	21.270
	1240	21.273
	1760	21.276
Ceiling fixing (bearing function)		29.337
Stop at overpanel, (inside/outside) for 10/13.5 mm glass		29.335
Lock		
Corner lock		21.448
Corner lock with rose on one lock side		21.449
Profile cylinder for corner lock 21.448/449		14.206
Eccentric bushing for corner lock 21.448/449		05.194
Further accessories		
Overpanel-sidelight connector for 10/13.5 mm glass		29.320
Floor pivot bearing		01.106
Assembling tool for MANET single-point fixings		21.134

For the requisite glass preparation please see pages 188 – 189


MANET Sets

Space for your notes

Pivoting door system


MANET pivoting doors can be installed in both glass partitions and masonry openings. They come as both single and double-action swing doors. All the single-point fixings are designed for clip-on covers for easier installation. Other components include the bottom pivot bearing, top pivot fittings with bearing spigot or eccentric bushing and also overpanel/sidelight connectors.

As a result, there are almost unlimited possibilities for inte-grating frameless swing doors both in masonry openings – with or without overpanels and sidelights – and in glass partition constructions retained by single-point fixings. Whether with a full-length pivot rod or a pair of shorter pivot rods, the top bearing socket is located in the fitting on the door leaf. This means that connection to the ceiling, lintel or transom can now be provided in the form of the standard PT25 top pivot spigot from the DORMA-Glas range. The door assemblies can be equipped with floor springs such as the dormakaba BTS 75V or BTS 84, and corner locks are naturally also available.




Pivot bearing with full-length pivot rod, max. door panel height 3000 mm max. door panel width 1200 mm max. door panel weight 100 kg


From a door panel height of 2700 mm a fifth single-point fixing is recommended.




Pivot bearing with pivot rod pair short type, max. door panel height 2500 mm max. door panel width 1200 mm max. door panel weight 80 kg



Pivot bearing with pivot rod pair short type with intermediate tube, max. door panel height 2500 mm max. door panel width 1200 mm max. door panel weight 80 kg

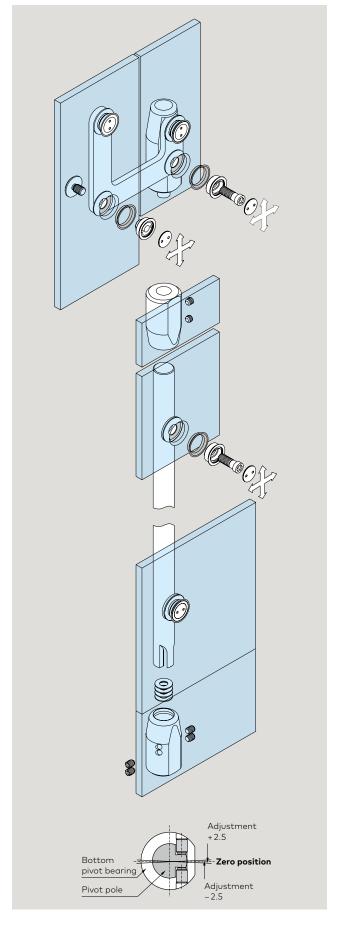


Components for pivoting door system

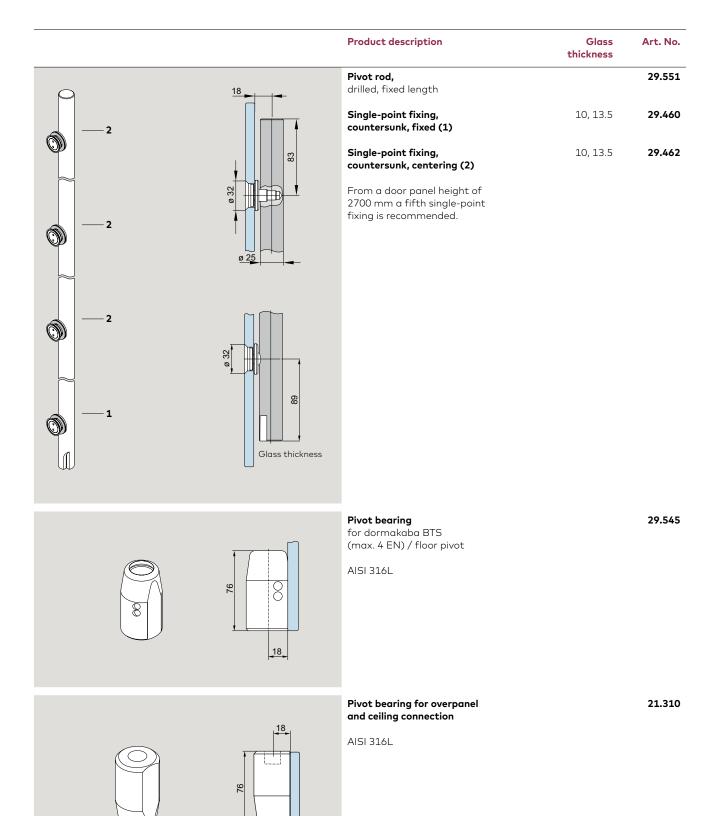

12/21 Dimensions in mm. 161

Components for pivoting door system

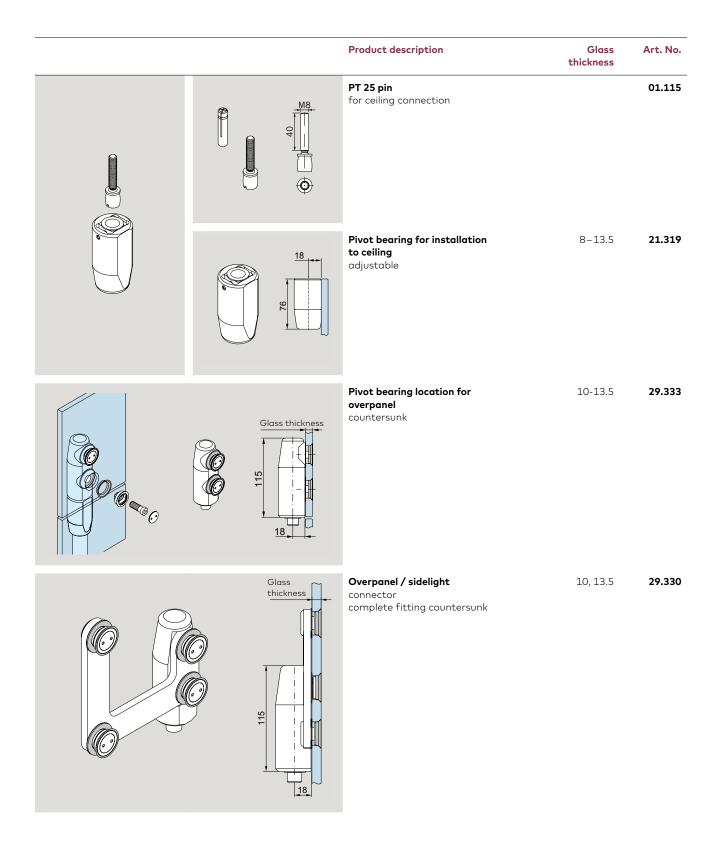


162 Dimensions in mm. 12/21

Glass fixing


Product description Glass Art. No. thickness Overpanel / sidelight connection countersunk 10, 13.5 29.320

120



Stop for pivoting door with ceiling mounting


21.334



Stop at overpanel 10-13.5 29.335 (inside/outside)

Connection elements


Glass fixing

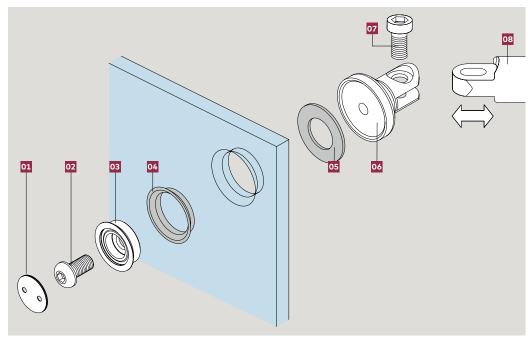


Components

- 01 Clip-on cover
- **02** Connecting bolt
- 03 Conical collar
- **04** Conical sleeve
- **05** Gasket
- **06** Pivoting clamp
- **07** Connecting bolt
- **08** Connecting rod to suit length

Connection ceiling / floor







Components

- **07** Wallplug on site
- **08** Mounting plate, 2-dimensional adjustable
- **09** Threaded rod M8
- 10 Column

Alternative connection ceiling







Components


- rod M8
 DIN 7984
 M10 x..., or
 oval-head
 wood screw
 DIN 7996
 M8 x...
- 12 Clip-on cover

164 01/23

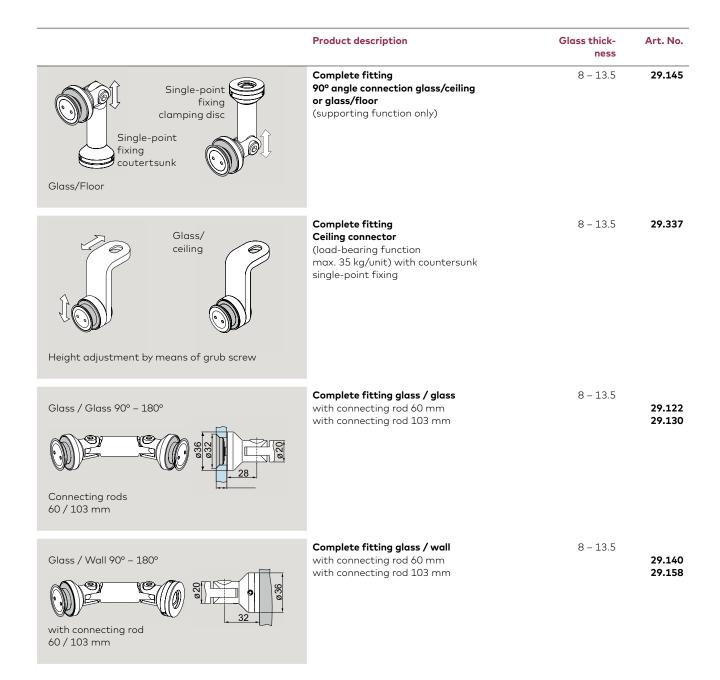


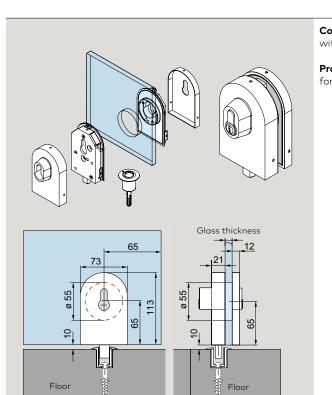

Product description	Glass thickness	Art. No.
Corner lock with profile cylinder rose on inside	8-12	21.449
Profile cylinder for corner lock		14.206




Eccentric bushing 05.194 for corner lock



Strike plate 05.190

166 Dimensions in mm. 12/21


Product description Glass Art. No. thickness



Stop for pivoting door floor mounting


29.950


Glass preparation pivoting door system

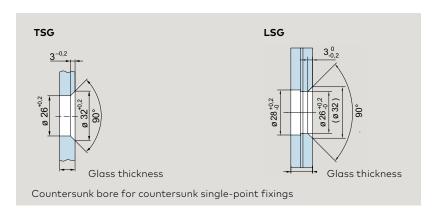



The gap and distance dimensions recommended by DORMA-Glas are indicated in the adjacent table.


Glass thick- ness mm	Connection	X Gap	Y
10/12	Sidelight	5	65
	Wall	8	
13.5	Sidelight	8	62
	Wall	11	









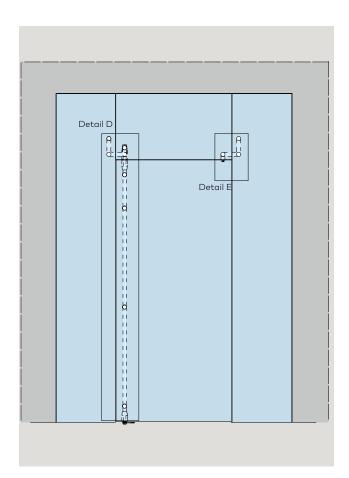

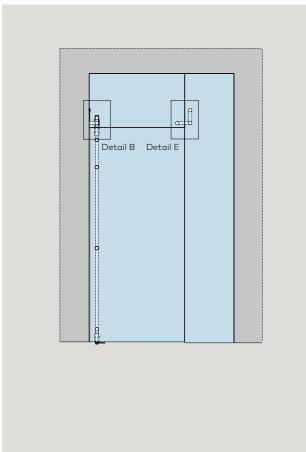


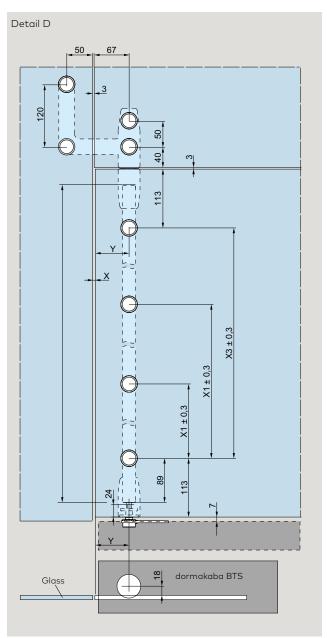




Glass preparation connection system


For TSG and LSG from TSG. Recommended centers for fixed glazing element

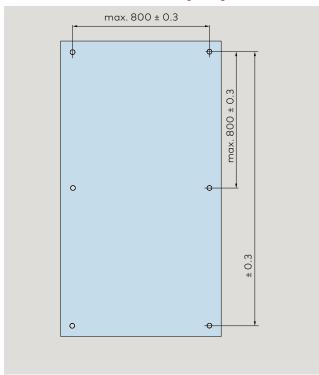


Countersunk bore for countersunk single-point fixings

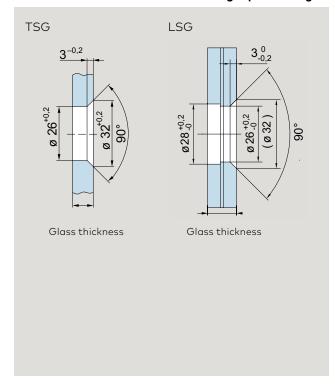

Corner connectors glass / glass 90 – 180°






Corner connectors glass / glass (dimensions in mm)

	60	103	
	Dimensions for 10 mm glass thickness. Consider variants for other glass thicknesses.		
Angle	A/B	A/B	
90°	80	111	
95°	76	105	
100°	71	99	
105°	67	94	
110°	63	90	
115°	60	85	
120°	57	81	
125°	54	78	
130°	51	75	
135°	48	72	
180°	(theo.28)	50	


Length of connecting rod

170 Dimensions in mm. 01/23

Clamping connector

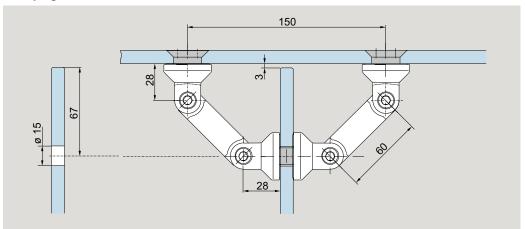


Corner connectors glass / wall 90 - 180°




Glass / wall (dimensions in mm)			
	Length of connecting rod		
	60	82	
	Dimensions for 10 mm glass thickness. Consider variants for		
	other glass thicknesses.		
Angle	A/B	A/B	
90°	72/70	87,5/86	


Corner connector glass / ceiling



Corner connector glass / floor



Ceiling fixing (bearing)



Note: Ensure compliance with minimum glass/bore clearances as per glass manufacturer recommendations. Glass preparation with a tolerance of max. ± 0.3 mm is recommended.

Content

SG

174 General information

174 Components

188 Glass preparation

204 Accessories

226 Safety-related information

172 12/21



SG

A range of locks for all requirements

It doesn't matter what sort of glass door needs securing, what function it has to fulfill, or the type of fittings specified – there will be a lock in the SG range which will provide the shape, the function and the finish which you require.

Simple glass preparation, firm fixing

DORMA-Glas has an intimate knowledge of the special properties of glass as a building material. This has led to the design of locks requiring only simple cut-outs or holes in the glass. Carefully considered and positive measures have been taken to create the maximum clamping surface with optimum clamping efficiency.

Reliability built in

Quality materials and thorough workmanship mean that SG locks have the features necessary to meet the most demanding of specifications. Many satisfied customers will testify this. For safety reasons set lock case always on inside.

Short delivery times

All the common patterns and types are available ex-stock (factory). Special versions are available on request.

UNIVERSAL top, bottom, centre locks and strike boxes with glass cut-outs

Complete, for 10 mm glass thickness

	Product description	on	Glass thickness	Art. No.
164 15 77	throw, bolt project rosettes on both s Suitable gaskets h	profile cylinder, single tion 20 mm, with security sides, 14 mm thick. nave to be used for sys- 12 mm glass thickness.	10	03.206
98 50	EN 1670, class	type-test according to		
	Not illustrated: prepared for roun	d cylinders	10	03.340
	For half profile cyl	linder		
	left hand top/righ	t hand bottom	10	03.288 not illustr.
	left hand bottom/right hand top		10	03.287 not illustr.
	Weight in kg/m: Aluminum Brass Stainless steel	0.942 1.061 1.053		not mosti.
	*Successful type tes 12209:2003 to 2000	ting according to EN 200 movement cycles.		

174 Dimensions in mm. 12/21


03.230

03.128

01.133

01.134

10




Product description Glass Art. No. thickness

GK 30 single overpanel strike box

to suit US 10 corner lock

Weight in kg:

Aluminum 0.418 Stainless steel 0.536




Fixing plate

for overpanel strike box GK 30 UNIVERSAL

Weight in kg:

Aluminum 0.016 Brass 0.038

Stainless steel not available, satin chrome on brass supplied.




Wall anchor

with thread M 8 for overpanel patch

UNIVERSAL

Weight in kg: 0.040




Threaded rod

M 8 with plug for overpanel patch

UNIVERSAL

Weight in kg: 0.032

 $^{^{\}star}\mathrm{Left}$ / right hand (illustration shows left hand) are determined by view from hanging side.



Product description Glass Art. No. thickness

GK 20 double overpanel strike box


10 03.245

to suit US 10 corner locks, consisting of two GK 30 with threaded connecting bolt

Weight in kg:

Aluminum 0.866
Brass 1.154
Satin stainless steel (700) 1.200

Suitable for glass thicknesses up to max. 12 mm. If thicker glass is required, please talk first to our Applications Engineering people.




GK 20 03.247

with stop

Weight in kg:

Aluminum 0.926 Brass 1.234 Satin stainless steel (700) 1.192

Suitable for glass thicknesses up to max. 12 mm. If thicker glass is required, please talk first to our Applications Engineering people.




GK 40 03.250

corner overpanel strike box to suit US 10 corner lock

Weight in kg:

Aluminum 0.709 Brass 1.035 Stainless steel 1.010



GK 41 strike box *03.194/ for PT 41, with fin fitting 03.193

Weight in kg:

Aluminum 0.906 Stainless steel 1.270

176 Dimensions in mm. 12/20

 $^{^{\}star}\mathrm{Left}\,/$ right hand (illustration shows left hand) are determined by view from hanging side.


GK 41 strike box Weight in kg: Aluminum Stainless steel

Product description Glass Art. No. thickness

03.195

with fin fitting on both sides

1.103 1.411




GK 42 strike box, *03.274/ angle 90°, for PT 42, 03.275 with stop inside

Weight in kg:

Aluminum 0.910 Stainless steel 1.306

Not illustrated: *03.276/ GK 42, angle 135° 03.277

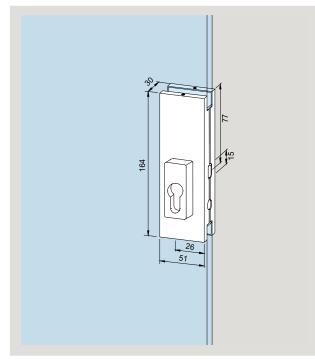

US 20 centre lock, 10

prepared for Europrofile cylinder, single throw, bolt projection

20 mm, with security rosettes 14 mm thick.

Weight in kg:

0.942 Aluminum Brass 1.061 Stainless steel 1.053

Lock insert:

- high corrosion resistance
- according to EN 1670, class 4
- with regard to type-test according to EN 12209:2003**

Weight in kg:

0.805 Aluminum Stainless steel 0.925

prepared for round cylinder


03.345 not illustr.

03.215

Prepared for one-sided Europrofile cylinder (see drawing 03.215)

*03.290/ 03.289

- $^{\star}\,$ Left / right hand (illustration shows left hand) are determined by view from hanging side.
- ** Successful type testing according to EN 12209:2003 to 200000 movement cycles.



Glass Art. No. Product description thickness

10

03.224

GK 50 strike box


to suit US 20 centre lock

Weight in kg: Aluminum 0.602 0.730 Brass Stainless steel 0.727

178 12/18 Dimensions in mm.

Corner (OR centre) locks and strike boxes with drilled holes glass preparation

Complete for 8, 10 and 12 mm glass thickness

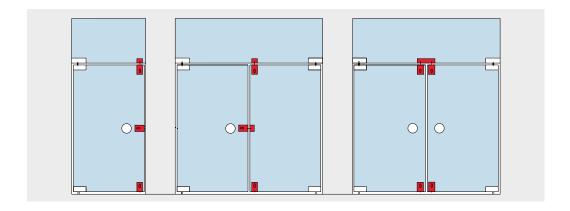



Art. No. 05.100

Corner lock,

for vertical or horizontal fixing, double throw, bolt projection 20 mm, hardened oval bolt, prepared for Europrofile cylinder

Weight in kg:

0.849 Aluminum 1.033 Brass

prepared for round cylinders 05.105 not illustr.

Weight in kg:

Aluminum 0.842 Brass 1.020


Prepared for one-sided Europrofile cylinder, 05.116

lockable from inside

not illustr.

Weight in kg:


0.858 Aluminum 1.038 Brass




05.118



Aluminum 0.924 Brass 1.236





Product description

Art. No.

Corner lock,

05.103

for vertical fixing, double throw, bolt projection 20 mm, hardened oval bolt, counterplate shortened to give 15 mm free glass edge, prepared for Europrofile cylinder

Weight in kg:

Aluminum 0.807

Prepared for one-sided Europrofile cylinder, **05.117** lockable from inside not illustr.

Weight in kg:

Aluminum 0.818 Brass 0.984

Prepared for Europrofile cylinder, rose inside **05.119**

not illustr.

Weight in kg:

Aluminum 0.882 Brass 1.184



05.108

to suit corner lock (05.100, 05.105, 05.116), for single and two panel doors without stop

Weight in kg:


Aluminum 0.260 Brass 0.765

with stop for Art. No. 05.103, 05.117, 05.119

05.109 not illustr.


Weight in kg:

Aluminum 0.264 Brass 0.760




Corner and centre locks without glass preparation

Complete, for 10 and 12 mm glass thickness

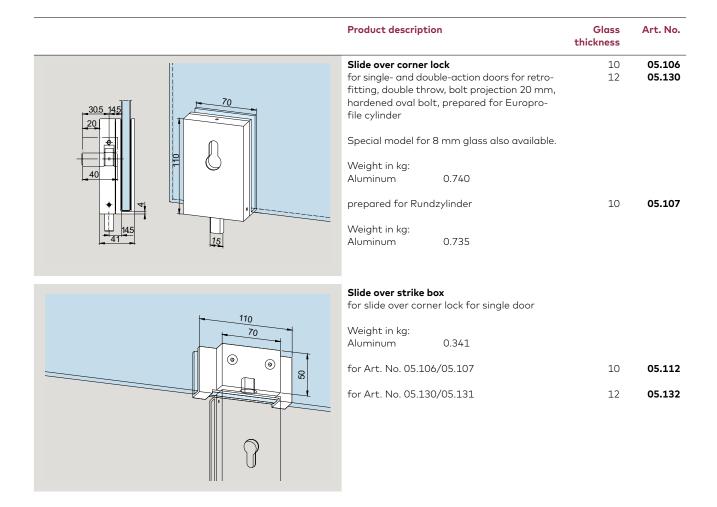

Centre locks and strike boxes

Complete, for 10 mm glass thickness

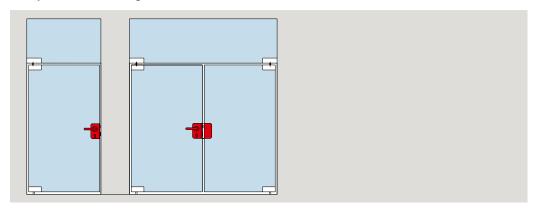

Centre locks and strike boxes with drilled holes glass preparation

Product description

Art. No.


*11.220/11.221

Centre lock

for single-action door (with free glass edge), prepared for Europrofile cylinder, double throw

Weight in kg:

Aluminum 1.060

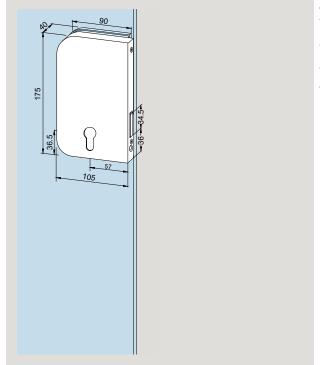

182

Product description

Art. No.

*11.224/11.225

Centre lock

for single-action door (with free glass edge), with both latch and lock bolt, prepared for lever on round rose inside, smooth blanking plate outside,

prepared for Europrofile cylinder, double throw

Weight in kg:

Aluminum 1.175

*11.203/12.207

Strike box


to suit centre locks for: Art. No. 11.224, 11.225 Art. No. 11.220, 11.221

Weight in kg:

Aluminum 0.945



11.226




Lever handle, for inside

to suit centre locks for: Art. No. 11.224, 11.225, Art. No. 11.254, 11.255


Weight in kg:

Aluminum 0.195



If used on glass doors in rebated frames and for 10 mm glass thickness, a minimum of 26–28 mm frame depth is needed.

 $^{^{\}rm t}{\rm Left}\,/$ right hand (illustration shows left hand) are determined by view from hanging side.

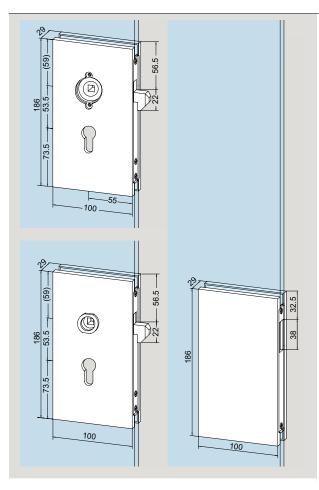

Product description

Art. No. 05.200

Hook lock

for sliding doors, nightlatch function, suitable for **aluminum lever handles with round roses** (10.307), prepared for Europrofile cylinder, left hand and right hand, with lock keeper plate

Weight in kg:

Aluminum 1.325

Suitable for lever handles with follower

05.202

.....

Weight in kg:
Aluminum 1.325


Strike box 05.201

to suit hook lock, (05.200, 05.202), non-handed

Weight in kg:

Aluminum 0.890

184

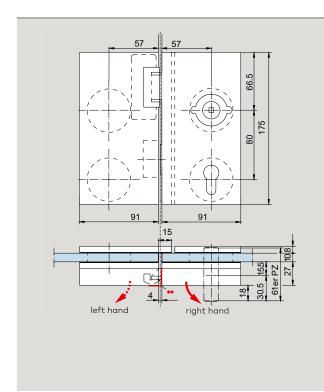

Product description

Art. No.

*05.224/05.225

Centre lock

with latch and lock bolt, for inward opening single-action doors, prepared for lever on round rose inside, smooth blanking plate outside, prepared for Europrofile cylinder

Weight in kg:

Aluminum 1.090

Suitable lever handle

11.226

see page 183

*05.228/05.229 Centre lock

with latch and lock bolt, for inward opening single-action doors, prepared for rose lever on both sides, prepared for Europrofile cylinder

Weight in kg:

Aluminum 1.090

Strike box,

*05.226/05.227

to suit centre lock with latch and lock bolt, with electric strike release (Standard: fail secure function, 6 to 12 V -/~, with mechanical unlock. Further types on request.) (for Art. No. 05.224, 05.225)

Weight in kg:


Aluminum 0.595

*05.218/05.219

Angle bracket

for centre locks (opening to outside)

Weight in kg: 0.040

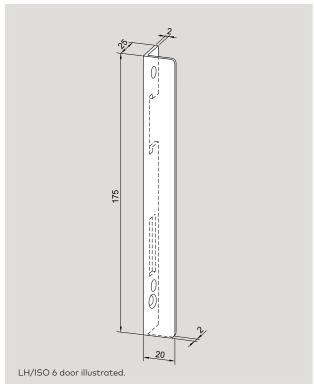

^{*}Left / right hand are determined by view from hanging side.
**Angle bracket (05.218/05.219) for door opening outwards (optional)

Locks with panic function, opening to outside

for 8 and 10 mm glass thickness

Operation outside: Bolt is unlocked by turn of key, and latch is withdrawn by follower.

Operation inside: Lock can be operated by rose lever handle even when bolt is locked.


Not for emergency exit doors according to German Standard DIN EN 179 or DIN EN 1125 (corresponding modifications in preparation)

For best protection against burglary we recommend the use of the angle bracket (05.218/05.219)

Product description

Art. No.

*05.240/05.241



Centre lock

with both latch and lock bolt, **rose lever on inside** and fixed knob (without function) on outside. Prepared for Europrofile cylinder with roses

Weight in kg:

Aluminum 1.706

Please use strike box 11.206/11.207.

For strike boxes with electric strike release

Centre lock

*05.244/05.245

with both latch and lock bolt, with angled cover, for door opening outwards (not shown), **rose lever on inside** and fixed knob (without function) on outside. Prepared for Europrofile cylinder with roses.

Lockable into strike boxes with electric strike release for Art. No. 05.226/05.227

Weight in kg:

Aluminum 2.900

*Left / right hand are determined by view from hanging side.

Additional exit devices for glass doors with panic function covered by approval certification can be found in the technical documentation of PHA 2000 and Exit Pad

for 8 and 10 mm glass thickness

Operation outside: Bolt is unlocked by turn of key, and latch is withdrawn by follower.

Operation inside: Lock can be operated by rose lever handle even when bolt is locked.


For emergency exit doors according to German Standard DIN EN 179.

SG

Product description

Art. No.

*05.250/05.251




Centre lock OFFICE Junior SVP 5000 with both latch, lock bolt self-locking function rose lever on inside and fixed knob

(without function) on outside. Prepared for Europrofile cylinder with roses

Weight in kg:

Aluminum 1.706

*05.252/05.253



Strike box for self-locking panic lock 05.250/05.251

Weight in kg:

Aluminum 1.486


Please note

For frame applications with 8 mm TSG a rebate depth of min. 26 mm required. With 10 mm TSG, a fold depth of of at least 28 mm required.

*Left / right hand are determined by view from hanging side.

Additional exit devices for glass doors with panic function covered by approval certification can be found in the technical documentation of PHA 2000 and Exit Pad

Glass preparation locks

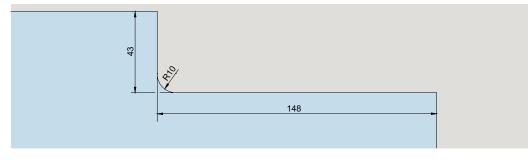

161 148 68

US 10


Corner locks Art. No. 03.206, 03.285, 03.287, 03.288, 03.340


Scale 1:2

GK 30 (PT 30)

Single overpanel strike box Art. No. 03.230,

Scale 1:2

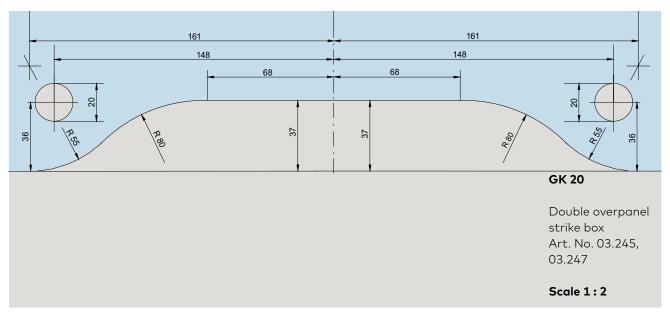


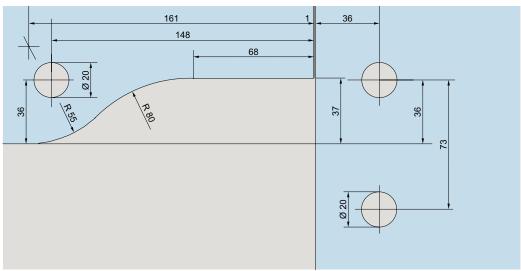

GK 40 (PT 40)

Corner overpanel strike box Art. No. 03.250,

Scale 1:2

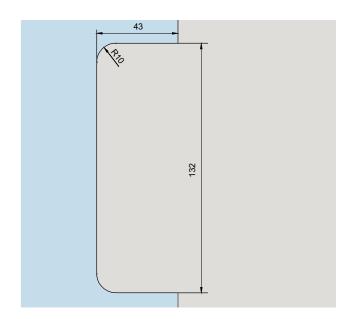

US 20, GK 50


Centre lock

Art. No. 03.215, 03.289, 03.290, 03.345 and strike box for centre lock

Art. No. 03.224

Scale 1:2


Glass preparation for corner, centre locks and strike boxes, requiring drilled holes



Corner locks

Art. No. 05.100, 05.103, 05.105, 05.116, 05.117, 05.118, 05.119


Scale 1:2



Strike boxes

Art. No. 05.108, 05.109

Scale 1:2

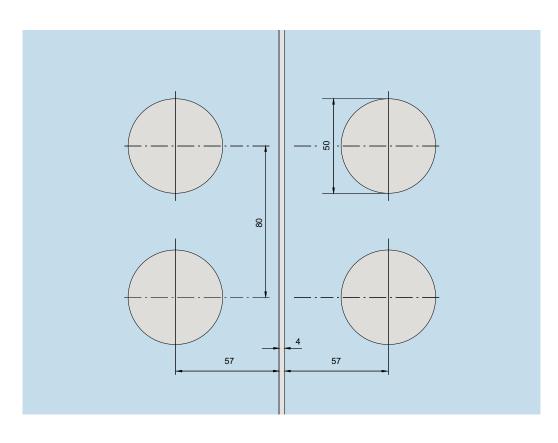


Centre locks with latch and lock bolts, and strike boxes

Art. No. 05.224, 05.225, 05.226, 05.227, 05.240, 05.241, 05.244, 05.245, 05.250, 05.251, 05.252, 05.253

Scale 1:2

190 Dimensions in mm. 01/22

Glass preparation for centre locks and strike boxes, requiring drilled holes




Centre locks

Art. No. 05.250, 05.251, 11.216, 11.217, 11.220, 11.221, 11.224, 11.225

Strike boxes for centre locks

Art. No. 05.252, 05.253, 11.206, 11.207

Scale 1:2

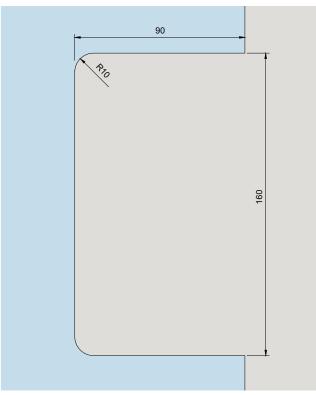

Centre locks with nightlatch function, hook bolts and strike boxes

Art. No. 05.200, 05.201, 05.202

Scale 1:2

Content

Wall connection profile

194 General information

195 Components

204 Accessories

226 Safety-related information

192 12/21




Wall connection profile

Wall connection profiles

Consisting of: base profile, with bore holes (every 300 mm), incl. clamping parts with screws and gasket strips.

Application:

e. g. all around frame system for thoughened glass assemblies, with fittings on sides and ceiling. The safety type prevents free hanging glass elements from falling down, by fixing the clamping fitting through glass holes. 15 kg load for each clamping part, torque for fixing screws 15 Nm (M 6 = Allan key size 4).

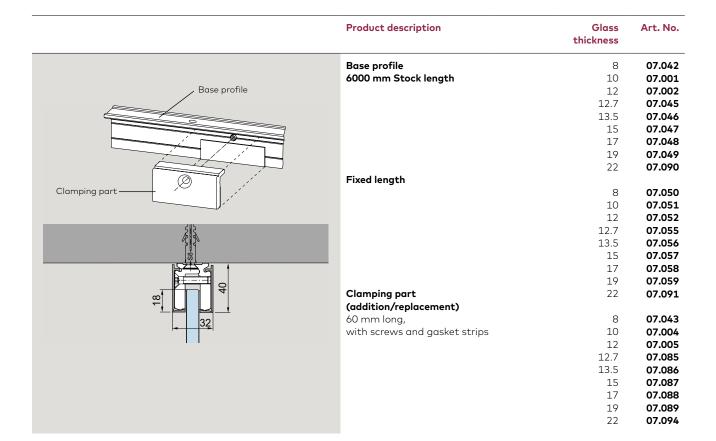

Art. No.

Glass

Product description

Components

Safety type thickness 07.060 Base profile as safety type 8 6000 mm Stock length 10 07.061 Base profile as safety type 8 07.066 Fixed length 07.067 10 Weight in kg/m: Aluminum 1.200 Clamping part (addition/replacement) 8 07.063 07.064 for Safety type 10 Clamping part for safety type 60 mm long, with screws and gasket strips Glass preparation for Safety type 150* ±0,5 300 ±0,5 300 ±0,5 *If glass and profile are aligned. $n * 300 + 150 \pm 0.5$ 150 ±0.5 Initial reference edge

	Product description	Glass thickness	Art. No.
968	Clip on cover profile stainless steel, satin available Weight in kg/m: Aluminum 0.216 Stainless steel 0.366 6000 mm stock length fixed length		07.003 07.053
	End cap		
00	Weight in kg/pc: Aluminum 0.003 Brass 0.090 Stainless steel 0.090	8 and 10	07.007
32/25 7	Aluminum 0.003 Brass 0.010 Stainless steel 0.010	12-13.5	07.044
due to glass thickness	Aluminum 0.003 Brass 0.011 Stainless steel 0.012	15-19	07.065
	Filler block, 10 x 12 mm		
10 07.006	6000 mm stock length fixed length Weight in kg/m: Aluminum 0.325		07.006 07.054
	U-profile 20 x 20 x 20 x 2 mm		
8	6000 mm stock length fixed length Weight in kg/m: Aluminum 0.304		07.092 07.093
000	U-profile 30 x 20 x 30 x 2 mm 6000 mm stock length fixed length Weight in kg/m: Aluminum 0.304		07.097 07.096

Space for your notes

Content MR 22/MR 28

200 Components

204 Accessories

226 Safety-related information

198 12/21



MR 22/MR 28

Wall connecting frame system MR 22 and MR 28

Comprising a frame profile (series-drilled), a clamping profile and two contact rubber extrusions (PVC, grey).

These decorative and elegant frame solutions are characterised by their remarkably easy installation. The viewface width in the case of the MR 22 is a mere 22 mm and in the case of the MR 28 it is just 28 mm. Suitable for glass thicknesses of 8 and 10 mm. No load transfer by the profiles. Can be readily

MR 22

max. glass dimensions: height: 2500 mm width: 1000 mm removed and re-installed elsewhere. The MR 28 features an additional screw-fixing channel for connecting angle brackets and enables combination with mullion profiles for the vertical connection of several glass panels and also abutment to frame systems AT 44 and AT 50.


Applications:


e.g. surrounding frame for toughened glass systems for fixing to walls and ceilings

MR 28

max. glass dimensions: height: 2800 mm width: 1000 mm

Base profile MR 22




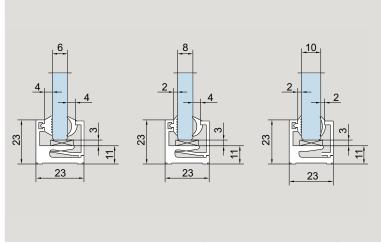

Features and data MR 22 in 6000 mm stock length, without PVC profile Weight in kg/m: Aluminum 0.648 MR 22 in fixed length Weight in kg/m: Aluminum 0.648


200 Dimensions in mm. 05/18

Base profile MR 28



Attention:

Profiles are only delivered with straight cuts. Allowances in lengths of profiles to ensure producibility of bevel cuts have to be planned by the customer. The georgian bar profile must be prepared in addition on both sides. Please consider installtion instruction

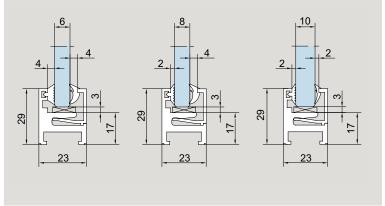


Features and data

Art. No. 07.241

07.251

07.242

07.252




MR 28

in 6000 mm stock length, without PVC profile

Weight in kg/m:

Aluminum 0.802




MR 28

in fixed length

Weight in kg/m:

Aluminum 0.802




Georgian bar profile MR 28

in 6000 mm stock length, without PVC profile

Weight in kg/m:

Aluminum 0.542




Georgian bar profile MR 28


in fixed length

Screws for fixation at MR 28 base profile are nor included in delivery.
Recommendation: counter sunk screw
4.2 mm x 32 mm

Weight in kg/m:

Aluminum 0.542

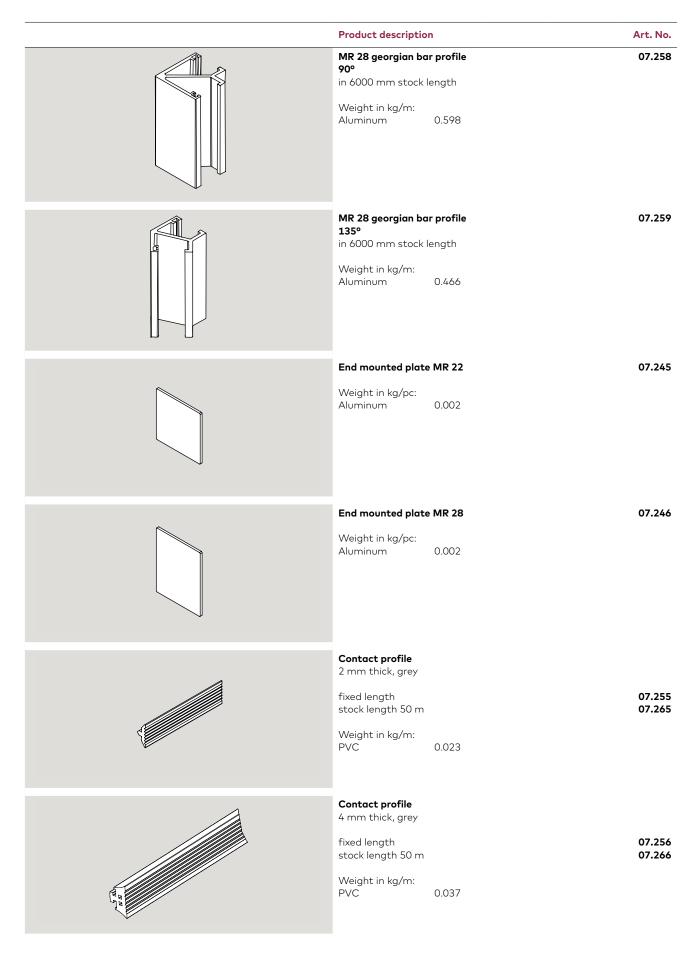

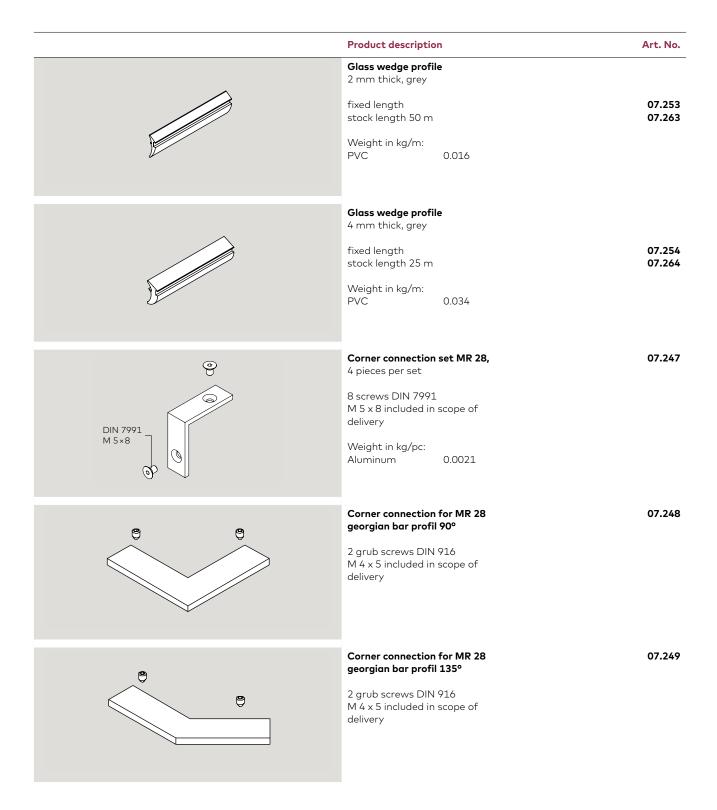

Content

Accessories

20/	Top bearings, pivots
209	Floor bearings, lock keeper plate, floor sockets
210	Wall connection and cylinders
211	Profiles for UNIVERSAL
212	Gaskets
214	Clamping fittings
216	Accessories for door closer
218	Handle bars, door knobs, recessed pull grips
226	Safety-related information

204 12/21



Accessories

Perfection in detail

Original accessories for patch fittings, door rails and locks, matched to the DORMA-Glas product range, are available.


They ideally complement the range of DORMA-Glas hardware to optimise the technical excellence and cost effectiveness of toughened glass systems of all types.

Aside from functional components such as special floor pivots – including models for wet rooms – DORMA-Glas also offers a choice of security-relevant options. Their installation further enhances the exceptional functional efficiency, reliability and long service life expected of DORMA-Glas systems.

206 11/17

Top bearing, pivots for UNIVERSAL, BEYOND, EA, TP/TA, MANET

Advisory: Please note that the upper pivots for UNIVERSAL and those for MUNDUS are not mutually compatible. The spigot diameters of the MUNDUS fittings vary.

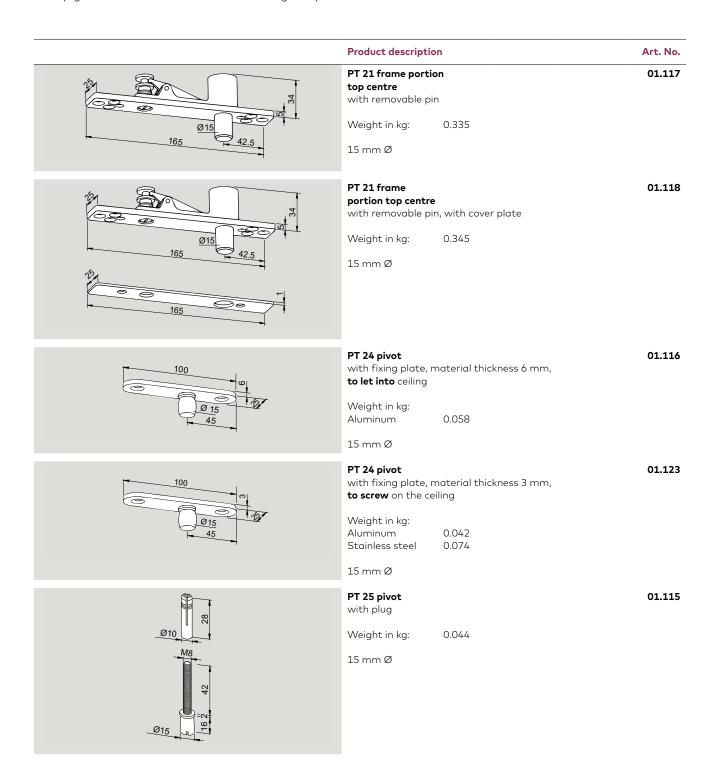

12/21 Dimensions in mm. 207


Product description Art. No. Top pivot bearing, 01.129 brass, nickel plated, for installation in frame or ceiling for 15 mm Ø pivot pin Weight in kg: 0.065 Top pivot bearing 01.130 aluminum, for installation in frame or ceiling for 15 mm \emptyset pivot pin Weight in kg: 0.018 Top pivot bearing 01.131 with steel fixing plate, 150 for 15 mm Ø pivot pin Weight in kg: 0.160 Ø 15 39 01.132 Top pivot bearing with aluminum fixing plate, for 15 mm Ø pivot pin Weight in kg: 0.099

208 Dimensions in mm. 11/17

Floor bearing, lock keeper plate, floor socket for UNIVERSAL, BEYOND, EA, TP/TA, MANET

Product description

Art. No.




Floor pivot bearing

01.106

with round pivot 14 mm Ø, and cover plate; height adjustable by 5 mm max. door weight 100 kg

Weight in kg:

Aluminum 0.155 Brass 0.170 0.169 Stainless steel




Floor pivot bearing

01.107

with round pivot 14 mm \varnothing and pin 24 mm \varnothing max. door weight 100 kg

0.078 Weight in kg:



Floor bearing

04.602


04.603

with profile spindle (longer spindle on request),

max. door weight 200 kg

Stainless steel, max. door weight 200 kg

0.254 Weight in kg:




Floor pivot bearing for damp environments,

01.137

with insert for UNIVERSAL PT 10 for mounting onto floor surface max. door weight 80 kg

Weight in kg: 0.195




Lock keeper plate,

05.190

stainless steel, two parts, adjustable ± 5 mm

0.048 Weight in kg:



Floor socket,

05.192

05.193

zinc coated brass for lock bolt

0.020 Weight in kg:

Floor socket, aluminum, with spring and plastic stopper,

dirt protection

Weight in kg: 0.026

Eccentric socket, eccentric, zinc coated brass, 05.194

with adjustable plastic socket insert


Weight in kg: 0.020

Wall connection and cylinders for UNIVERSAL, BEYOND, EA, TP/TA, MANET

Product description

Art. No. 01.127

01.133




Fixing plate

for overpanel patches from UNIVERSAL, EP and EA program

Weight in kg:

0.019 Aluminum 0.045

Stainless steel not available, satin chrome on brass supplied.




Wall anchor

for overpanel patches from UNIVERSAL, EP and EA

program with thread M 8


Weight in kg: 0.040



01.134 Threaded rod for overpanel patches from UNIVERSAL, EP and EA

program M 8 with plug

0.032 Weight in kg:



Profile cylinder

length 61 mm, differently keyed, with Logo


05.001

Profile cylinder

length 61 mm, equally keyed, with Logo

05.002

05.003



Half-profile cylinder

length 31 mm, differently keyed, with Logo

05.004 Half-profile cylinder

length 31 mm, equally keyed, with Logo


12/20 210 Dimensions in mm.

Profiles for UNIVERSAL

Product description

Art. No.

01.230



Aluminum round profile

for pinch free doors with

65 mm pivot point, consisting of 2 halves, prepared for UNIVERSAL fittings or door rails (76.5 mm or 100 mm).

Please indicate:

- Panel height (max. 2500 mm, higher dim. on request)
- Required preparation of the profile for top and bottom fittings


 Fixed length
 03.380

 Stock length 6000 mm
 03.381

 Stock length 3000 mm
 03.382

Weight in kg/m:

Aluminum 4.744



Radiused edging strip (only for 10 mm TSG)

for fittings with $15\ \text{mm}/18\ \text{mm}$ pivot point. For pinch free doors, (strip is clamped onto free glass edge), Acrylic.

Length: up to 4500 mm (specify height)

Lenght: 2250 mm **01.231**

Weight in kg/m: 0.408

01/20 Dimensions in mm. 211

Gasket sets for UNIVERSAL

Product description	Art. No.	Product description	Art. No.
Gasket sets for 12 mm glass thickness		Gasket sets for 8 mm glass thickness	
for PT10/20/22/29/30/GK30	03.900	for PT10/20/22/29/30/GK30	03.920
for US 10/20/GK50	03.901	for US 10/20/GK50	03.921
for PT40/41/42/GK40/41/42	03.902	for PT40/41/42/GK40/41/42	03.922
for PT51	03.903	for PT51	03.923
for PT60/61/62	03.904	for PT60/61/62	03.924
for PT70/71	03.905	for PT70/71	03.925
for PT80/81	03.906	for PT80/81	03.926
for PT80 semi-high	03.907	for PT80 semi-high	03.927
for PT90/91	03.908	for PT90/91	03.928
for sidelight connector 01.153	03.909	for sidelight connector 01.153	03.929

 $\textbf{Note:} \ \textbf{All fittings with a 15 mm pivot point are technically only designed for 10 mm glass thickness !}$

212 12/21

Space for your notes

Clamping fittings

53


Product description

Art. No. 07.021

PT 90 Srew on fitting

Weight in kg:

Aluminum 0.120 Brass 0.160 Stainless steel 0.155




PT 91 corner fitting

07.023

01.153

Weight in kg:

Aluminum 0.120 Brass 0.160 Stainless steel 0.155




Side connector

with fixing plate

Weight in kg: Aluminum

Aluminum 0.313 Stainless steel 0.376

Also suitable for 12 mm glass thickness



Overpanel-sidelight connector

12.536


Weight in kg:

Aluminum 0.146

214 Dimensions in mm. 11/17




Usage and assembly of fins



Fin fittings and corner connectors do not have a supporting structure. Overpanels, side-lights and fins have to be fixed securely to the ceiling by DORMA-Glas wall connecting profiles or similar systems.


The need for stiffeners and the requisite glass thickness must be specified by a properly qualified structural engineer.


Accessories for door closer dormakaba TS 73 V

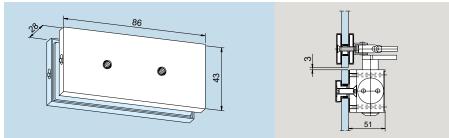

B 45 86 × 43 mm Overpanel 80 × 43 mm Overpanel 50 50.5

105

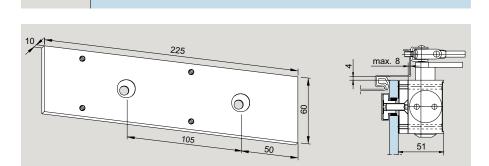

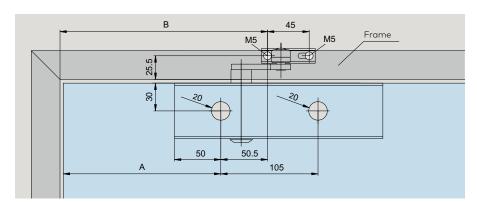

Fixing plate

for dormakaba TS 73 V, closer arm for overpanel

Art. No. 12.330

Weight in kg:

Aluminum 0.132

Pivot point fitting	Α	В
EA (AT)	195	248
UNIVERSAL/EP/ MUNDUS	245	298
STUDIO/JUNIOR	170	223
UNIVERSAL Arcos	262	315

Fixing plate

225 mm, for dormakaba TS 73 V


Art. No. 12.335

Weight in kg

Aluminum 0.289

Pivot point fitting	Α
EA (AT)	195
UNIVERSAL/EP/ MUNDUS	245
STUDIO/JUNIOR	170
UNIVERSAL Arcos	262

Door closer dormakaba TS 97

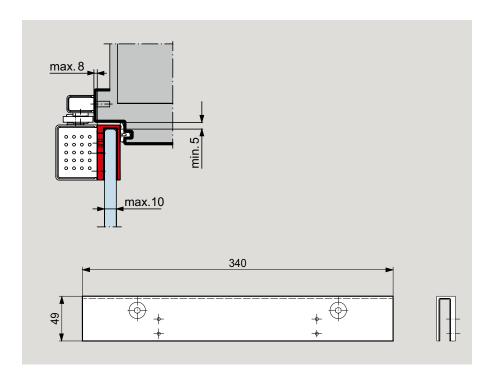

dormakaba TS 97 including saddle plate

For connecting the closer to toughened glass doors – no glass recess machining or drilling required.
The dormakaba TS 97 with this special glass fixing bracket should be used with STUDIO Arcos and OFFICE Arcos/OFFICE Junior hinges.

Pull handles, door knobs and recessed pull grip

The pull handle/knob system is designed for glass of 8, 10 and 12 mm thickness.

The pull handles can be fixed to both sliding and pivoting (swing) doors on one face using the appropriate connectors or on both faces by through-bolting (back-to-back arrangement).

Due to a flat structure recessed pull grips are also suitable for sliding doors.


The single-point fixings and through bolts are included as standard equipment in the scope of supply.

The pull handles can be fitted horizontally, vertically or in a handrail arrangement.



218 11/17

Pull handle pairs

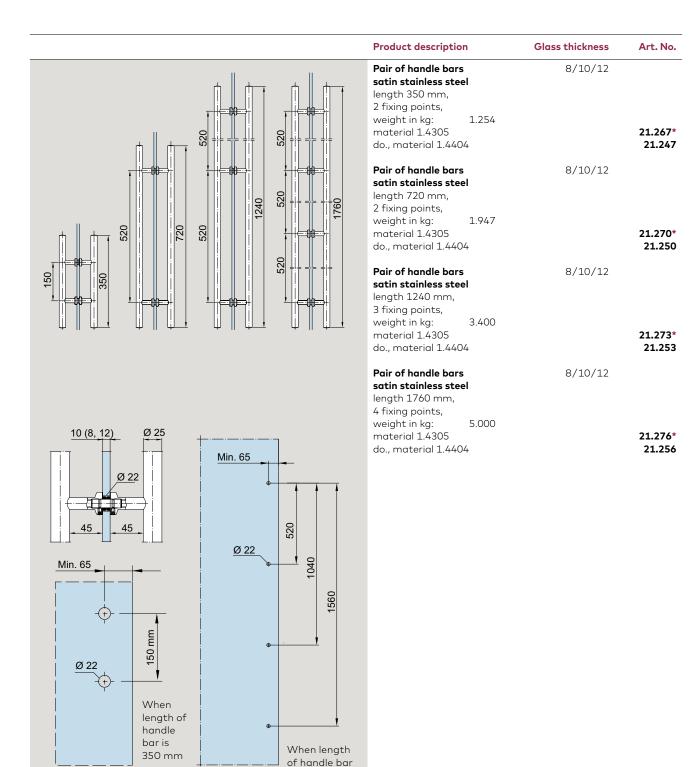



^{*} Conversion sets for back to back pull handles for timber doors resp. other glass thicknesses see unter "Spacing adjustment for pull handles and door knobs", page 221.


is 1760 mm

Pull handles single

Product description	Glass thickness	Art. No.
Pull handles with single-point fixings, countersunk stainless steel Pull handle 350 mm with 2 fixings, material 1.4305 do., material 1.4404 Pull handle 720 mm with 2 fixings, material 1.4305 do., material 1.4404 Pull handle 1240 mm with 3 fixings, material 1.4305 do., material 1.4404 Pull handle 1760 mm with 4 fixings, material 1.4305 do., material 1.4404	8/10/12	29.268 29.269 29.271 29.272 29.274 29.275 29.277 29.278
Pull handles with single-point fixings, clamping disc Pull handle 350 mm with 2 fixings, material 1.4305 Pull handle 720 mm with 2 fixings, material 1.4305 do., material 1.4404 Pull handle 1240 mm with 3 fixings, material 1.4305 Pull handle 1760 mm with 4 fixings, material 1.4305 do., material 1.4404	8/10/12	21.240 21.241 21.281 21.242 21.243 21.283

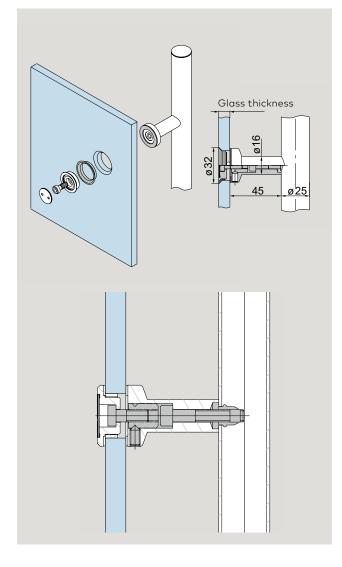






Spacing adjustment for pull handles and door knobs


		Product description	Door thickness	Art. No.
*		Conversion set 1 for glass doors, pair of pull handles / knob back-to-back	13.5 – 21.5	21.285
Distance washer 2 mm		without distance washer with 1 distance washer with 2 distance washers with 3 distance washers with 4 distance washers	13.5 15 17.5 19 21.5	
		Conversion set 2 for timber doors, pair of pull handles / knob back-to-back	20 – 40	21.286
Distance washer 5 mm		without distance washer with 1 distance washer with 2 distance washers with 3 distance washers with 4 distance washers	20 25 30 35 40	
Distance washer 5 mm		Conversion set 3 for glass / timber doors*, pair of pull handles / knob back-to-back, countersunk 15 - 40 mm glass /		21.287
Set 3	Set 4	Conversion set 4 for glass / timber doors*, pair of pull handles / knob back-to-back, clamping disc 15 - 40 mm glass / timber thickness		21.288
		Conversion set 5 for glass doors*, recessed pull grip 13.5 - 21.5 mm glass thickness		21.295
		Conversion set 6 for timber doors*, recessed pull grip 20 - 40 mm timber thickness		21.296
Set 5	Set 6			
		Conversion set 7 for glass / timber doors*, for pull handles fixed on both sides to pull handle fixed on one side, countersunk 8 - 40 mm glass / timber thickness 1 set per pull handle fixing		21.297
9 0 9 Set 7	9 0 9 Set 8	Conversion set 8 for glass / timber doors*, for pull handles fixed on both sides to pull handle fixed on one side, clamping disc 8 - 40 mm glass / timber thickness 1 set per pull handle fixing		21.298

Pair of pull handles

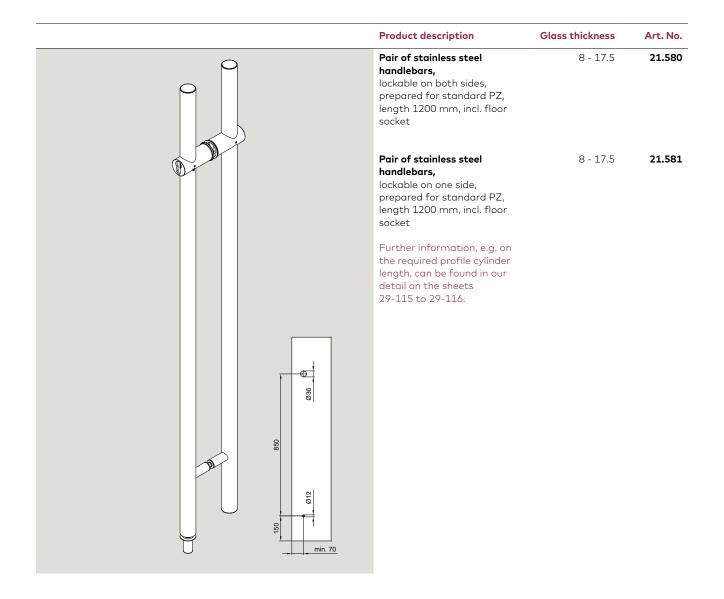

222 Dimensions in mm. 01/25

Pair of pull handles

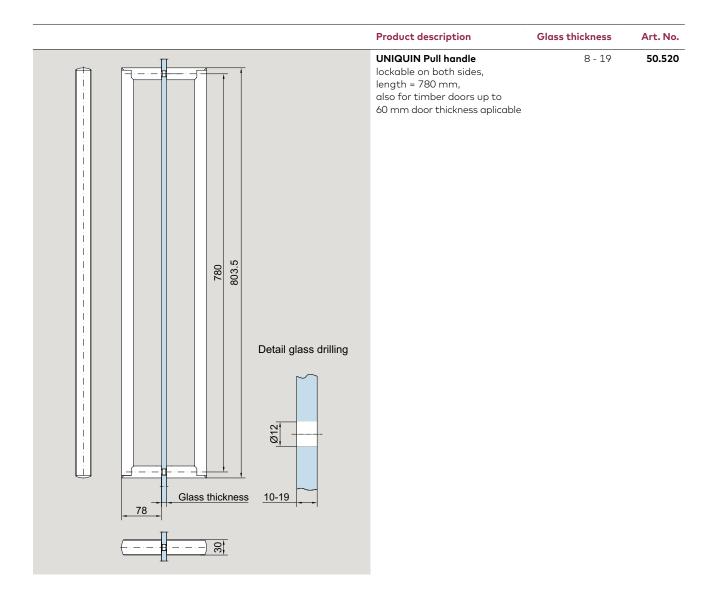


Recessed pull grips and door knobs

	Product description	Glass thickness	Art. No.
Ø 38 mm Glass bore	Recessed pull grip Ø 50 mm	8/10/12	21.290
	Recessed pull grip Ø 60 mm Recessed pull grip with grip hole Ø 60 mm	8/10/12 8 10 12	21.291 21.292 21.293 21.294
Ø 50 mm Glass bore	Recessed pull grip aluminum to be glued onto the glass		07.200
Ø 50 mm Glass bore	Weight in kg: 0.072		07,201
Ø 52 5 Ø 20 mm Glass bore	Door knob, aluminum Weight in kg: 0.400		07.201
Glass thickness Glass thickness Glass thickness	Door knob one side fixing Door knob with single-point fixing, countersunk Door knob with single-point fixings, clamping disc	8/10/12	21.422 21.426
Single-point fixing clamping disc (Ø 22 mm) Glass thickness Glass thickness (Glass preparation please see under "pull handles single", page 242)	Door knob back-to-back	8/10/12	21.423

Note: To ensure better load transmission, please use a pull handle in conjunction with the DORMOTION damping unit.

Accessories / Assembling aid

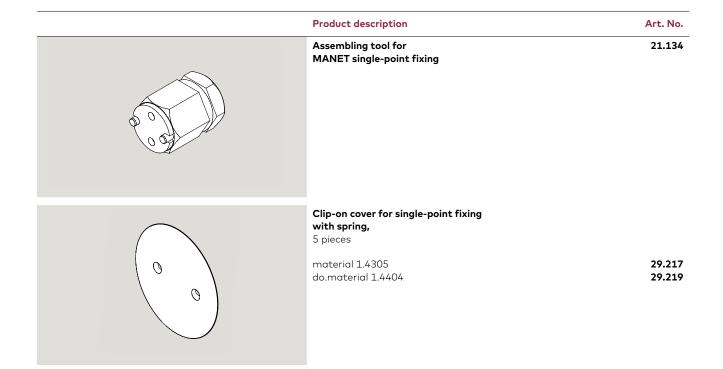

01/22 225

DORMA-Glas Safety-related information

Safety-related information

Important safety-related information for the mounting and use of DORMA-Glas glass fittings.

(Follow these instructions in addition to the mounting and operating instructions in order to avoid damage of product and damage to person or property.)

Important: All users have to be informed about relevant points mentioned in these safety-related information and the mounting and operating instructions!

General information

- DORMA-Glas recommends the use of TSG-H (heat-stored tempered safety glass) according to DIN EN 12150-1.
- 2. DORMA-Glas glass fittings are not suitable for outdoor installation.
- 3. DORMA-Glas glass fittings are not suitable for rooms where chemicals (e.g. chlorine) are used, e.g. swimming pools, saunas and brine baths.







- 4. Sliding panels must not be moved faster than at walking speed and must be stopped by hand before reaching the end positionwill be.
- Pivoting panels must not be thrown too hard. If there is a risk of over-turning, this must be prevented by a door stop.

Mounting

- 1. Only properly qualified and specially trained staff is authorised to mount DORMA-Glas glass fittings.
- 2. Never use glass with conchoidal fractures and/or damaged edges.
- 3. Due to crushing hazards among others in the area of the secondary closing edge and possible injury caused by breakage of glass during mounting, corresponding protective clothing (especially gloves and protective goggles) is required.
- Clean clamping area with fat solvent (standard commercial cleaning agent) before mounting the glass fitting.
- Never use clamping shoes on structured glass surfaces (except on satined glass) or glass of heavily varying thickness unless with a corresponding levelling layer.
- 6. Never use clamping shoes on self-cleaning coatings.
- 7. When adjusting glass elements, always stick to the required clearance for the respective fitting. Adjust clearance so that the glass does not touch hart components such as glass, metal or concrete.
- 8. Make sure not to use excessive force when installing the glass (avoid local stress resulting from very tight screws).

Maintenance

Check fittings at regular intervals for proper positioning and smooth running and door for correct adjustment. Especially highly-frequented door systems require inspection by properly qualified staff (specialised companies or installation firms). Immediately replace damaged class elements (no glass flaking and/or conchoidal fractures)!

General care instructions

The surface finishes of the fittings are not maintenance-free and should be cleaned according to their material and design.

- For metallic surfaces (anodised finishes, stainless steel) please use appropriate cleaning agents without abrasive additives only.
- For varnished surfaces please use appropriate solvent-free cleaning agents only.
- Brass surfaces (without surface protection) have to be treated with an appropriate maintenance agent on occasion, to avoid tarnishing.

For practical planning, please use our drawings DORMA-Glas "The Detail".

The printed colours indicating the surface finishes are not 100 % true, but do provide a useful guide. Statements made with regard to the nature or use of the products are for the purposes of descriptions. Assent with regard to the existence of particular properties or particular uses always requires special written agreement. Pictures may show special designs which are different to the standard scope of delivery.

Subject to change without notice.

226 01/23

Moving Details.



DORMA-Glas GmbH

Max-Planck-Straße 33-45 D - 32107 Bad Salzuflen

T +49 5222 924-0

info@dorma-glas.com www.dorma-glas.com



